SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY AND MANUFACTURES.

Vol. XLI.—No. 26. [NEW SERIES.] NEW YORK, DECEMBER 27, 1879. [$3.20 per Annum. [POSTAGE PREPAID.]

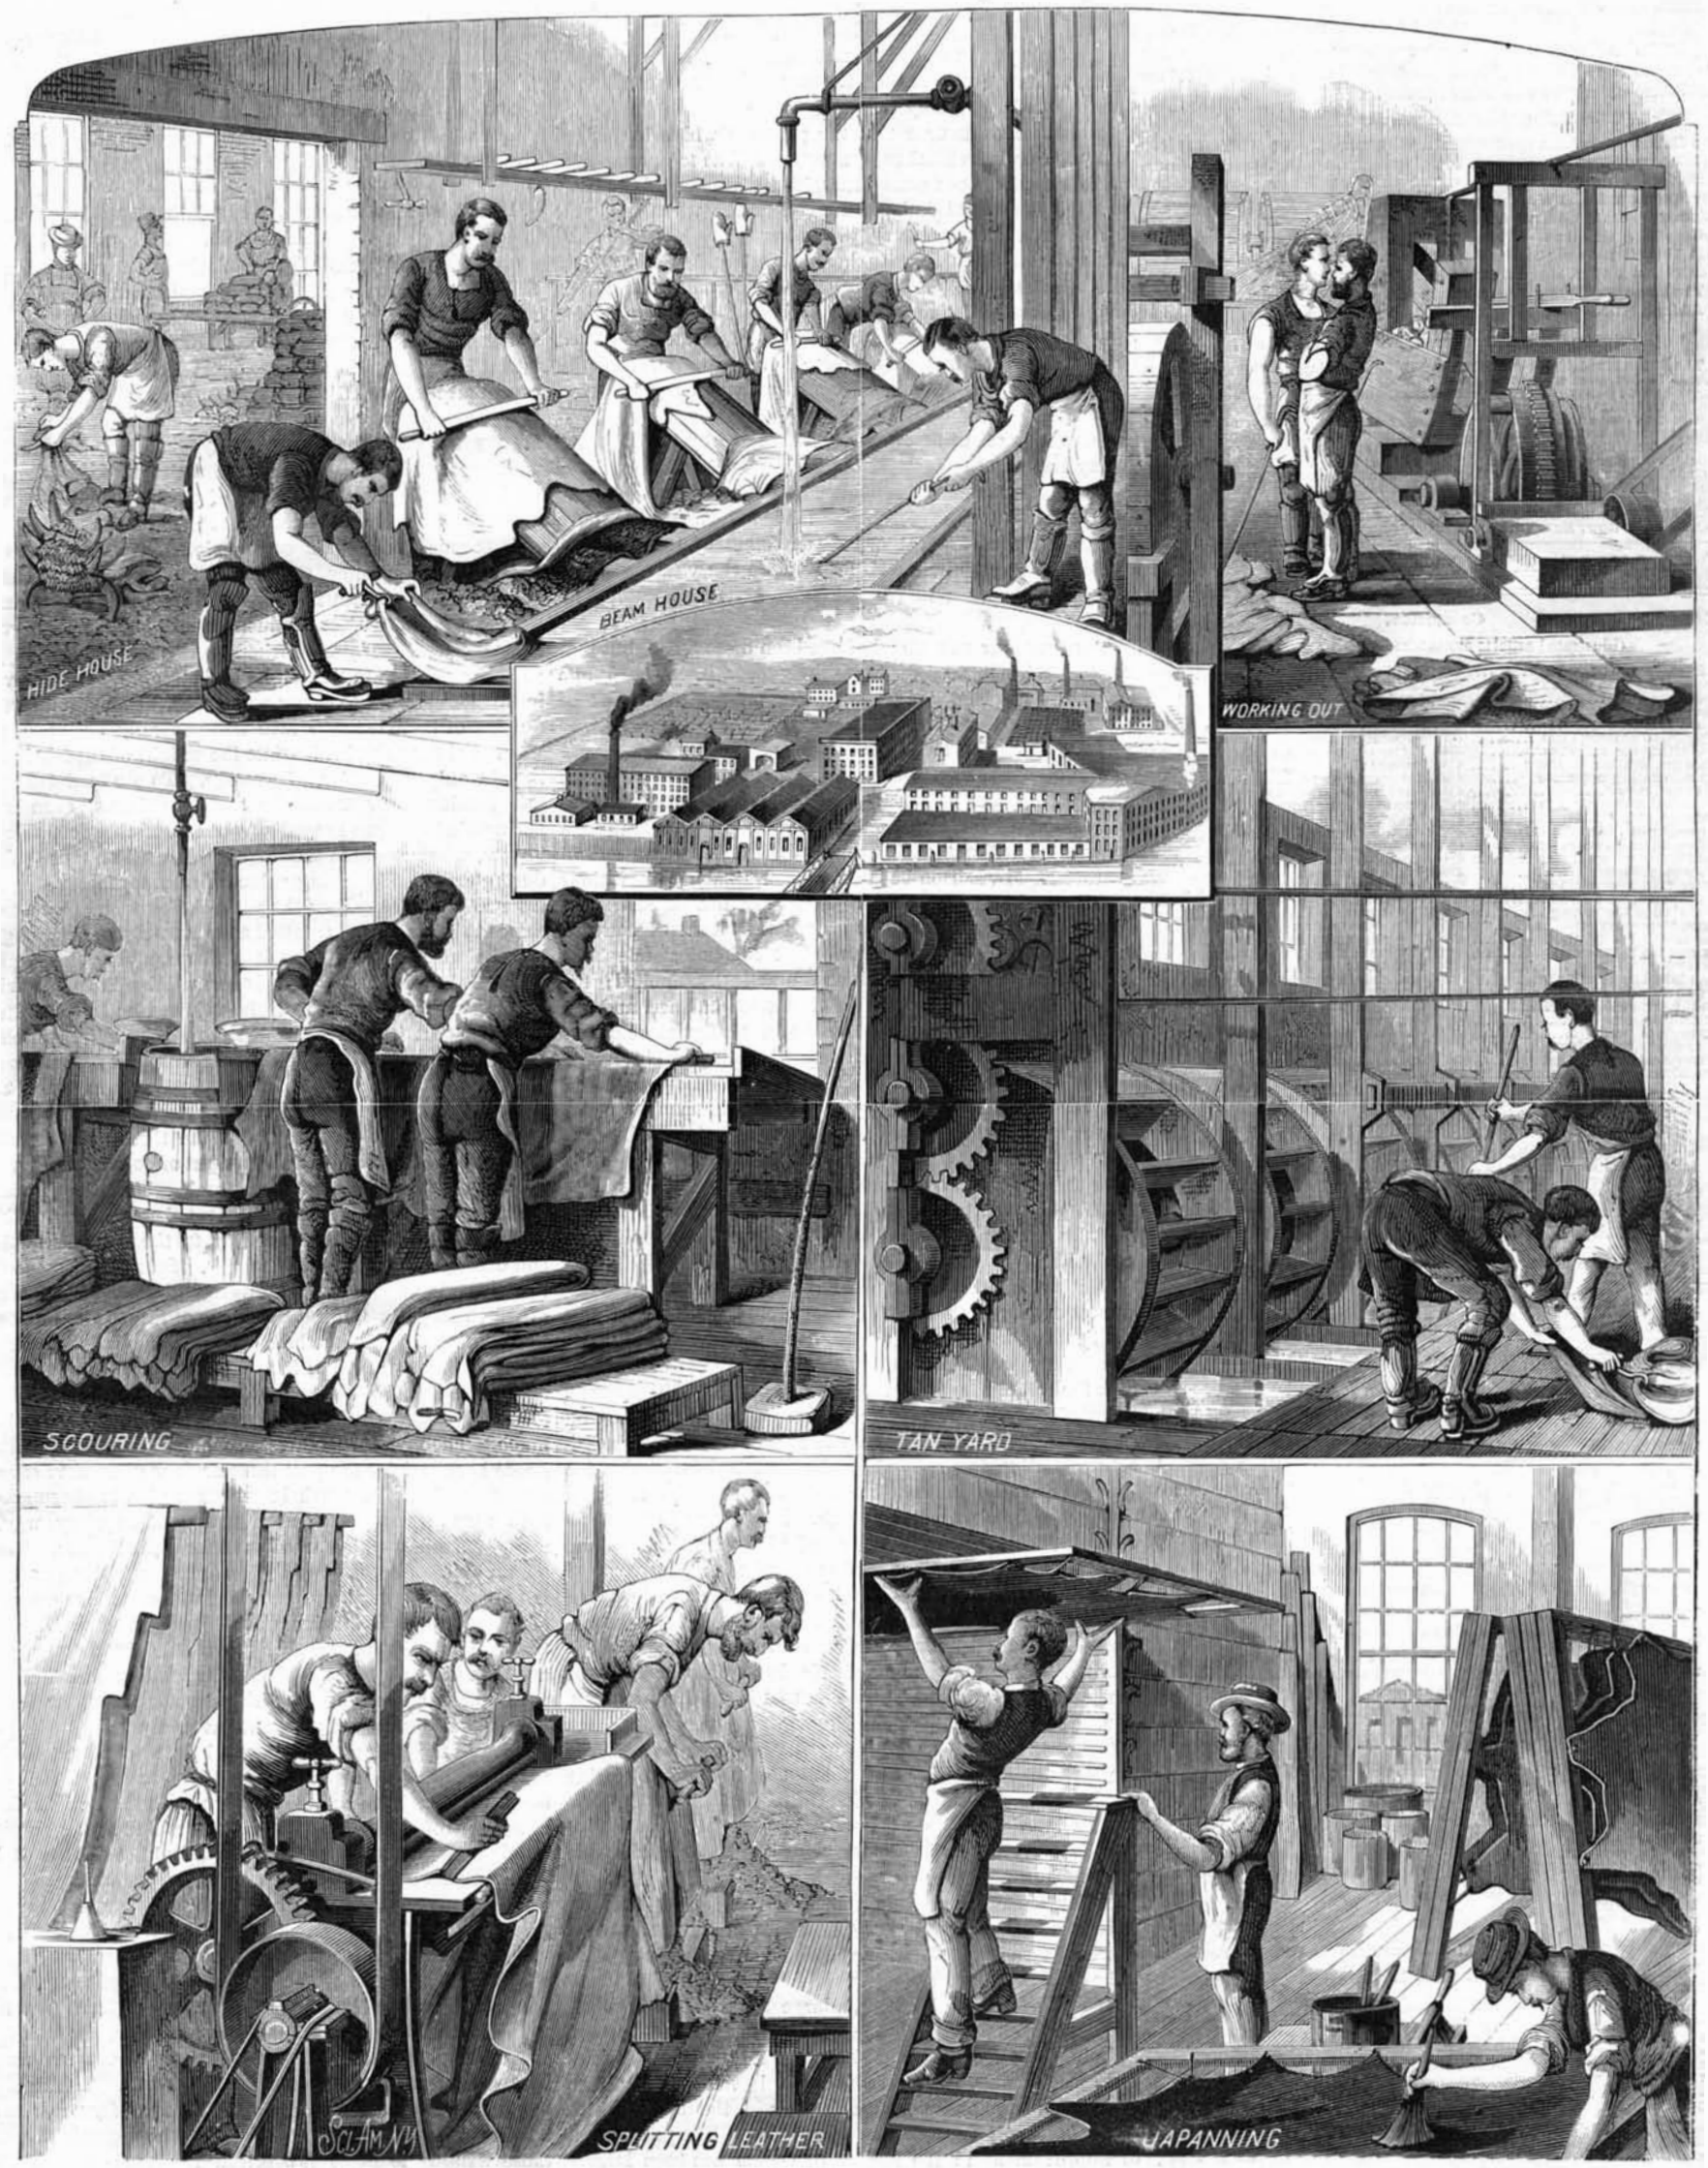

LEATHER MANUFACTORY OF T. P. HOWELL & COMPANY. —[See page 413.]

© 1879 SCIENTIFIC AMERICAN, INC

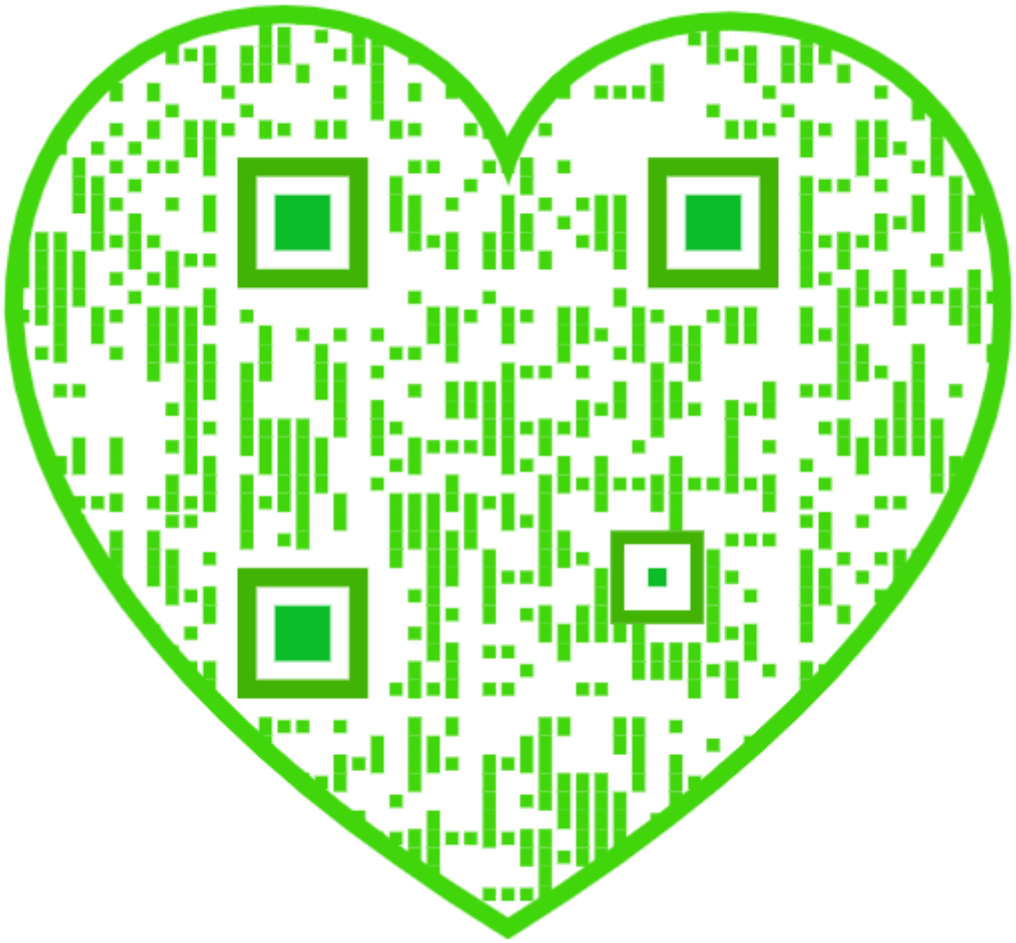

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT
NO. 37 PARK ROW, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, postage included..... **$3 20**
One copy, six months, postage included **1 60**

Clubs.—One extra copy of THE SCIENTIFIC AMERICAN will be supplied gratis for every club of five subscribers at $3.20 each; additional copies at same proportionate rate. Postage prepaid.

Remit by postal order. Address

MUNN & CO., 37 Park Row, New York.

☞ To Advertisers.—The reg lar circulation of the SCIENTIFIC AMERICAN is now **Fifty Thousand Copies** weekly. For 1880 the publishers anticipate a still larger circulation.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, with handsome cover, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, postage paid, to subscribers. Single copies 10 cents. Sold by all news dealers throughout the country.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, postage free, on receipt of *seven dollars*. Both papers to one address or different addresses, as desired.

The safest way to remit is by draft, postal order, or registered letter. Address MUNN & CO., 37 Park Row, N. Y.

Scientific American Export Edition.

The SCIENTIFIC AMERICAN Export Edition is a large and splendid periodical, issued once a month. Each number contains about one hundred large quarto pages, profusely illustrated, embracing: (1.) Most of the plates and pages of the four preceding weekly issues of the SCIENTIFIC AMERICAN, with its splendid engravings and valuable information; (2.) Commercial, trade, and manufacturing announcements of leading houses. Terms for Export Edition, $5.00 a year, sent prepaid to any part of the world. Single copies 50 cents. ☞ Manufacturers and others who desire to secure foreign trade may have large, and handsomely displayed announcements published in this edition at a very moderate cost.

The SCIENTIFIC AMERICAN Export Edition has a large guaranteed circulation in all commercial places throughout the world. Address MUNN & CO., 37 Park Row, New York.

NEW YORK, SATURDAY, DECEMBER 27, 1879.

Contents.

(Illustrated articles are marked with an asterisk.)

Africa, future of..... 409
Air compressor, duplex*..... 410
Alizarine blue 411
American industries..... 413
Ammonia on brass 411
Apples, to preserve (19)..... 417
Ballasting for railways..... 414
Bigelow, Erastus Brigham..... 409
Boat-lowering apparatus *..... 412
Car step, new *..... 414
Chemical nomenclature..... 413
Chinese, ebb of the..... 413
Chinese rods, to make (17)..... 417
Cities, chief, 85 years ago..... 412
Cold wave, where it comes from. 414
Crawshay, Henry..... 409
Dairy fair, international..... 414
Diphtheria, treatment of..... 416
Earth's day increasing 410
Eggs, to preserve (19)..... 417
Electricity for lighthouses..... 410
Export trade increasing..... 413
Extending its use..... 413
Fish killed by electricity..... 412
Flywheel explosion..... 409
Gun, hammerless *..... 411
Health at home..... 416
Household perils..... 411
Inventions, agricultural..... 412
Inventions, mechanical 413
Inventions, miscellaneous 410
Irradiation (23)..... 417
Lake Erie vineyards..... 414
Lead oxide, to reduce (16)..... 417
Leather factory of Howell & Co* 407
Leather, manufacture of..... 413
Mineral oil for lighthouses 410
Potters, American, congress of.. 411
Pulleys (22)..... 417
Railways, life of..... 411
Reading, good for our sons 409
Scientific American for 1880..... 409
Sea serpent, the great*..... 415
Solano—largest ferryboat..... 414
Specimen, singular 415
Steam on Penn. canals..... 412
Steam vessels, inspection of..... 413
Stone dressing tool, new*..... 414
Table salt an aperient..... 416
Tanning materials, new..... 416
Telephone, new*..... 410
Telephoning, long range..... 409
Timber for railroad ties..... 413
Tobacco..... 412
Trade mark law, new..... 413
Trade marks, stamps for..... 409
Trade marks..... 413
Uranium in California..... 413
Woven fabrics, strength of, etc. 408
Year's progress, a. 408
Zymotic contagion..... 416

TABLE OF CONTENTS OF

THE SCIENTIFIC AMERICAN SUPPLEMENT

No. 208,

For the Week ending December 27, 1879.

Price 10 cents. For sale by all newsdealers.

I. ENGINEERING.—The Efficiency of Screw Propellers. Results of Experiments with propellers tending to show that the accepted theory of the increase of resistance with increasing velocity does not apply to extremely high velocities. 8 diagrams of curves, showing the efficiency of different screw propellers.

Heathorn's Steering Gear. A novel device by which rudders may be made to stop as well as steer a vessel. 6 figures.

An Attempt at a Systematic Classification of the Various Forms of Energy. By Dr. O. J LODGE. A much needed and very valuable examination of the theory and nomenclature of energy. Table of classification.

II. TECHNOLOGY.—Fire-brick and Terra Cotta. By ANDREW MCLEAN PARKER I. The fire-brick process. II. The terra cotta process. A valuable practical paper.

Bricklaying in France. Extracts from Artisans' reports on the French Exhibition of 1878. Characteristics of French brick work, wages of bricklayers, cost of bricks, tools, and materials.

Improved Tanning Process. Dr. Heinzerling's new time-saving and economical method.

Printing Recipes. "Steam" amber, dark brown, green, purple.

Glycerine and Carbolic Acid for the Preservation of Hides.

III. HEAT, ELECTRICITY, ETC.—Coret's Metallic Thermometers. 2 figures. A new, cheap, and sensitive apparatus.

Breaking Horses by Electricity. De Foy's apparatus. 1 figure. A galloping horse suddenly brought to a standstill by the action of the electric bit.

Reynier's New Incandescent Electric Lamp. A novel and simple arrangement. 2 figures. Carbon holder and lamp in globe.

Electric Illumination. By M. TOMMASI.

IV. CHEMISTRY.—Determination of Potassa and Soda in Minerals. By W. KNOP and J. HAZAN.

Ferric Hydrates. By Dr. D. TOMMASI.

Active Matter of Malt or Maltinand Diastase. By M. DUBRUNFAUT.

Tests for Traces of Mercury. By ED. TEUBER.

V. GEOGRAPHY, ETC.—The Proposed Mission in Central Africa. By Rev. JOHN O. MEANS, D.D. With map of Africa. An exceedingly valuable review of recent explorations in Africa, the present condition of the Continent, and the grounds for anticipating the rapid opening up of the entire country to civilization

The Wonders of Geographical Evolution. Lessons to be learned among mountains. The chronicles of the globe, and how they are to be read.

The Great Glaciers of Eastern America.

A Remarkable Cave in Brazil.

Pliocene Man. By Dr. CHARLES C. ABBOTT. Review of Professor Whitney's memoir on Prehistoric Archæology. The missing link still missing. Man nothing but man, whether found in Pliocen, Post-pliocene, or recent formations.

Geodes. The Geode District of the Mississippi Valley. Characteristics of geode.

VI. SOCIAL SCIENCE.—Comparative View of American Products. Continued from No. 207. Progress in mining. The drift of population. Comparative advantages of the Eastern, Middle, Southern, and Western States for mechanics. The great crops in different sections. Average yield of great cereals in the Eastern, Western, and Southern States, and average value of yield per acre. Value of sheep, cattle, and hogs in Eastern, Western, and Southern States. Conditions of stable prosperity.

VII. MICROSCOPY AND MEDICINE.—Aspergillus in the Living Human Ear. By Dr. CHAS. HENRY BURNETT. Early observations of fungi growing in living tissue. Aural fungi. Microscopic features of aspergillus. Macroscopic features. Symptoms. Etiology. Treatment.

VIII. HORTICULTURE.—Curl in the Peach.—Late Peaches.—Early Freestone Peach.—Good Culture of an Orchard.

A YEAR'S PROGRESS.

During the twelve months now drawing to a close there have quietly happened not a few events which in times of slower progress, when great projects and great achievements were less a matter of daily occurrence, could scarcely have failed to make a grand stir in the world. There can be indeed no stronger proof of the exceptional character of the present time than our proneness to accept such things as matters of course. It is only when era-making events become common that they cease to be remarkable.

The regular readers of the SCIENTIFIC AMERICAN do not need to be told at this late day what important, if not memorable, occurrences in the world of progress—commercial, industrial, and scientific—have characterized the past year. Having followed from week to week this record of the world's most effective thought and action, they are already possessed of the grand results of the year's activities. It may not be unprofitable, however, before closing the history of the year, to recall to mind some of the more significant of its events, some of the more notable movements of progress it has developed.

It is safe to assume that the progress which has added most to our individual enjoyment, as well as to our national well-being, has been connected with the wonderful improvement in industrial and commercial affairs which the year has shown. The country was never more generally and earnestly at work than to-day, and was never working to better advantage. And, although in certain quarters an over-eager speculative spirit forbodes disaster to many, there is every reason to hope that the solid industries of the land will not be seriously infected, or seriously injured by the natural and inevitable consequences of speculative "booms."

Of purely scientific events it is hard to say which of the many important ones stand out most prominently; and the work of discriminating is made all the harder by the circumstance that the achievements first made known this year have largely been, as usual, the final outcomes of long series of patient labors; while the larger part of the year's work of our scientific men, in the field and in the laboratory, remains unreported.

Three or four new metals have been discovered; but that sort of thing has ceased to excite general interest. While one class of chemists has been thus adding to the list of elements, another class has been working with no slight promise of success to show that several if not all of the elements are but variant forms of one matter stuff. Meantime Mr. Crookes has been carrying forward his researches in connection with the ultra-gaseous state of matter, though apparently without making any discoveries of a radical character. Mr. Edison has made some valuable observations with regard to the behavior of highly heated metals in vacuo, and has materially improved the means of converting power into electricity. His electro-chemical telephone has been rapidly developed and practically applied; the sonometer has grown out of his induction balance, and the micro-telephone has been the basis of not a few more or less useful instruments of physical or physiological investigation. Mr. Edison's call for platinum for his long promised electric lamp has resulted in the discovery of many deposits of the metal in the West and elsewhere. A late dispatch from Colorado reports the discovery of the rare metal uranium in the Sacramento mining district. The ore is said to run 60 per cent; but the probable quantity of ore in the deposit is not mentioned. The development of the mines of gold and silver in the West during the year has been very rapid; and close at home we have the discovery in Westchester county, New York, of what promises to be of greater utility than any mine of gold or silver, namely, vast deposits of excellent emery. Another matter of local interest has been the addition made by the State surveyors to the accurate knowledge of the geography and topography of the central parts of New York. The work of geological and geographical exploration in the West has been pushed forward not a little during the past season; and the Canadian geological survey has done much good work. Further north the expedition in search of the remains of Sir John Franklin have made valuable corrections in the map of the region north of Hudson's Bay. On the opposite side of the continent the Jeannette has made a bold and promising push into the unexplored regions within the Arctic circle north of Behring's Strait. The safe passage of Nordenskjöld through the Siberian seas is the most notable event in northern exploration. Prejvalski and other Russian explorers have been doing good work in high Asia. Major Pinto has crossed the African continent; and a large number of exploring parties have pushed in various directions into the little known interior. The last report of importance mentions the discovery of the head springs of the Niger by a couple of Frenchmen.

In Australia, Forrest has made a bold and successful passage across regions hitherto unexplored, discovering vast tracts of farming and grazing lands where all was supposed to be desert.

In the field of engineering, a large number of important undertakings have been brought to successful issue, particularly in the construction of long and lofty railway bridges and great tunnels. Among the latter is the famous Sutro tunnel, and we are almost able to add the St. Gothard, which is rapidly approaching completion. The great work of improvement in the harbor of Genoa has been largely advanced; considerable good work has been done in the Hell Gate channel of New York harbor, and on the proposed tunnel under the Hudson. Several extensive ocean piers have been constructed at Long Branch and Coney Island. The mouth of the Mississippi has seen the practical completion of the opening of its channel to deep-draught shipping. A new Atlantic cable has been laid, and other works of the same character have been carried out in the Indian Ocean and elsewhere.

These are but a few of the topics of more than temporary interest which the readers of the SCIENTIFIC AMERICAN will recall. To speak of the important projects proposed, discussed, or actually begun during the year—like the proposed ship railway across the Isthmus of Panama, for example—would swell this article, already too long, beyond all reasonable limits. Besides, our readers do not need to be specially reminded of them. Enough appears at the hastiest glance to show that progressive men have not been asleep during the year, and that those who have cared to read about the world's real work have not lacked material for engaging their attention. This, not to speak of the hundreds of inventions described and figured in our pages; the numerous illustrated papers on our great industries; the illustrated papers on practical mechanics, and the many suggestions for inventive work that have been furnished from time to time.

STRENGTH, WEIGHT, AND FINENESS OF WOVEN FABRICS.

The last few years of particularly close competition in finding a market for all kinds of manufactured goods has rendered necessary very close attention to many little details which has before escaped notice, or were considered too trivial to be taken into account. It has been found, however, that these small items have often made the difference between a paying and a losing business, and, as is almost always the case, the closer study given to the practical working up of stock, in order to make these savings, has made possible a higher standard of excellence, and secured greater regularity and evenness in the production.

In the making of plain cotton cloths, as at present conducted in this country, we find an illustration of probably as great improvement in this direction as can be pointed out in almost any of our industries. It is but a few years since when all the yarn worked up was largely put in the goods by guess as to its weight and strength, or with very insufficient tests as to either point, and, although a certain number of threads to the inch was generally designed, this was not always obtained, while the weight of the fabric was largely only a question of average. To do business after this fashion now would be simply ruinous, even supposing that goods so made would meet the demands of buyers, who have been thoroughly educated on these points during the steadily falling values of all manufactured goods from 1873 to 1879. Now the yarn, almost from the time it ceases to be "roping," is tested as to its weight and strength, and, before it is ready to go to the loom, a very close standard must be obtained. This is secured by frequent trials for strength in a tester so nicely adjusted and so delicately balanced that it will determine the strain under which a thread will break even to the thousandth part of an ounce, and by scales which will show the slightest variations. The different qualities of cotton, of course, give varying results as to strength, but the fineness of the thread, the number of threads to the inch, and the weight of cotton to the yard (as also the amount of sizing or starch, which all our manufacturers use, though to a less extent than is done in England), must run exactly according to the specified quality and description of goods to be made. It is common enough for buyers to have little magnifying glasses, with the aid of which they can count the number of threads to the inch, but it is not so easy for them, after the goods are made, to determine the strength of the thread to a nicety, or tell how much of the weight has been added in sizing—at least, these are points about which very few of them trouble themselves much. The very low figures at which all kinds of cotton goods have sold for the past three or four years have caused the production of a much larger proportion of cheap goods than usual. Manufacturers have sought in every way to make something which would sell for a small price. Their efforts in this direction have given them a better gauge of the different points of superior or inferior goods than most of those who handle their products have yet attained. It is true, we have heard frequently how much better our goods are than some of those made in England, and how much more starch and sizing English manufacturers put in the finished cottons they export, and, as to a considerable proportion of the goods we make, we have no reason to doubt their superiority. It is equally true, however, that our manufacturers have nothing to learn from those in England in the way of cheapening their goods, and in making a poor article look like something a good deal better than it is. While we keep from sending such goods abroad we shall probably retain, and may even improve upon, the reputation we have already obtained, but our foreign competitors will be so exceedingly watchful that any progress we make will only be a success well earned. In the goods made for home consumption, however, it will be well for buyers not to take too trustingly anything offered them, on the broad ground that American cotton goods, because they are made here, are necessarily honest and well made. This used to be the rule a few years ago, but our manufacturers have now learned so well how to cheapen their goods that all those wishing to place low priced fabrics on the market, and such too as will look as well as those of higher cost—are thoroughly informed as to the manner of doing it.

© 1879 SCIENTIFIC AMERICAN, INC

ERASTUS BRIGHAM BIGELOW.

In the death of Erastus B. Bigelow, America loses another of the great inventors whose genius has so largely helped to raise her industrial prosperity to its present high position. Thirty-five years ago all carpets were woven on hand looms. The cost of labor in this country made it impossible for American carpet makers to compete in cheapness with the work turned out by the ill-paid hands of England and France; and even then, the high price of carpets made them rather an article of luxury than one of everyday use and convenience. In 1842 Mr. Bigelow, after making several useful though less important inventions, perfected a series of devices for making the carpet loom automatic, so that the costly labor of man might be displaced by the cheaper labor of women or boys.

After many unavailing efforts to induce carpet makers to undertake the manufacture by the new method, Mr. Bigelow succeeded in persuading the Lowell Manufacturing Company to make the experiment, and in 1845 the successful weaving of ingrain carpets by power was demonstrated. Subsequently Mr. Bigelow achieved the invention of power looms for the weaving of Jacquard Brussels, and Wilton carpets. To apply these inventions the inventor was compelled, in 1848, to set up a factory of his own. This establishment, at Clinton, Massachusetts, has grown to be the largest in the world for the manufacture of Brussels and Wilton carpeting, in which the several processes of worsted spinning, dyeing, and weaving are united in one concern. We may also set it down to the credit of Mr. Bigelow's inventions largely that the United States now leads the world in carpet production.

Mr. Bigelow was born in West Boylston, Mass., April, 1814, and died at his home in Boston, Saturday, Dec. 6.

REMARKABLE FLY WHEEL EXPLOSION.

On the night of December 5, 1879, the Rensselaer Iron Mill, at Troy, N. Y., was the scene of a most remarkable accident. The newspaper report says:

"It was about 10 o'clock, and the 200 workmen were busily engaged at their various tasks. Suddenly the large flywheel, 35 feet in diameter, and weighing 60 tons, exploded, it being separated into 10 pieces of about 6 tons each. Each of these pieces was hurled for some distance, several of them being forced through the roof. One passed through the air about 200 feet, and descended through the roof of a neighboring mill. Striking upon the iron floor, it bounded for a distance of 30 feet, settling within three feet of a nest of two boilers. Several workmen were about passing when the ponderous fragment entered, and their escape from death was narrow. James Wallace, a heater, was buried beneath a five ton piece of the wheel, and when extricated was still alive. He cannot recover, however, his skull being fractured, and he having been injured internally. In places the roof was completely destroyed. The damage will not fall short of $10,000. Work will be necessarily suspended for two weeks or more. The escape from a boiler explosion was exceedingly narrow, a piece of the bursted wheel, weighing six tons, falling between two of another nest of boilers, and destroying a portion of the brick work. Had the mass crashed through the boilers, the loss of life would have been large. Another fragment descended through the roof, breaking a steam pipe and burying itself through the floor at a spot where a workman had been standing not five seconds before. The wheel had been in use 11 years, often subjected to inspection, and the cause of its explosion is a mystery."

We trust that the causes of this extraordinary accident will be investigated by competent mechanical engineers, and the whole matter explained for the public benefit. We should be glad to receive full particulars with drawings for publication, if any of our friends can supply them.

A somewhat similar occurrence took place in this city in June, 1876, at the Kuntz Brewery, Third Avenue. In this case the fly wheel was only 9 feet in diameter, weight 3,600 lb. We gave at that time an extended report of the affair, with drawings, which showed beyond all question that the accident was due to carelessness and botching in the original fitting together of the wheel.

If there is any one part of a machine that requires more intelligence, skill, and minute care in its construction than another, it is the fly wheel. And after the wheel is put into use no other portion of an engine needs more frequent, careful inspection, and tapping, for the detection of flaws or the incipient loosening of parts, than the fly wheel. But we fear that both in the use and in the construction, carelessness is apt to be the rule and carefulness the exception.

THE SCIENTIFIC AMERICAN FOR 1880.

Like all the rest of American institutions, the SCIENTIFIC AMERICAN closes the year with the most assuring prospects of prosperity in the year to come. There never was a time when our patrons in the scientific and industrial world were more numerous or more successful in their undertakings, or had more solid grounds for looking backwith satisfaction, or forward with confident expectation of increasing prosperity. The country has entered upon a period of successful activity which has made the past year profitable beyond precedent; and the coming years bid fair to surpass it in solid gains. Having taken possession of the vast and varied markets of our own land, our farmers, manufacturers, and merchants are reaching out to the earth's remotest ends, with every prospect of retaining and increasing their hold upon the world's most profitable trade.

From its intimate connection with all the great and growing material interests of the country the SCIENTIFIC AMERICAN cannot but share largely in the country's general prosperity; and the publishers are determined to make it more and more worthy of its position as the most popular scientific and industrial paper in the world. With a circulation of 50,000 copies every week, among the most intelligent and active men of the country, the men who are doing the country's best work and contributing most to its industrial and commercial activity, the SCIENTIFIC AMERICAN has a basis of permanent prosperity unrivaled among newspapers, and can offer to advertisers a medium for reaching customers unequaled in scope and directness. In addition, its monthly EXPORT EDITION, with a guaranteed circulation in all the principal cities and commercial centers in the world, is probably doing more to spread a knowledge of American pro ductive industry throughout the world than all other periodicals combined. An examination of any issue of our EXPORT EDITION will show how widely its advantages as an advertising medium are appreciated by our great manufacturers and merchants engaged in foreign trade.

With reference to matters more strictly personal, it may not be improper to say that the increasing favor with which the SCIENTIFIC AMERICAN is received by intelligent readers at home and abroad is the surest guarantee that the work it is doing is approved by its numerous friends.

As its circulation increases the possibility of adding to the scope and value of the matter it offers from week to week increases proportionally; and it is the purpose of its publishers not to slacken their efforts to make the paper increasingly worthy of its name and reputation. One great advantage of its widening circulation is the wider range of information it receives with regard to scientific discoveries, trade prospects, and commercial changes, from its friends in all parts of the world; and just here we may properly express our thanks for such communication from United States consuls, travelers, the heads of foreign business houses, and others, who have thus added materially to the interest and value of our pages. It is enough, in the way of promise for the future, to say that the coming volume of the SCIENTIFIC AMERICAN will not be inferior to those of the past, and will be as much better as experience, increasing facilities, and strenuous effort can make it.

Among a number of valuable and interesting subjects in hand for early issues, we may mention an article fully illustrating the central office system of telephonic communication, which is becoming so important a factor in modern social and business life. The illustrated articles on amateur mechanics, which have been so favorably received during the past year, will be continued; so, also, will the valuable series describing and illustrating our great manufacturing industries, and a larger share of attention will be given to practical mechanics and improvements in the various arts and other productive industries.

The SCIENTIFIC SUPPLEMENT will, as heretofore, give, in addition to many valuable original papers on scientific and mechanical subjects, a careful selection of all the more important discussions in the various departments of science and art made in all parts of the world. As hitherto the SCIENTIFIC AMERICAN will publish every week a full table of the contents of the SUPPLEMENT, so that those who are not subscribers to both papers may learn whether the SUPPLEMENT contains matter which is of especial interest and value to them.

THE FUTURE OF AFRICA.

What the eighteenth and nineteenth centuries have done for America the twentieth is likely to do for Africa. Civilization is attacking her ancient fastnesses from all sides. Europe is especially alive to the enormous capacities of the continent for trade. A score of more or less powerful missionary societies are bent upon the evangelization of its swarming millions; and with the facilities for rapid progress furnished by steam and electricity the speedy conquest of the interior by Christianity and the arts of peace is all but assured. Unlike the Americas, when first discovered, Africa is well peopled by nations for the most part well advanced in civilization, and ready to become important factors in the industrial and commercial world. They are far enough advanced to be large producers of many things that the industrial world has need of, and are equally well calculated to become large consumers of industrial products.

What with telegraphs along the coast, steamers and railways pushing inward along its ancient lines of traffic, the suppression of its external slave trade, the pluck and energy of scientific, missionary, and commercial explorers, and the great wealth of the national and international societies bent upon the early evangelizing of the African peoples and the commercial development of the enormous natural capacity of the country, we may reasonably expect in the near future an awakening in Africa as marvelous as anything the world has yet witnessed. Dark as its present condition is, Africa is a land of splendid possibilities.

It is not surprising, therefore, that commerce is studying its newly opened regions with keen interest; or that the ecclesiastical world is showing the liveliest concern for the future of regions which promise to be the seats of great Christian nations,

For a comprehensive, exact, and trustworthy survey of the real condition of this vast continent, its physical and ethnological characteristics, the recent work of its numerous explorers, the prospects of the various missionary enterprises on foot there, and the most suitable places for new undertakings, nothing could be more satisfactory than the paper read by the careful and learned recording secretary of the American Board of Christian Foreign Missions at the late meeting of the board of commissioners of the society at Syracuse. The paper is published in full in the current number of the SUPPLEMENT, in connection with an excellent map of Africa, embodying the results of all recent explorations.

STAMPS FOR TRADE MARKS.

In another column a correspondent proposes a method by which Congress might give protection to trade marks incidentally, under its power to levy and collect taxes.

Briefly stated, the plan is for the Bureau of Internal Revenue to make and issue to each manufacturer, who should want protection, a special stamp bearing his trade mark, as is now done in the case of patent medicines; these stamps to be sold nominally for revenue, but really for that protection to the manufacturer which might be provided under existing laws against the counterfeiting of revenue stamps. The tax thus levied would be uniform throughout the United States, thereby conforming to the requirements of the constitution; but the payment would be optional with those who desired its indirect protection.

The suggestion is a clever one, but open, we think, to several serious objections. The stamps would be expensive, even were the government to furnish them at cost. The labor of attaching them to each article to be protected would add another large item to the expensiveness of the proposed method. And still worse, it would be quite impossible to make the stamp permanent. The trade mark on a piece of chinaware, for example, would lose half its value if it could not be wrought into the material or imprinted upon its surface so as to stay. The same may be said of most lines of metal manufactures, woodenware, and so on. A stamp for revenue purposes, on the contrary, is intended to be quickly, surely, and easily destroyed. The existing system of State registration, imperfect as it is, would seem to be less troublesome, cheaper, and more efficient.

Henry Crawshay.

Not six months ago we had occasion to notice the death of Robert Crawshay, the great iron master of Merthyr Tydvil, Wales. About a year before, his brother, Francis Crawshay, died; and now we have to note the death of Henry, the last remaining son of William Crawshay, the great iron king of Cyfarthfa. A full account of the vast establishments built up by the elder Crawshay and his sons was given in this paper last June. When he died he left the whole of his valuable property in the Forest of Dean to Henry Crawshay, Cyfarthfa to Robert Crawshay, and Treforest and Hirwain to Francis Crawshay. From the time he came into possession of this property until the depression in the iron trade Henry Crawshay continued to increase and improve his inheritance, the total amount of ore worked between 1860 and 1870 reaching nearly 400,000 tons. At the time of his death he was preparing to enter extensively into the tin plate trade. He was the nearest likeness to his father among the three sons, and had all his father's perseverance and intuitive power. He was rugged in manner, but generous hearted, and won the hearty reliance of all by his unswerving probity. He died November 24, aged seventy-six.

Long Range Telephoning.

In a recent issue of this paper an exchange was credited with the statement that Mr. Robert Packer, "superintendent of the Pennsylvania Railroad," while traveling in Nebraska had conversed with his wife and friends at his home in Sayre, Pa., two thousand miles distant, by means of a telephone.

We now learn on good authority that, though Mr. Packer's friends received his communication by telephone, it was not so sent by Mr. Packer. The message was sent from Nebraska to Mauch Chunk, Pa., by telegraph; thence it was telegraphed to the Sayre office of the Pennsylvania Canal and Railroad Company (of which Mr. Packer is superintendent), and from there it was transmitted to Mr. Packer's house by telephone—falling short of the newspaper report of the telephone's performance by some nineteen hundred and ninety-nine miles and a fraction.

Our Sons Need Good Reading.

"I wish that my son had more of a taste for useful reading and study." Such is the lament one often hears from anxious fathers. To interest their children in things that are beneficial, thus to save them from bad company and pernicious habits, is the constant aim of every faithful parent. One excellent means to this end consists in making the SCIENTIFIC AMERICAN a regular visitor at your dwelling. Let it be in sight on your bookcase or table, and notice how quickly it attracts the young. Its pages are full of the most interesting, varied, and useful information, the study of which insensibly excites the mind with a desire for more; and this desire, once fairly kindled, endures through life, expanding and ennobling the intellect. A new volume of the SCIENTIFIC AMERICAN commences next week. Fathers, subscribe for your sons if not for yourselves.

Recognition of American Merit.

IN the Transactions of the Institute of Naval Architects, London, England, 1879, are the names of John A. Tobin, Engineer Corps, U. S. Navy, J. B. and N. G. Herreshoft, United States America, all of whom were elected members at the last meeting.

© 1879 SCIENTIFIC AMERICAN, INC

Mineral Oil and Electricity for Lighthouses.

The annual report of the Lighthouse Board says that the substitution of mineral oil as an illuminant has been made in many of the fourth, fifth, and sixth order lights. All of these orders of lights would have been supplied except for the fact that it is found that the oil deteriorated when placed in the ordinary large oil butts in use, and many small cans have had to be made, into which the supply of each station is placed. The great superiority of mineral oil as an illuminant over all other oils has induced the board to try the experiment of using it in the lightships. The oil used for this purpose is 300° of the flash test. It is thought that such oil, used in the Funck lamp, will much increase the usefulness of the lightships, and a great saving in the cost of oil will be made.

The board is desirous of making experiments to test the relative merits of the electric light and other illuminants. These experiments must be made in some lighthouse and on a sufficient scale to exhaust the subject. There are many machines for generating electricity, several of them of American invention, and the board wishes to test the principal ones. An appropriation of $50,000 is asked for the purpose of making these experiments.

An appropriation of $50,000 is asked for the construction of a first-class lightship, fitted with a powerful steam fog signal, to take the place of the lightship now off Sandy Hook, entrance to New York harbor. This is regarded as one of the most important light stations on our coast; and as an immense commerce flows past it, it should be marked by a vessel having all the modern improvements, to make it a more certain guide to the mariner. Should an appropriation be granted, the present lightship could be moved to a less important station.

The Earth's Day Increasing.

In a recent lecture on "Eclipse Problems," Professor Charles A. Young, of Princeton, said, with reference to the observed increase in the rapidity of the moon's motion, that the discovery led at first to the opinion that the moon's orbit was growing shorter, and that ultimately the moon would come down upon us. More accurate calculation, however, shows that there is no danger of so disastrous a result. The moon is not coming nearer, but our day is growing longer, owing to the friction of the tides upon the earth's surface. The tides act like a brake, and slowly diminish the speed of the earth's rotation.

THE DUPLEX AIR COMPRESSOR.

Although compressed air cannot, under ordinary circumstances, compete with steam as a motive power, the machinery necessary to its use has been perfected to such a degree that it has been extensively applied to mining, quarrying, and engineering purposes, and it seems to be the only available motive agent for such uses. Compressed air as a motive power has been the subject of a great deal of practical investigation and experiment, and the losses arising from increase of temperature by the compression of the air and the cooling by expansion, also losses due to the resistance of the valves, and dead spaces at the ends of the compression cylinders, have all been reduced, if not avoided altogether.

The annexed engraving represents the duplex air compressor manufactured by the National Drill and Compressor Company, of 76 and 78 Center street, New York city. This machine, though quite plain in appearance, is of unusual strength and efficiency. We are informed that the performance of this engine is fully equal to that of the best engines in market. The dimensions of the compressor are as follows: Length of bed, 12 feet 6 inches; height of center of cylinders from floor, 18 inches; diameter of steam and air cylinders, 10 inches; stroke of pistons, 18 inches; length of connecting rod, 52 inches; diameter of wheel, 5 feet 6 inches; number of revolutions per minute, 133; cubic feet of free air compressed per minute, 436; weight of machine, 11,400 lb.

Steam is admitted to the steam cylinders by a slide valve having an automatic cut-off. The air cylinders are lined with composition, and kept cool by water which passes spirally around the cylinder from the center toward the ends. By this arrangement the air cylinder is kept cool without having water in the cylinder. The air piston is adjustable, and travels to within one thirty-second of an inch of the cylinder heads. The induction and eduction valves are made so that they can be removed without disturbing other parts of the machine.

The National Drill and Compressor Company build single and duplex compressors of different sizes, which may be run by direct connection with steam engines, as in the engraving, and others which may be run by belts or gearing from the shafts of water wheels or other motors; they also make a variety of rock drills and mining machines which are in use and well known in all parts of this country, and are widely and favorably known in foreign countries.

A NEW TELEPHONE.

In the telephone shown in the annexed engraving the inventor has made use of Jamin laminated U-magnets to secure great magnetic power with little weight. The ends of the magnet are cut off diagonally, and the poles are each surrounded with a helix of fine insulated copper wire connected as in an electro-magnet. Two of these magnets are attached to an elliptical hoop, which surrounds the head and supports

NOVEL TELEPHONE.

the diaphragms and ear pieces. Each diaphragm carries a light triangular armature, which fits the poles of the magnets and nearly touches them. The telephones are connected with each other and with the line. The operation is similar to the Bell telephone. The instrument shown in the engraving is arranged as a receiver to be used with any of the ordinary transmitters, but it may be arranged as a transmitter.

Mr. Andrew C. Hubbard, of Danbury, Conn., is the inventor of this telephone.

A NOVEL system of insurance for girls has existed for several generations among the Danish nobility of Copenhagen. A nobleman, upon the birth of a daughter, enrolls her name with the insurance society, paying at the time a fee, and subsequently an annual sum, until she reaches twenty-one. She then becomes entitled to a fixed income from the society, and to apartments in the large building of the association, which is surrounded by gardens and a park. Should her father die in her childhood, she may immediately occupy the apartments. Should she die or marry, the income and the right to entail the home both lapse.

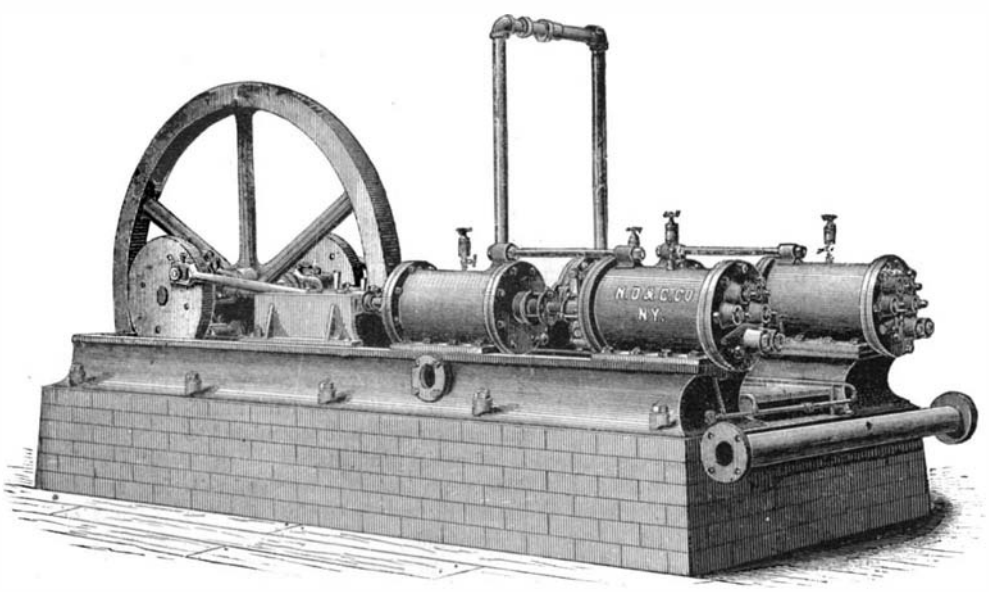

DUPLEX AIR COMPRESSOR.

MEN of science, students, inventors, and every other class of persons desirous of keeping up with the times should become regular subscribers to this paper. They will find it a paying investment, for the SCIENTIFIC AMERICAN not only contains a record of all the important discoveries and inventions of this country, Great Britain, and other English speaking countries, but translations from the French, German, and other foreign scientific and industrial publications.

MISCELLANEOUS INVENTIONS.

Mr. Judson S. Corbin, of Clinton, Iowa, has patented an improved gate, which is so constructed that it may be opened and closed by the wheels of passing carriages. It is simple, convenient, reliable, and not liable to be obstructed or get out of order.

An improved water closet cistern has been patented by Mr. Hugh Houston, of Pittsburg, Pa. The object of this invention is to provide an improvement in that class of automatic overflow cisterns for water closets, whose discharge is so regulated, by means of an overflow compartment or chamber and float and valve connected therewith, that the discharge occurs at regular intervals, and each time gives the water closet bowl a sudden flush and thoroughly washes it out.

An improvement in letter boxes has been patented by Messrs. Wauhope Lynn, of New York, and Gottfried Clasen, of Brooklyn, N. Y. It consists in providing the box with a tube extending from the slit at the top inward and downward, and closing the lower end with spring doors having arms in position to be operated upon by a plunger connected with the hinged door covering the slit at the top on the outside, whereby, when the outer door is opened to put a letter in the box, the doors at the end of the tube are closed, thus cutting off communication through the tube with the interior of the box; but when the letter is slipped through the slit and the outer door allowed to close, the inner doors open and permit the letter to fall within the box.

Mr. Theodore L. Wiswell, of Olathe, Kan., has patented a combined buckle and trace carrier, consisting of a metal skeleton buckle frame having hooks located opposite each other, and having their ends bent inward, then forward and downward, to adapt them for holding the cockeyes of the traces securely when the latter are not in use, and yet permitting convenient detachment of the cockeyes when required.

An improvement in grooving irons has been patented by Mr. John W. Ammons, of Columbia, Mo. The object of this invention is to provide a plane iron which will chamfer off the outer corners of the groove simultaneously with the planing of the groove. It consists in a plate with beveled cutting edges combined with a grooving iron.

An improved swinging gate that is to be placed across a railroad track to keep cattle and other animals off, has been patented by Messrs. David A. Walker and John R. Smith, of Fort Benton, Montana Ter. It is to be opened by the contact of the pilot or cow catcher of the locomotive, and will close automatically immediately after the passage of the tram.

An improved combination tool, patented by Mr. Morgan H. Sly, of Shepardsville, Mich., combines several tools in one for the convenience of the mechanic, farmer, housekeeper, and others. It consists of a screwdriver, nail puller, wrench, nail hammer, wire cutter, riveting hammer, and pinchers combined in one tool.

An improved feed bag for horses, patented by Mr. Edwin Forbes, of Brooklyn, N. Y., has means for supporting feed bags in a convenient position for horses to eat from without interfering with the natural movements of the head. It consists in a spring arm adapted for connection upon the hames, with its outer end extending over the horse's head, and from which outer end the feed bag is suspended.

Mr. Patrick Gallagher, of Eureka, Nev., has patented an improved fire escape for attachment to buildings, which is so constructed that people can readily escape from the upper stories of burning buildings when the stairways may be rendered impassable by the fire.

Mr. Samuel H. Gregg, of Crawfordsville, Ind., has patented a fence panel formed of a long and short post, twisted wires, and hook-headed bolts, arranged and applied in a novel way to form an inexpensive yet substantial fence.

An improvement in vises has been patented by Mr Fortonato C. Zanetti, of Bryan, Texas. It consists in providing the clamping-jaws, which are secured to the lower end of the fixed jaws of the vise, with a spherical socket and adjusting-screw, to adapt the said jaws to embrace a ball on a standard attached to the bench, to form a ball-and-socket connection between the vise and bench.

Mr. Joseph Seiler, of Norwalk, Conn., has patented an improved device for connecting the mirror standards or supports with a bureau, in such a way that they can be easily attached and detached.

Mr. Charles F. Harvey, of Van Buren, Ark., has invented an improved attachment for the dashboard of wagons, and other vehicles drawn by horses, for holding the reins. It consists of an adjustable frame attached to the dashboard, supporting a horizontal bar, composed of two parts, the upper part being divided so that the reins can be slipped down between the two parts.

Mr. Samuel V. Kennedy, of New Haven, Conn., has patented a device for removing the metallic primer from an exploded cartridge shell, for applying a new primer, and for closing the shell tightly about the ball after it has been reloaded.

© 1879 SCIENTIFIC AMERICAN, INC

An improved implement for browning coffee, popping corn, and roasting peanuts has been patented by Mr. Stephen M. Poff, of Omaha, Neb. It consists in a pan made with a close top, having a hole in its top closed with a close cover having a perforated slide, three ribs or flanges upon the bottom, and a handle attached to the rear end.

An improvement in gates has been patented by Mr. Alonzo O. Dean, of Bethel, Vt. It consists in a gate post with an iron socket sunk into the ground and braced by extending arms; the gate is hung on rollers pivoted in a frame attached to the post, and provided with a ratchet bar which engages a toothed wheel connected with a helical spring. When the gate is opened the spring is wound up, and retracts when it closes the gate.

Mr. Philip W. Cassil, of New Athens, O., has patented an improved weather strip for doors. The invention consists in the combination with a main strip and the cap strip of bent straps engaging with hooks or staples, and serving to hinge the strip eccentrically to the door.

THE CLIMAX SAFETY HAMMERLESS GUN.

There can be very little doubt now that it is only a matter of time when the hammerless gun, or gun with internal

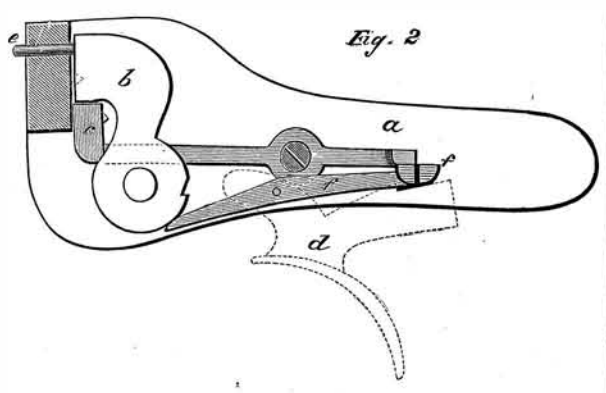

Fig. 2

hammers, will entirely, or almost entirely, supersede the ordinary gun with external hammers. The doubt with regard to hammerless guns has been whether they were as safe to use and as free from accidental discharge as the old style; and this doubt has had some foundation, for many of the hammerless guns are made with a locking bar which secures the triggers only, and allows the hammers to be jarred off and charge exploded when the locks have become worn or light in the pull off.

With the Climax hammerless gun such an accident appears absolutely impossible, for not only are the triggers bolted automatically, but, as may be seen by reference to the engraving, there is a strong block, *c*, which rises in the front of the hammers, *b*, as the gun is opened, which block interposes between the hammers and the strikers, *e*, and thus prevents any chance of the former reaching the striker, and thus exploding the cap. This block, *c*, is operated upon by the trigger, *d*, the pulling of which removes the block, and allows the gun to be fired. So that not only is the gun secure when the triggers are bolted, but even when the gun is placed at full cock ready for firing. No jar or fall can explode the gun, for should the locks be jarred down, the hammers would simply fall upon the safety block instead of upon the strikers.

Too much importance cannot be given to this principle of making a gun secure from accidental discharge when placed at full cock. Probably more than half the accidents that occur with guns occur through some blow or fall, causing the hammers to fall and thus fire the cartridge.

The principle of the Climax hammerless is also particularly well adapted for rifles of various kinds, there being no hammer to catch into anything when deer stalking or pushing through thick brushwood.

The breech fastening of this gun has not only the double grip bolt under the barrels, but also a very powerful grip formed by the top lever engaging a projection at the end of the rib. The lock is made upon the principle of an ordinary side lock, and is so arranged that the locks can be taken off like the locks of an ordinary gun. The rods which force the locks to full cock are completely under cover, so that there is no chance of water reaching the lock work. In this gun the jar given when firing heavy charges from one barrel cannot fire off the other barrel. This is an advantage which will be appreciated by sportsmen who have used large rifles with heavy charges. Fig. 1 in the engraving shows the exterior of the breech and the locks. Fig. 2 shows the internal construction of the lock, and Fig. 3 shows the hammer, *b*, cocked, and the safety block, *c*, in position.

These superb guns are manufactured by Messrs. Holland & Holland, 98 New Bond street, London, England, a description of whose fine workmanship we gave an account in a recent number of the SCIENTIFIC AMERICAN.

Fig 1

HOLLAND'S CLIMAX SAFETY HAMMERLESS GUN.

The Life of Railways and Rolling Stock.

The report of the Illinois Railroad Commissioners contains the following data concerning the average life of the rolling stock and superstructures of twenty-six roads: Locomotives, 15¼ years; passenger cars, 15¾ years; stock cars, 10 years; freight cars, 11½ years; iron rails, 7 years; steel rails, 14 years; oak ties, 7 years; pine ties, 4¾ years; cedar ties, 5½ years; truss bridges, 9½ years; trestle bridges, 8 years; pile bridges, 9 years; joints and fastenings, 7 years; fencing, 8½ years. One road gives the life of its locomotives as 8 years, and of passenger cars 15; another road reports the former at 24 years, and the latter at 20. Only one road puts the life of passenger cars as high as 20 years, and the lowest reported life rate of such cars is 8 years. The shortest life of iron rails is 3 years, and the longest 12; four roads report it as 10 years. Only four roads report the life of steel rails, and they give it as 9, 12, 15, and 20 years respectively. These data differ considerably from those of roads in other sections of the country.

Alizarin Blue.

G. Auerbach recently read a paper on this subject before the Chemical Society, London. He states: About eighteen months since a blue coloring matter was brought into the market as a substitute for indigo. It is now disused on account of its high price and its unstable nature when exposed to sunlight. The researches contained in this paper were finished in May, 1878. The author gives a résumé of previous work on the subject, and recommends the following method of preparation: 1 part of dry mono-nitro-alizarin, 5 parts concentrated sulphuric acid, and 1½ parts of glycerine (sp. gr. 1·262), are mixed and heated gently. Reaction commences at 107° C., becomes violent, the temperature rising to 200°. Much frothing takes place, with evolution of sulphurous acid and acrolein. The whole mass, when frothing has subsided, is poured into water, boiled up and filtered, the residue being boiled out three or four times with dilute sulphuric acid.

The mixed filtrates are allowed to cool, and the blue separates in brown crystals. These are purified by mixing with water and adding borax till the solution becomes brownish violet, the blue with the boric acid forming an insoluble compound. This residue is washed, decomposed with an acid, and the pure blue obtained as a violet silky paste. If required perfectly pure, it must be crystallized successively from its various solvents, high boiling naphtha, amylic alcohol, and glacial acetic acid. When pure it forms brown shining needles, melting 268-270°. It has the formula $C_{17}H_{11}NO_4$. Salts were prepared and analyzed, but the results were not satisfactory, as it was difficult to obtain them quite pure. Bromine derivatives were also prepared and examined. The action of chlorine, zinc dust, acetic anhydride, etc., have also been studied. The author discusses the constitution of the blue, and thinks it must be closely related to the aldehydines discovered by Ladenburg, which are formed when aromatic orthodiamides act upon aldehyds.

Ammonia on Brass.

John Y. McLellan, of Glasgow, writes to the *Chemical News* as follows:

While experimenting on the action of liquor ammonia on various metals and alloys, with a view to determine the most suitable for the contraction of a certain part in an ammonia plant, I have met with a reaction on brass which, so far as I know, has not before been recorded and of which this note is a preliminary notice. If a small piece of brass or a few brass turnings be covered with liquor ammonia, sp. gr. 0·889, in a closely fitting stoppered bottle, and placed aside for a few days, it will be found that the ammonia has acted on the copper of the brass to such an extent as to produce a solution of a more or less characteristic violet color, due to the presence of oxide of copper held in solution by ammonia. If this solution be still allowed to remain undisturbed for a few days longer free from contact with the air, this violet color will gradually disappear, leaving a colorless solution, which, however, is no sooner brought into contact with the air by removing the stopper than the violet color is reproduced, and by again stopping the bottle and leaving it aside the same reaction occurs and may be reproduced over and over again.

The production of the violet color from a colorless solution on exposure to the air does not seem to be the result of oxidation, as on opening the bottle in an atmosphere of carbonic acid the same reaction takes place.

I am at present working up this subject in the hope of finding in what state this colorless solution of copper exists.

Household Perils.

Under this head the Boston *Journal of Chemistry* names several dangerous substances which find their way into households. There are two or three volatile liquids used in families which are particularly dangerous, and must be employed, if at all, with special care. Benzine, ether, and strong ammonia constitute this class of agents. The two first named liquids are employed in cleansing gloves and other wearing apparel, and in removing oil stains from carpets, curtains, etc. The liquids are highly volatile, and flash into vapor so soon as the cork of the vial containing them is removed. Their vapors are very combustible, and will inflame at long distances from ignited candles or gas flames, and consequently they should never be used in the evening when the house is lighted. Explosions of a very dangerous nature will occur if the vapor of these liquids is permitted to escape into room in considerable quantity. In view of the great hazard of handling these liquids, cautious housekeepers will not allow

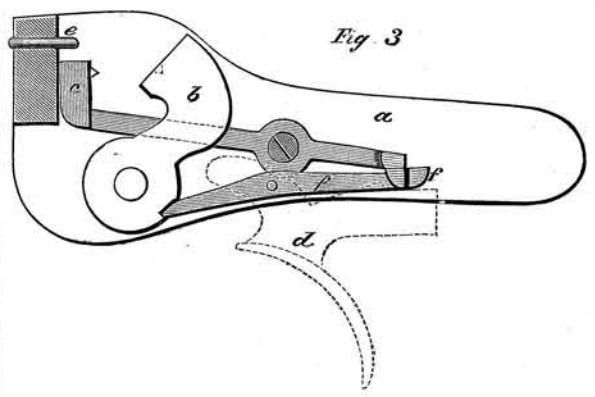

Fig. 3

them to be brought into their dwellings, and this course is commendable.

As regards ammonia, or water of ammonia, it is a very powerful agent, especially the stronger kinds sold by druggists. An accident in its use has recently come under our notice, in which a young lady lost her life from taking a few drops through mistake. Breathing the gas under certain circumstances causes serious harm to the lungs and membranes of the mouth and nose. It is an agent much used at the present time for cleansing purposes, and it is unobjectionable if proper care is used in its employment. The vials holding it should be kept apart from others containing medicines, etc., and rubber stoppers to the vials should be used.

Oxalic acid is considerably employed in families for cleaning brass and copper utensils. This substance is highly poisonous, and must be kept and used with great caution. In crystalline structure it closely resembles sulphate of magnesia or Epsom salts, and therefore frequent mistakes are made and lives lost. Every agent which goes into families among inexperienced persons should be kept in a safe place, and labeled properly and used with care.

Congress of American Potters.

The sixth annual convention of the Potters' Association of the United States began in Cincinnati, Ohio, December 2. About a hundred manufacturers were present, representing all the prominent centers of the industry. The secretary reported that the past year had been an eventful one in the history of the ceramic art in this country. Never before had more rapid advances been made in any department of industry. Additions and improvements have been made to nearly every pottery in the United States. Several new ones have been built, and others are soon to be erected. Each manufacturer has seemed determined to succeed, and, bending all his energies to that end, the result has been a success far surpassing the most sanguine anticipations. With increased knowledge has come increased power, and the result may be seen in the quality and beauty of our productions, which are rapidly taking rank with the best products of other lands, and the old prejudice against American ware is now nearly a thing of the past. Especially in the decorative department has the improvement been marked. The demand for this class of goods has rapidly increased, and American artists have succeeded in producing results never before accomplished in this country. Some of the lady artists of Cincinnati are fast gaining a national reputation for their beautiful work. We need in this country more art schools. The success of our industrial and commercial interests depends largely upon this. A cultivation of taste and a love of art would create a demand for wares of higher artistic order, and thus build up an industry which might in time rival the most beautiful productions of Europe. This holds good not only in the ceramic, but every department of industrial art.

FIVE SUNDAYS IN FEBRUARY.—It is interesting to note that in February next there will be five Sundays. This occurs but three times in a century.

© 1879 SCIENTIFIC AMERICAN, INC

AGRICULTURAL INVENTIONS.

Mr. Reuben Graves, of Hope Town (Lostant P. O.), La Salle County, Ill., has invented an improved jointer for plows, which is so constructed that it may be adjusted to throw its furrow slice forward or sidewise or rearward. It may be leveled however its standard may be attached to the plow beam, and it may be adjusted to cut its furrow slice loose from the ground.

An improvement in grain planters has been patented by Mr. John W. Rykard, of Abbeville, S. C. The object of this invention is to furnish a simple, inexpensive, and effective seed planter or dropper for attachment to a plow, to be operated by the plowman.

Mr. William W. Sauls, of Denison, Texas, has patented an improvement in cotton choppers, which consists in combining a chopper with mechanism for operating it, and a brake and hand lever. In order that this machine may work properly it is necessary that the seed should be planted or drilled in a straight line. To insure this the inventor has constructed a planting attachment for the machine.

BOAT-LOWERING AND DETACHING APPARATUS.

The engraving represents an automatic brake for tackle used in lowering ships' boats, and for other purposes requiring a self-acting brake for controlling running ropes. The engraving shows the apparatus in perspective in Fig. 1 and in section in Fig. 2. The brake is operated by the strain of the rope to which it is applied.

The curved lever, A, is pivoted on the pin, B, in a frame resembling that of a pulley block. A sheave, having one or more grooves, according to the number of ropes employed, is journaled in the lower part of the frame, and the curved lever carries a hexagonal roller. In the upper part of the frame there is a sheave of small diameter, over which the rope passes on its way out of the apparatus. The rope passes over the upper and lower sheave upon one side, and over the roller carried by the lever on the opposite side, so that any strain on the rope tends to move the lever so that its lower end acts as a brake on the rope passing over the lower sheave. The device is supported by the external stirrup, and the pressure of the lever upon the rope is lessened by pulling on the rope attached to its outer end.

The apparatus is the invention of Mr. William A. Brice, of Paris, France.

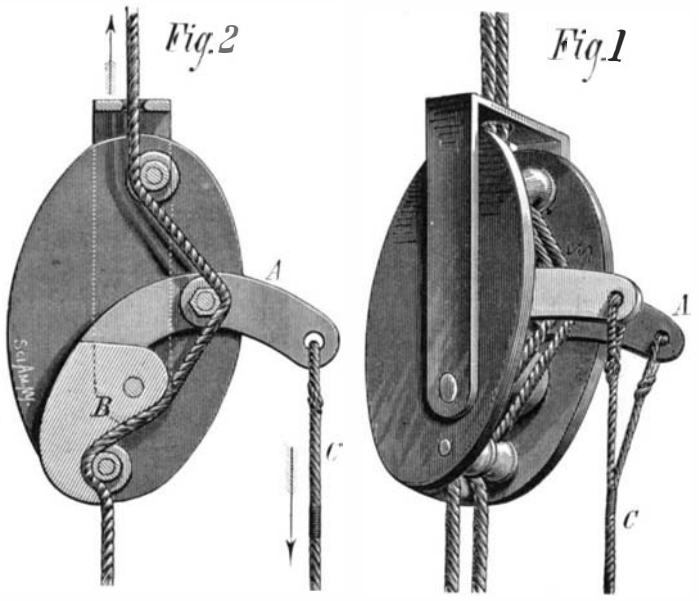

BRICE'S BOAT-LOWERING APPARATUS.

Steam on Pennsylvania Canals.

For several years efforts have been making to find an acceptable substitute for mules in hauling coal barges on the Pennsylvania canals. A new attempt will be made next spring. A steam canal boat is now in course of construction, to be put on the Lehigh and Delaware canal between Mauch Chunk and this city. The craft is to be entirely of iron, except the cross beams and deck. It will be eighty-eight feet in length, ten feet seven inches in breadth, and will be propelled by a ten-horse power steam engine with a screw wheel. It is said that, by a new invention to be applied to the screw, there will be but little agitation to the waters, and the washing out of the banks will consequently be avoided. The boat will have a carrying capacity of 105 tons of coal when drawing five feet of water. If it works satisfactorily a number of them will be constructed.

Tobacco.

BY T. B. SPALDING, M.D., OF TROY, ILL.*

In a recent essay before this society, I considered the action of alcohol within the human system, and on this occasion I am pleased to respond to your courteous invitation with observations on the action of tobacco. These agents might be profitably presented as almost identical in action, and shown to be largely accessory to each other's sins, but the *temperance* is waived for the *physiological* phase of the argument.

Of tobacco's origin, its introduction, its composition, its cost, the extent of its consumption, and the processes of its preparation, I purposely pass, to deal more directly with it in its physiological relations to the functions and forces of human life.

Eminent authority in every country and in every department of science, concur in classing tobacco among the narcotic poisons, than which none are more deadly; indeed, like Aaron's rod, it has secure within itself the most magical and worst of all its rivals. Nicotia, sulphureted hydrogen, hydrocyanic acid! What a den of deadliest poisons, all having their *habitat* in this colossal curse, termed tobacco!

A poison is declared to be "anything whose natural action is capable of producing a morbid, noxious, and dangerous effect upon the organization of anything endowed with life." Thus we perceive the definition is the perfect picture of tobacco's action. Acquainted with this agent for over two hundred years, medical science, speaking with the tongue of every science, declares tobacco wholly innutritious, and further still, declares it nauseous; not only that, but noxious; and further yet, a repository of deadliest poisons. From this dictum there is no appeal; in its truth medical men are forced, by their culture, to concur. But even then they dandle with Delilah till shorn of strength, and science must still be summoned and held aloft for the healing of the nation. If tobacco is a poison, it ought to act as such, and it may be safely affirmed it *has no other action!*—no other use in medicine, than to depress vitality. Thus it nauseates, it paralyzes the nerve centers, producing relaxation of the muscular system, and produces such dreadful prostration that medical literature is full of warning, and abounds with reported cases of fatal poisoning by this agent. When medical science was in her cradle, and chloroform in the embrace of chaos, ere anæsthetics had come, as the olive leaf dove, to the ark of Æsculapius, surgeons soothed their suffering patients with powerful potations of tobacco, and thus they utterly prostrated the vital powers, relaxed the muscular system, and then proceeded to reduce laxations! How direful must have been a patient's difficulty, if half so dreadful and distressing as the remedy.

It may be affirmed and demonstrated of tobacco, what is strikingly exceptional, namely, that it alone of all the vegetable kingdom possesses two active principles—the one an alkaloid, and the other oil, and both the deadliest of poisons.

It has been urged in support of fashionable poisons, that because multitudes use them, therefore they can't be especially dangerous; but professional science and experience teach that there isn't an agent in the entire armory of toxicology, but the human system, by continued use, may at length be brought to tolerate it.

One-fifth grain of strychnia, or one grain of morphia, will destroy life, yet, by constant and long continued use, the blunted susceptibilities of the nerve centers may be made so to tolerate these and like poisons that eventually enough may be taken to destroy fifty men. It is demonstrated in the observation of every one that the use of noxious agents, especially tobacco, begets a morbid appetite which demands that continually more of it *may* and *must* be employed to produce the same impression.

Such we know are facts respecting what is noxious, but is not the case with what is nutritious. Medical science is not satisfied with *statements*, but sounds the depths in search of a *philosophy* for asserted facts, and she declares, in this regard, that nutritious agents create and renew nerve cells and structures, and endow them with the finest physiological sensibilities, while noxious agents disturb the conditions essential to their renewal, and so benumb and paralyze their normal sensibilities, and produce inevitably the pathological and characteristic condition of requiring continually more of the disturbing poison to produce the same impression. With these truths we enter the most fascinating field in nature to consider the conduct of this agent in the laboratory of life. Nowhere has Deity evinced such evidences of an intelligent, divine supernatural as here presented in the adaptation of means to ends—in the perfect play of affinities and forces ever operative in the construction and destruction, the waste and renewal, of this physical citadel that enshrines an immortal soul. The whole sublime but sensitive train of transition involved in the conversion of solid food, first into fluidity, and under the auspices of vital force, transformed upward through intricate gradations till it attains the climax of its course in other solid forms, either of flesh or bone or brain, and then the oxidation of these and the evolution of heat and force, is the perfect process of what we term digestion. The brain is the depot of life's dynamics! It is the sun of the physiological system which, with its accessory centers and nerve cords, receive and transmit to the system a force that propels the mightiest and minutest processes of physical life.

But the ability of these organs—as instruments of the mind—thus to receive and transmit this vital force, depends essentially on their structural health and perfection. Paralyze or impair the perfection or structural integrity of the brain, disturb the subtile harmony of those changes of waste and renewal ever operative and essential to its structural perfection, and at once its power is impaired to forcibly and healthily perform its functions; and this adverse influence is precisely the action of tobacco as a depressing poison. The proposition is plain, the truth is self-evident and irresistible, that, with the nerve centers thus benumbed and blighted, and the vital force impaired, then every digestive process dependent on the harmonious action of vital force is weakened and discordant, and the physical and mental man is deranged to the extent that the physical machinery is injured.

The noxious influence of tobacco is more actively operative upon one class of persons than upon others. I may, therefore, for convenience, divide the victims of tobacco into two classes, assigning to the first class all those who do manual labor. These suffer least from fashionable poisons, because the deadening influence of noxious agents upon the nervous system is largely counteracted by physical toil, which strengthens the entire system and conduces to health; and thus it is that active poisons are thought to "kill slowly," and laboring people live long, apparently uninjured, and practice poisonous indulgences. In all this great and glorious class of humanity, however, may be found the fruits of tobacco's use, in the form of cancer on the lips and tongue, dyspepsia, constipation, and hemorrhoids. But let us consider the other class, wherein are included ladies and gentlemen of wealth, of fashion, and of leisure, those who live idle as well as those devoted to literary pursuits and purely sedentary occupations. Physicians, ministers, and lawyers are of this class, and in all these we find paralysis very prevalent, and that diversified and interminable train of nervous derangements whose name is legion. With constitutions enfeebled by physical inactivity and sensibilities heightened by social and literary culture, consider for a moment the effect upon these highly nervous natures. To all of this priceless portion of humanity the use of tobacco is unmixed evil and rapidly ruinous.

Again, it is affirmed by eminent authority that tobacco is the most prolific, if not, indeed, the only source of delirium tremens.

First, the ancients were entirely unacquainted with these terrible terrors of the inebriate, and the records beyond the discovery of tobacco (1560) reveal no case of *mania a potu*.

Second, the normal action of tobacco is the production of tremens, and the most frightful forms of delirium tremens are daily produced by the use of tobacco alone.

Third, it is rarely possible to find an inebriate who does not use also tobacco, and careful inquiry will confirm the statement that, with 90 per cent of such cases, the tobacco habit was first formed. Its influence deranged the nerve centers, an initial tremens was entailed upon the nervous system, which suggested to the morbid taste of the sufferer the soothing, sedative action of alcohol, and thus the allied agents forge for each other and fasten more firmly the chains of the servilest slavery.

I have employed professional science to loosen the pillars of tobacco's position, and with authority and with argument have carefully criticised its action and influence on the functions and forces of organic life. Earnestly in this direction I invoke the sober judgment of scientific medicine, and when you shall have ordered tobacco to abdicate, then only will it fall from popular use and favor, and with that will end the ruin it has wrought.

In view of these truths, scientific and self-evident, in the name of science that classifies all knowledge, in the name of science that seeks the essential nature of things, in the name of science that truthfully interprets the teachings of nature, issue the edict of your eminent authority and drive from popular use and favor this poisonous plague, and when this is secured a heavenly halo of light, an ineffable effulgence, will open up over the poisonous wastes of the world a broad and bright and beautiful pathway of crimson and of gold, wherein garlanded angels will gladly gather, proclaiming "peace on earth and good will toward men," and from highest heaven all over the earth shall you cause to be heralded God's emancipation proclamation to a world that is wasting its highest and holiest possibilities in the ruinous, depressing practice of popularized poisons.

*An address before the Madison County Medical Society.

Fish Killed by Electricity.

A correspondent of *Land and Water* says: A curious incident of the whole of the occupants of a small fish pond being destroyed by a flash of lightning, is reported from Seck, Grand Duchy of Nassau. The *Nassauer Bote* states that during a very heavy thunder and hail storm at night time, a flash of lightning struck a small pond, well stocked with various kinds of fish, the property of the pastor of the parish. The following morning the whole of the fish were discovered dead upon the surface of the water. They had all the appearance of having been half boiled, and crumbled to pieces at the least touch, just as is the case with fish after being boiled. Neither any external nor internal injury could be observed, the scales being intact and the swimming bladder filled and well preserved. The water in the pond was still muddy and dull the morning after the storm, as if the lightning had only then struck it.

Our Chief Cities Eighty-five Years Ago.

The South Carolina and Georgia Almanac for 1794, a copy of which has fallen into the hands of the Charleston, (S. C.) *News*, contains a table in which the populations of the chief cities of the United States are set down as follows: Philadelphia, 42,520; New York, 30,000; Charleston, 20,000; Boston, 18,000; Baltimore, 13,503: Newport, 6,000. At that time the entire population of the country was less than 4,000,000.

© 1879 SCIENTIFIC AMERICAN, INC

AMERICAN INDUSTRIES.—No. 27.

THE MANUFACTURE OF LEATHER.

The industry which forms the subject of this article is of very ancient origin, and it is doubtful if there exists to-day a line of manufacture whose processes have suffered so little change in the course of time as that of leather making. It cannot be said that the leather of to-day is superior to that of a hundred years ago· it is true the processes have been improved, so that less time is required than formerly, but there is no radical change in the materials or methods of leather making. The machinery used in handling hides during the process of tanning, and the methods and machinery for treating the hides after they become leather, have been greatly improved, so that the manufacture of leather is now conducted in accordance with the spirit of the times.

The leather interest is one of the most important of our day, employing a greater number of hands than any other mechanical industry excepting carpentry and other wood working. The yearly product of the combined leather interest exceeds three hundred millions of dollars ($300,000,000). Agriculture and the railroad interests alone surpass the leather interest in values created and involved.

It is not the purpose of this article to trace the history of leather making, nor to give all of the details of its manufacture, but to briefly describe one of the oldest, largest, and most successful leather manufactories in the country. We refer to the establishment of Messrs. T. P. Howell & Co., of Newark, N. J., whose works we illustrate on our title page.

This house dates its existence from the time when Newark, now a city of 130,000 inhabitants, was but a village of 8,000 inhabitants, and New York city was no larger than Newark is at present. The establishment was then small, and engaged principally in the manufacture of patent leather, then a comparatively new article in this country. In 1848 the buildings of S. M. & T. P. Howell having been destroyed by fire, new ones were built on the site of the present works, and in 1855 the style of the firm was changed to T. P. Howell & Co. Since that date new buildings and improved machinery have been added as required, until the establishment ranks as one of the largest and best appointed in this country, and in the production of patent and enameled leather it is the largest in the world.

The buildings of the Newark tannery cover about four acres, and there is a tannery in Middletown, N. Y., owned by the same firm and doing the same kind of business.

In this establishment none but the choicest hides are used, of which they have a regular daily supply, received by special train, and transferred to the hide house shown in one of the upper views in the engraving, where the horns and tails are removed, and they are trimmed and otherwise prepared for future operations. In preparing a hide for tanning, the first operation is that of soaking in water. For this purpose they are placed in large numbers in pools; from the pools they are taken to the beams, where fatty substances are removed; they are then placed in vats containing a lime solution and allowed to remain for a week. The lime dissolves the hair sheath and combines with the fat of the hide to form an insoluble soap. When the hair and the epidermis yields to the touch the skins are taken out and scraped on the beams, with a curved two-handled scraper called the unhairing knife. After the removal of the hair the flesh is removed by means of a knife similar to the unhairing knife.

After these operations, and before subjecting the hide to the tanning process, the lime as well as dirt and animal impurities must be removed. This is accomplished by first submitting the hide to a process called bating, and then working out the bate by means of washing and by the use of a sort of burnishing tool or rubber that is brought to bear upon the hide as it is laid over a beam. The washing is accomplished by beating the hides in a machine resembling a fulling mill, and tumbling them in huge wooden cylinders supplied with a stream of water. When the hides are removed from these cylinders they appear very clean and white; they are now ready for the process of tanning, and are conveyed to the tan vats, where they are immersed in a strong liquor prepared from the bark of oak and hemlock. Here the hides remain, with the exception of short intervals of handling, for a period varying with the purpose for which the leather is intended—from two weeks to two months.

To hasten the process the liquor in some of the vats is constantly agitated by large paddle wheels, seen in one of the middle views, which not only revolve the liquor but the hides also. After the tanning is completed the hide is transferred to the curriers, who shave it on the rough flesh side, reducing it in thickness, removing irregularities, and making the rough side smooth and even. The skin during this process is supported on a beam, the workman preventing the skin from slipping by pressing his body against the portion hanging over the end of the beam. The knife used for this purpose is wide and straight, having at one end a T-shaped handle, and at the other a straight one. It has a peculiar wire edge, kept in order by a burnisher. After shaving, the skins are thrown into fresh liquor, retanned, and then scoured. For this purpose they are placed upon large tables and worked with a tool called a slicker. The department in which this work is carried on is shown in one of the middle views, and the "slicker" is represented in detail in the upper portion of the view.

The leather made in this establishment is split into three parts. The grain side is enameled in various colors, and is used for carriage tops and upholstering. The middle is japanned for carriage and harness use, and the flesh side is used in shoe manufacture and for other purposes.

The portion of the skin which is japanned is stretched on a wooden frame, and after receiving a black groundwork—which is allowed to dry—a coating of japan varnish is applied and baked on. Patent leather is made in different colors for different purposes, and although this particular article is a specialty with this house, we are informed that with the exception of sole leather, there is nothing in the line of leather that is not made here.

It is gratifying to add that the vast product of this immense concern is not only used in the Uuited States and Canada, but is also shipped to all parts of the world. The firm commands a very large trade in England and her Colonies, South America, and all the principal foreign countries. They are as well acquainted with the demands of the foreign markets as with the requirements of their home trade.

Messrs. T. P. Howell & Co.'s New York house is located at 77 Beekman street.

MECHANICAL INVENTIONS.

A machine for hot-pressing cloth, in which the cloth is made to pass between a hollow press box heated by steam and an adjacent pressing cylinder, has been patented by Mr. Ernst Gessner, of Aue, Saxony, Germany. The improvement consists in the combination, with two or more cylinders and corresponding press boxes arranged to give a repeated pressure upon one side, or successive pressures upon opposite sides of the cloth, of a carrier belt, roller, or equivalent device, adapted to receive the cloth from one press box and prolong its travel in its passage to the next press box, whereby a sufficient time is allowed for the goods to become cooled before receiving the second hot-pressing.

An improved steam generator, patented by Mr. Dan Abell, of Carson City, Nev., consists in combining with a steam generator feed water pipes extending through the flues and projecting through an opening at the front and a cap for covering the ends.

Mr. Rosseel Payne, of Ox Bow, N. Y., has patented a plow that will remove the snow from a railroad track and deposit it either to the right or left of the track, as may be desired, by means of a wheel with cutters revolving in the vertical plane and attached to the forward end of a platform car.

Our Increasing Export Trade.

The following table from the annual report of the Chief of the Bureau of Statistics shows the greatly increased values of the exports of our principal domestic productions during the fiscal year 1879, as compared with the exports of the same articles during 1868 and 1878. It should be remembered that the increase in the value of the exports has been attended by a considerable fall in the market price of certain of the articles named in the table:

Commodities.	Value exported, 1868.	Value exported, 1878.	Value exported, 1879.
Agricultural impl'mnts..	$673,381	$2,575,198	$2,933,388
Animals, living.....	733,395	5,844,653	11,487,754
Bread and breadstuffs..	69,024,059	181,777,841	210,355,528
Coal	1,516,220	2,359,467	2,319,398
Copper and brass, and m'n'f's of, not including copper ore.....	496,329	2,909,357	3,031,924
Cotton, m'n'f's of....	4,871,054	11,438,660	10,853,950
Fruits of all kinds	406,512	1,378,106	1,916,382
Iron and steel and m'n'f's of, exclusive of firearms, but including scales and balances, sewing machines, and fire engin's	5,491,306	13,784,007	12,766,294
Leather of all kinds	607,105	7,093,020	6,800,070
Mineral oil (illuminat'g)	19,752,143	41,513,676	35,999,862
Provisions	30,436,642	123,556,323	116,858,650
Sugar, refined.....	313,378	4,508,148	6,164,024
Tallow.....	2,540,227	6,695,377	6,934,940
Total.....	$136,861,751	$405,433,828	$428,422,164

The total value of domestic exports during 1879 was $698,340,790, making a balance of trade in our favor of over $269,000,000.

The Ebb of the Chinese.

The Chinese in California have begun to go. The steamer that sailed from San Francisco for Hong Kong on the 15th, took 901 of them to their native land. The port statistics of San Francisco show that the arrivals of Chinese during the year ending November 1, were 6,128, and departures 8,746—of whom 6,229 went to China, and 2,517 to Honolulu—the excess of departures over arrivals being 2,618. It is estimated that there are 62,000 Chinese on the Pacific coast, which shows that this population is decreasing instead of increasing, for when the anti-Chinese agitation was begun, a few years ago, the estimate was 100,000. The total number of Chinese arrivals for the twenty years ending December, 1878, was 230,430, and the departures and deaths 133,491. At this rate the Chinese cheap labor will soon be unknown in California.

Trade Marks.

The Committees of Congress have lately reported in favor of an amendment to the Constitution providing for the legalization of trade mark registrations, and it is expected that the necessary bill will be promptly passed by the required majority—two-thirds in each branch. The constitutional amendment will then be submitted to the consideration of the legislatures of the thirty-eight States, and when adopted by three-fourths of the States, the new provision will form a part of the organic law of the republic. Thereafter Congress will have power to make a general law for the registration of trade marks.

A Proposed New Trade Mark Law.

To the Editor of the Scientific American:

I believe it is admitted that the failure of the trade mark law to give protection is a misfortune to the manufacturing interests of the country.

I suggest that Congress has a right to give incidental protection to trade marks under the power to levy and collect taxes.

Let the Bureau of Internal Revenue print and sell, to every manufacturer who desires it, an internal revenue stamp, bearing the trade mark of that manufacturer, the same as is now done to proprietors of patent medicines. The cost of these stamps should be merely nominal, but their forgery should be visited with all the penalties now inflicted for counterfeiting revenue stamps. Fines could be divided between the owner of the trade mark and the United States, or otherwise, as found best.

This imposition of a tax would be uniform throughout the United States, and therefore conforming to the requirements of the Constitution, but the payment would be optional with those who desired its protection. Such protection could be made almost absolute under the revenue laws.

I would like this idea, which I have here crudely outlined, to be criticised by your readers.

W. A. BARTLETT.

Washington, December, 1879.

The Inspection of Steam Vessels.

In his annual report the Supervising Inspector-General of steam vessels makes the encouraging statement that notwithstanding an increase of 400 vessels to the steam merchant marine of the United States since 1875, and notwithstanding the largely increased passenger capacity of the steamers built since then, there has been a steady falling off in the number of fatal casualties. These were, during the past five years, as follows; 607 in 1875, 398 in 1876, 224 in 1877, 212 in 1878, and 177 in 1879.

Attention is called to the necessity of legislation in the matter of taxation for license fees for small steam pleasure vessels or yachts, which, even though they may be no larger than a common sloop's yawlboat, are compelled to pay the same fees for license as commercial vessels of 100 tons burden, which excessive tax has in many cases actually prohibited their use, as many persons desirous of owning such vessels for their own pleasure feel unwilling to pay a fee of $25 yearly for inspection. In this connection Mr. Dumont says:

While I think it would be improper to exempt such vessels from the general requirements of the steamboat laws, however small they may be or however employed on waters open to competitive navigation, both for their own safety and for other vessels governed by said laws, I think that a fee of $5 for the inspection of such vessels, say of twenty tons burden or under, would be ample, and would encourage the building of many more than are now used, thereby benefiting one of the great industrial interests of the country.

Osage Orange Timber for Railroad Ties.

A correspondent sends a transverse section of Osage orange wood cut from a stick which, to his certain knowledge, had been lying for twelve years partly covered with earth in an old meadow. The heart wood is in perfect preservation. This timber, he says, is a rapid grower, and seems to be nearly imperishable in the ground; and he suggests that it would pay railroad companies to cultivate it for ties. Osage timber large enough for narrow gauge roads would grow, he thinks, in from twelve to fifteen years from planting. Whether it would hold spikes well does not appear

Uranium in California.

A dispatch from Fairplay reports the discovery of uranium in the Sacramento mining district. This mineral is found in Bohemia, but never before has been discovered in this country as far as known. The present discovery was made by H. L. Rice. The ore runs 60 per cent. Uranium is worth $1,000 per ton. One of its principal uses is as a coloring substance in the manufacture of glass.

Chemical Nomenclature.

The reports of the *Berliner Chemische Gesellschaft* of October 13, 1879, contains a note on the production of tetramethyldiamidodiphenylmethan and naphthyldimethylamidophenylsulphon. If the latter is heated with nitric acid pentanitrodimethylanilin and nitronaphthalinsulphite are produced.

Ifthissortofthingiskeptup chemistry willsoonberesolvedintooneword.

Extending its Use.

The flexible shaft, which so much resembles a snake, and which is used for operating drills and other instruments used in dental offices for operations on the teeth, has proved to be capable of doing heavy work, such as the boring of wood and iron. It is used also in the brushing of horses and cattle, cleaning and polishing plate glass, finishing morocco leather, and in boot cleaning. As described by a machinist, it "leads mechanical power into the more intricate ways and remote corners heretofore only approachable by the human arm, and it is apparent that manifold applications of the flexible shaft will be made in the future that are not now thought of."

© 1879 SCIENTIFIC AMERICAN, INC

The Solano—The Largest Ferryboat in the World.

The projection of this great ferryboat for the transportation of passengers and freight across the Straits of Carquinez, from Port Costa to Benicia, California, was noticed in this paper some months ago. Now that it is completed and afloat California may boast of the biggest ferryboat in the world. The dimensions of the Solano are:

Length over all, 424 feet; length on bottom—she has no keel—406 feet; height of sides in center, 18 feet 5 inches; height of sides at each end, from bottom of boat, 15 feet 10 inches; moulded beam, 64 feet; extreme width over guards, 116 feet; width of guards at center of boat, 25 feet 6 inches; reverse shear of deck, 2½ feet. She has two vertical beam engines of 60 inch bore and 11 inch stroke, built at Wilmington, Del. The engines have a nominal horse power of 1,500 horses each, but are capable of being worked up to 2,000 horse power each. Upon the deck of the Solano are four tracks extending her entire length, with a capacity for carrying forty-eight loaded freight cars, or twenty-four passenger-coaches of the largest class. The rudders are worked by hydraulic steering gear, operated by an independent steam pump. These rudders are connected with the ordinary steering gear, so that in case of any disarrangement of the hydraulic apparatus the vessel may be guided by it. The advantage of this improvement is that the immense craft can be handled with ease by one man, whereas, if the ordinary wheel and system of steering were used, six men would be required at the wheel.

Lake Erie Vineyards.

The islands at the western end of Lake Erie and the neighboring shores of Sandusky Bay are largely devoted to the production of grapes and wine. The Sandusky *Register's* annual report, just published, for 1879, shows that there are in this district 4,000 acres planted with vines, the yield for the year being in round numbers 16,000,000 pounds of grapes. The wine houses report a production of 1,526,400 gallons. Of this by far the greater part is Catawba, which holds its own as the favorite American wine in spite of the efforts to popularize native red wines made from the Concord grape, the Ives seedling, and other varieties.

The *Register* estimates that not more than one million gallons of pure juice has gone with the million and a half gallons of wine. Some of the dealers, it says, make no secret of the fact that they use spirits, sugar, and water largely, and claim that this doctored stuff is more acceptable to their customers than pure wine.

NEW CAR STEP.

The annexed engraving shows an improved folding step applied to passenger cars to facilitate the ascent and descent of passengers from the platform,

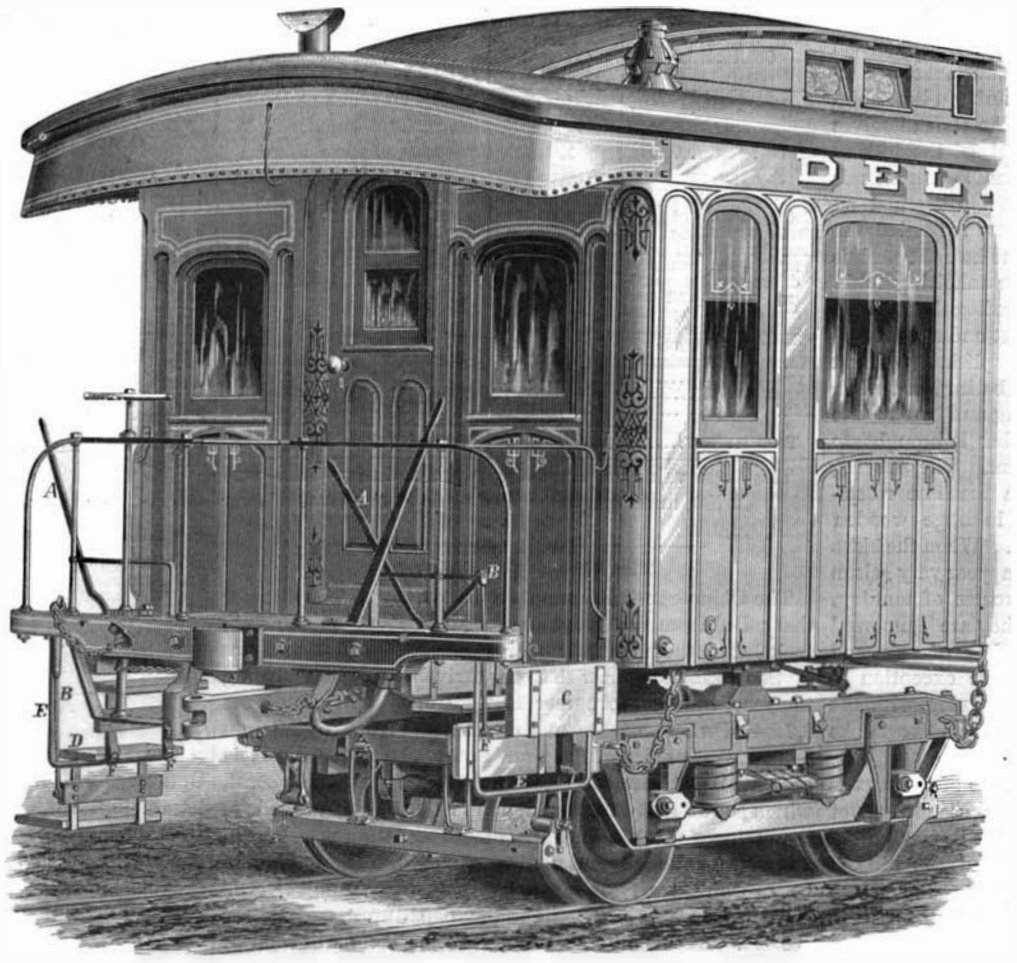

IMPROVED CAR STEP.

and to avoid climbing and jumping in getting on and off the cars. The folding step is connected with the lower car step, and when in position for use it is supported, when let down, by a yoke that passes under the fixed step.

The folding step comes within a foot of the ground, and permits of making the risers of all of the steps shorter, and the steps are of course much easier than the ordinary ones. When the train is ready to start the steps are turned up out of the way by means of a lever, which also holds them. In this position the steps cannot be injured or broken off by obstructions on the road or by snow or ice in the winter. Another important feature is that the step when folded up forms an effectual barrier against jumping on or off the train while it is in motion, and prevents a class of accidents that have been alarmingly frequent. Another advantage is that the step may be let down at one end of the car only, thus compelling passengers to enter at that end, and admitting of a more thorough scrutiny of the passengers and a complete inspection of the tickets.

This invention has been thoroughly tested, and the steps are now in use by the Delaware and Hudson Canal Company.

Further information may be obtained by addressing M. E. Skerritt, No. 4 High street Albany, N. Y.

Ballasting for Railways.

With reference to "Roadmaster's Difficulties," a correspondent writes that there is no material for ballasting so good as the screenings of coal from mines or yards, either alone or mixed with some hard stone.

NEW STONE-DRESSING TOOL.

The dressing-tool shown in the accompanying engraving was recently patented by Mr. Louis C. Gilmore, of Shearman, Texas. Fig. 1 represents the upper side, and Fig. 2 the under side of the tool, showing the radial and angled grooves. The tool consists of a circular plate having in its upper surface a cavity or basin communicating with the grooves in its under surface by a central aperture. A handle is fixed to the upper surface of the tool at one side of the center. When the tool is in use the cavity in its upper surface is filled with sand or emery and water, and it is moved

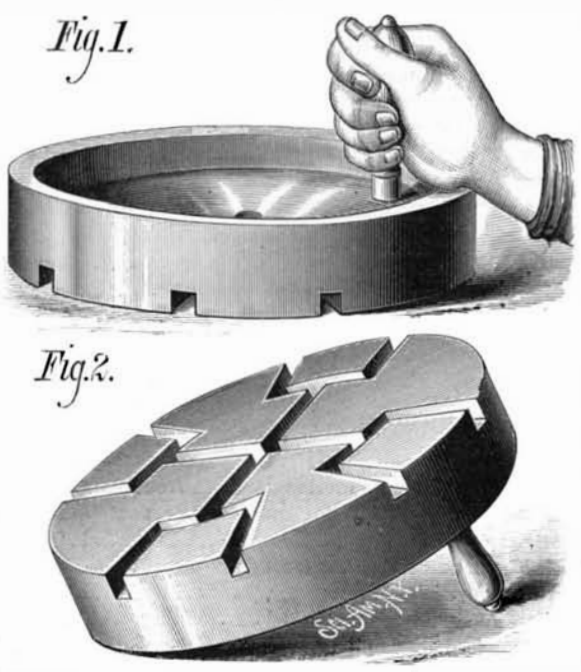

GILMORE'S STONE-DRESSING TOOL.

by the handle in an elliptical path, giving it a gyratory motion. This double motion of the tool greatly facilitates the operations of sand rubbing and polishing, and the grooves are of suitable form to distribute the abrasive material to the best advantage, and to retain it until it is used.

This tool is inexpensive, and may be used for the successive operations of sand rubbing, gritting or honing, and polishing.

Where the Cold Waves Come From.

Meteorological observations have now become so extended that evidence is rapidly accumulating to enable us to determine positively the source of the cold aerial waves which sweep across our country during the winter season. The indications are that we owe them to the great area of high barometer in Northeastern Siberia, where the pressure sometimes exceeds 31·50 inches, and the temperature falls as low as 76° below zero. The pole of greatest cold is in the neighborhood of Yokutsk, on the Lena, where the average thermometric reading in January is 41° below zero, and where the severest cold exceeds by ten degrees that experienced by explorers in high arctic regions. This is also the region of the highest barometric pressure known in winter; and from it, doubtless, proceed the waves of intense cold which play so large a part in our winter experiences.

The International Dairy Fair.

The second international dairy fair was opened in the American Institute building, December 8, with a fine display of dairy products, cattle, and machinery. The exhibits included butter, cheese, dairy cattle, implements and machinery for butter and cheese making, and agricultural designs and models for creameries, cheese factories, dairy buildings and farms.

In his opening address Mr. Francis B. Thurber gave the following facts and statistics collected by him during a recent visit to Europe:

The number of milch cows in Germany, as given by the latest statistics, is	8,961,221
In France	4,513,765
Great Britain and Ireland	3,708,766
Denmark	800,000
Sweden	1,356,576
Norway	741,574
Switzerland	592,463
While in the United States the latest statistics and estimates make the number of milch cows about	13,000,000

The quantity of butter and cheese per cow produced in the different countries varies so largely that no trustworthy average can be made, and the statistics, which embody only the quantities exported and imported, give but little idea of the total production. Some idea of the magnitude of the interest, however, may be formed from the fact that in this country alone, during the year 1878, three hundred and forty million pounds of cheese were produced, and nine hundred and sixty million pounds of butter. Of this but 3·9 per cent of the butter was exported, while of the cheese 41·6 was exported. Denmark, with but sixty million pounds total production of butter, exports thirty millions, or 50 per cent.

These export figures illustrate an important fact—namely that American dairymen have appreciated and catered to the tastes of cheese consumers in the great market of the world, Great Britain, while they have neglected to study the wants of the same consumers of butter. There is undoubtedly a difficulty in transporting butter long distances and delivering in perfect condition, but this is a difficulty which can be overcome, at least in a great degree. The great difficulty has been that so small a proportion of the immense production of butter in the United States has been of good quality, that really fine butter has commanded higher prices at home than abroad, and there is quite a sufficient quantity of poor butter to be found in most of the foreign markets.

Butter makers in other dairy countries have, however, made great progress in improving their product, and the average quality is much better than it was five, or even three years since. Improved dairy appliances and machinery, much of it of American origin, have been extensively introduced both on the Continent and in Great Britain; more attention has been paid to using the best salt; governmental dairy schools have been established in the continental dairy countries, even Russia having the enterprise to take this step, and scientifically educated dairymen are furnished by these schools to the principal dairy districts of their respective countries. Margarine butter, or oleomargarine as it is called here, has also assisted in bringing about this result, as it competed successfully with the poorer grades of ordinary butter, and obliged European butter makers to make an effort to produce a superior article.

In Great Britain, the amount of intelligent effort which is being directed toward the improvement of dairy products, especially butter, is surprising, and if American butter-makers would enlarge their foreign market, they must in the same manner strive to increase the supply of good butter which is produced, and thereby lower prices to a point which will enable us to compete in the principal butter markets in the world. That we have the ability to do this no one can doubt who knows the progressive spirit of the American people. Touching the scope for profitably enlarging the variety of cheese made in this country, Mr. Thurber remarked that a prominent English dairy authority has said that "cheese is made in the dairy," meaning thereby that almost any variety of cheese can be manufactured in countries other than those in which it originated. This has been proved by the successful manufacture in the United States and in France of the Gruyère, which, as we all know,

© 1879 SCIENTIFIC AMERICAN, INC

originated in Switzerland. It has also been proved by the successful manufacture in Russia of the English Cheddar and the Dutch Edam cheeses, and even the odorous Limburg confirms this assertion, for its manufacture has been so successfully domesticated in the United States by our German fellow-citizens that, as suggested by a member of the Paragraphers' Association, "the difference from the imported article cannot be told unless you are off to the windward three miles."

THE SEA SERPENT ACCOUNTED FOR.

BY DANIEL C. BEARD.

The New York Sunday *Sun* of November 30 gives the following description of the Sandy Hook monster, as related by eye witnesses, who are all members of a Sandy Hook life saving crew:

Samuel Kittell was the first to see it. He says: "I looked out and saw a large head and portions of the body of a most terrible looking monster. It was wriggling slowly along like a snake, the head and several portions of the body showing above the water. It was not a whale, as there was not more than twelve feet of water where it was, and a whale as large as that would necessarily have been in view all the time. But this thing would disappear altogether at intervals. No fin could be seen anywhere on the back. The body looked round and much larger than a pork barrel. It was of a blackish-brown color. I am sure it was not a whale, but cannot say what it was. It was a stranger to me."

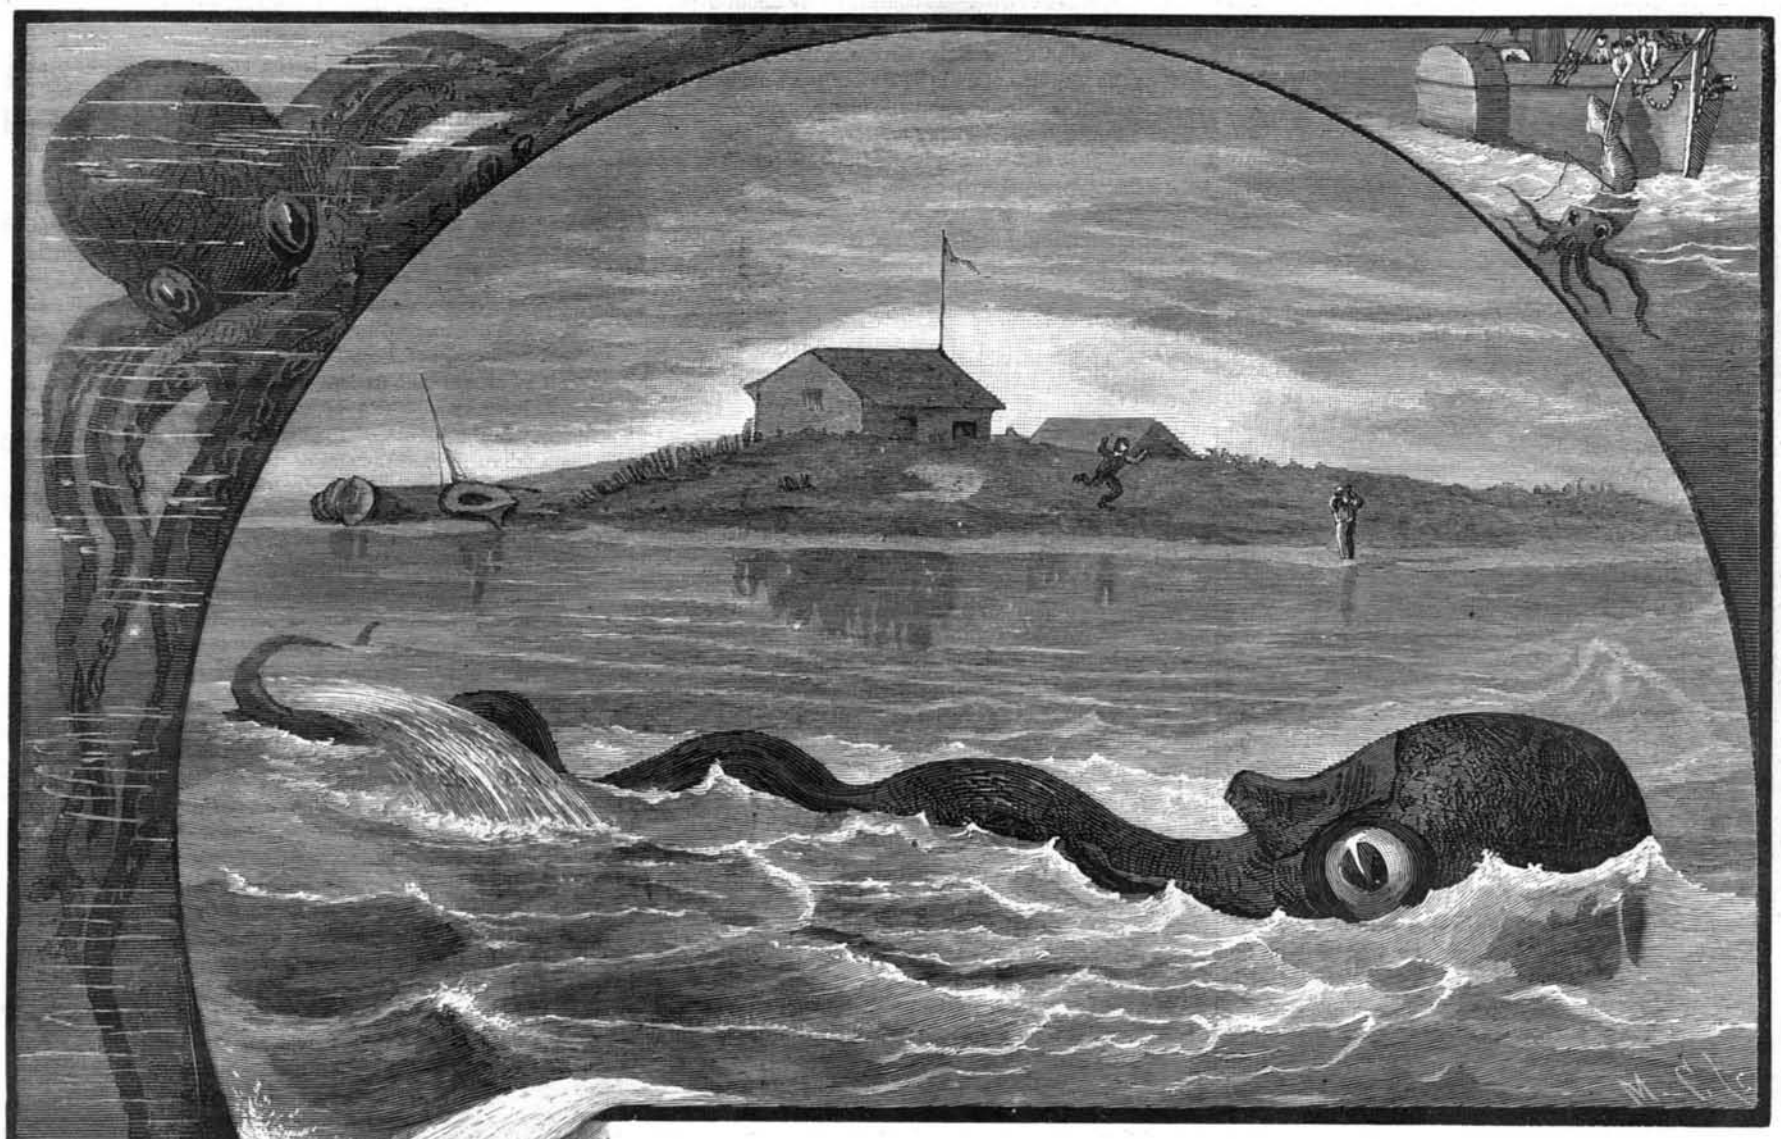

THE SANDY HOOK SEA SERPENT.

George Lohsen makes the following statement: "I took the glasses and ran down to the water's edge and leveled the glasses at the monster's head. The front of the head was square, with a projection about two feet long extending from the top of the head. The eye was seven or eight inches in diameter, of a shiny black, and it appeared bulged out considerable. There looked to be a white rim around it. The animal's length was at least 300 feet from the head to the tail, as seen by us, not making allowances for the crooks in the body."

Harry Foster, another of the crew, says: "I got up and looked out, and saw the devilishest looking fish I ever put my eyes on. It was moving along about as fast as a man could walk. I took a pair of strong glasses and followed it along the beach. It was not more than 300 yards from the shore. With the glasses the head looked as large as a hogshead. The front of the head looked square, and was about three feet high, with a projection two feet long extending from the top of its head. The eye toward the shore was as large as the top of my hat, was shiny black, and had a white edge. It had a very fierce look. . . . From the head to the tail it was at the least calculation 300 feet long. It was moving along the water the same as an eel. The head and several parts of the body were constantly out of the water. It was some species of serpent. It was certainly not a whale. . . . This thing did not spout, and showed no fins on any part of its body excepting on the tail, which was formed like that of an eel."

Well authenticated facts now prove that nature produces monsters as wonderful and startling as the most vivid imaginations of the romancer can invent. Victor Hugo's devil fish has its counterpart in the great cephalopod which was for a long time on exhibition in the New York Aquarium.

There is no doubt, in my mind, that the monster lately seen off Sandy Hook by the crew of the life-saving station was no other than a large cephalopod. That these animals often attain enormous dimensions is a well established fact, but that this one was "three hundred feet long" is scarcely probable.

One seen in the neighborhood of Van Diemen's Land is described as resembling a cask, its long arms having the appearance of snakes wriggling upon the surface of the water. This creature, says Kent, was probably a large poulpe or octopus. In December, 1861, the crew of the French corvette Alecton, engaged in battle with a calamary, whose body alone was estimated to be twenty feet in length, and its weight 4,000 pounds! It escaped, leaving a portion of its flabby body in the possession of the brave sailors, who were only restrained from following it in small boats by the officer in command. Captain Boyer.

October 26th, 1863, two fishermen noticed off Great Bell Island, Conception Bay, what they supposed to be a large bale of goods from some wreck. It was not until they actually struck it with a boat hook that they saw the terrible staring eyes of an immense poulpe; two of its numerous arms were thrown across the boat; one of the men severed these with a hatchet, the creature then moved off backwards. The amputated arms left in the boat were brought to St. Johns. The Rev. Mr. Harvey, who was the first to examine and describe these limbs, found that one fragment measured nineteen feet, although a large portion of it had been destroyed before it was rescued from the fishermen, and there is no way of determining how much more remained attached to the body of the animal.

Many other well authenticated instances could be enumerated to prove the immense growth of this family of marine monsters, but those given are sufficient to establish the fact that these "monarchs of the ocean," as Kent calls them, do exist, and that their main characteristics are as follows:

1st. The body is large and round, and described as resembling sometimes a cask, and again a bale of goods.

2d. The eyes are large and staring.

3d. The arms or tentacles are of great length, and have a snake-like appearance and motion.

On comparing these peculiarities with the descriptions of the Sandy Hook leviathan, as obtained through the enterprise of the *Sun* from eye witnesses, the similarities, even to the expressions used, will be apparent.

The fin, or what was supposed to be the serpent's tail, can be readily accounted for by the fact that in some species of the cephalopod the longest tentacle widens and flattens at the end, and might easily be mistaken for a caudal fin. When moving through the water these animals bring their many arms together in a line, thus affording the least possible resistance, and propel themselves by ejecting water from their siphons.

Imagine one of these horrible creatures, with its sac-like body half submerged in the shallow water, its large protruding eyes above the waves, swimming with its long snake-like arms or tentacles trailing far behind, and you have a very fair picture of the wonderful gigantic hydrophidian or marine serpent of which we have had such thrilling accounts.

A Singular Specimen.

Mr. E. L. Wood, of Eastland City, Texas, sends us a drawing and description of a curious bone, through which passes an iron ring, now on exhibition in a drug store in that town. It appears to be a shank bone, the iron band being so interlocked with it that to separate them one or the other would have to be cut or broken.

Mr. Wood says: "The side of the bone encircled by the band has a smooth appearance, while its opposite side is rough and serrated. The band is about 12 inches in circumference, 2 inches wide, 3/8 of an inch thick, and is beveled from its upper edge downward. At the square opening near where the bone is supposed to have joined the hoof, and extending upward several inches, is a porous formation, of the appearance and consistency of bone. Did the iron band pass through the foot and ankle, and is this linking together the result of ossification?"

The Last Number.

This issue closes another volume of this paper, and with it several thousand subscriptions will expire.

It being an inflexible rule of the publishers to stop sending the paper when the time is up for which subscriptions are prepaid, present subscribers will oblige us by remitting for a renewal without delay, and if they can induce one or more persons to join them in subscribing for the paper, they will largely increase our obligation.

By heeding the above request to renew immediately, it will save the removal of thousands of names from our subscription books, and insure a continuance of the paper without interruption.

© 1879 SCIENTIFIC AMERICAN, INC

New Tanning Materials.

We translate the following paper from the *Chemiker Zeitung:*

The number of the tanniferous matters introduced into trade has been of late decidedly increased. This result is due in part to the penetration of travelers into uncultivated lands, and partly to the fact that the old traditional astringents have become scarcer and dearer. The oldest known and formerly almost exclusively used wares, such as oak bark and sumac, are now insufficient for the demand, so that many substitutes have been found necessary, both in dyeing and tanning. These have almost exclusively been derived from foreign lands. Many were to be found at the Paris Exhibition of 1878, and have excited the attention of practical men. Some of them have since taken a place in the market, and others deserve to be brought into use. This induces us to make a brief mention of some kinds.

Species of Acacia.—These trees, natives of Australia and Africa, are known for their tanniferous bark, their pods, and their gum. The tanning barks known in commerce are nearly all derived from Australia, and are known as mimosa bark. Their percentage of tannin ranges from 15 to 32, but the kinds generally imported average 28 per cent, or two and a half times as much as good oak bark. The Australian kinds are: *Acacia harpophylla,* a very rich sort, from Queensland; *A. cunninghami,* the black wattle, from Queensland; *A. mollissima,* likewise known as black wattle; *A. retinoides,* from Victoria; *A. pycnantha,* or gold wattle; *A. subporosa,* from Victoria and New South Wales, one of the poorest sorts; *A. penninevis,* the hickory acacia, with about 20 per cent of tannin; *A. decurrens,* also called wattle tree; *A. melanolylon,* the black wood of Tasmania and New South Wales; *A. dealbata,* the silver wattle of Tasmania; and *A. leiophylla.* All these species are in use in Australia, and are imported into Europe, and especially into England, under the name of mimosa bark. Those preferred on account of their large proportion of tannin are: *A. harpophylla, mollissima, pycnantha, leiophylla,* and *cyanophylla,* the four latter of which average from 24 to 32 per cent.

The writer remarks that as no German merchant obtains these barks except *via* London, it may be important for German merchants to know that there is a nearer and more convenient source of these valuable barks in Algeria. [Not surely nearer than London?] In this French colony the Australian acacias, and especially the four last mentioned, have been cultivated for some years. The seed pods of the acacias, with the exception of *A. leiophylla,* are very rich in tannin. The production in Algeria is very trifling in comparison to that of Australia, but the plantings are being extended, and the trees grow quickly.

Algeria is a land very suitable for tanning materials; *Pistacia lentiscus* grows there in quantity, especially in the department of Oran. The rind is poor in tannin, but the leaves contain 12 to 15 per cent. This tannin has little color, and might be used by dyers in place of sumac. The leaves are oval, pointed, and are easily ground and extracted.

The rind of the cork tree (*Quercus suber*) is a rich Algerian tanning ware containing from 12 to 16 per cent of tannin. It forms in Algeria extensive woods, but the true bark is never stripped till the trees are too old to yield cork, when they are cut down. This applies also to the cork trees of Sardinia and Spain. The bark is chiefly sent to France, Italy, and England.

The evergreen oak (*Quercus ilex*) is being rooted out wholesale in Algeria to make room for the cultivation of wheat. The kermes oak (*Quercus coccifera*) is being treated in the same way. The root bark is very rich in tannin, and is extensively used for tanning in the south of France.

A bark which at the Paris Exhibition excited some attention by its high percentage of tannin is the suobar. It contains 24 per cent, is obtained from *Pinus halepensis,* and grows in Tunis. It occurs in pieces, which in form and color (?) resemble potsherds. It dyes a brown-green with iron mordants.

Besides the quebracho wood, South America furnishes four other important tan wares. The algarobilla of Chili is the pod of *Balsamo carpum brevifolium,* a tree which grows wild in rocky districts of Chili. The natives gather the fruit before it is perfectly ripe. When they are fully ripe the epidermis breaks easily, and the tannin, which forms a yellow, crumbly layer under it, is lost. The pods are nearly cylindrical, and resemble those of the locust tree. They contain 40 to 60 per cent of tannin, and a small quantity of a yellow coloring matter. The tannin is readily soluble in cold water. The present price is about £28 per ton, but the production does not exceed 200 to 300 tons. The harvest takes place in February. Valparaiso is the center of the trade. It is used in Europe, especially in North Germany, for tanning, and is preferred for uppers and harness leather, as it imparts a peculiar softness. Its importation is at present suspended owing to the war between Chili and Peru.

Chili furnishes two other tanning materials, one of them very important and the other capable of becoming so. The bark of *Persea linguy,* a tree belonging to the family of the Laurineæ, serves in South America, and especially in the Chilian province Valdivia, for tanning the so-called Valdivia leather, which is now imported in quantities. Some years ago attempts were made to introduce this interesting and useful bark into Europe, but unsuccessfully. Now it is imported by way of Hamburg, and has given very good results everywhere. The bark is red-brown, soft, and very porous, and can, therefore, be easily extracted with water. It contains 20 to 24 per cent of tannin, as well as a considerable quantity of a slimy matter, which is very important in tanning operations, as it promotes the swelling of the hides. There is also a small quantity of soft fatty matter of a peculiar odor. In the south of Chili there are inexhaustible forests of the *Persea linguy,* so that we may hope there may soon be found more importers of this useful bark, which by its rapid action in tanning, and by the weight of the leather produced, may assist the European tanners to withstand Chilian competition. While this bark is used for sole leather, the rind of *Laurus peumo* is used in Chili for tanning uppers. This latter bark has not yet been imported into Europe on the large scale.

Another Chilian bark is that recently imported under the name of Churco bark, *Oxalis gigantea.* In the first place this bark is not derived from any species of *Oxalis,* and an *Oxalis gigantea* does not exist. It is now known that this bark is obtained from the roots of a large species of fuchsia (*Fuchsia macrostemma*). The percentage of tannin is on the average 24 per cent, and the color of the watery extract is a dark brownish yellow.

Several other South American barks were to be seen at the Paris Exhibition, which were really worth importation, though they are at present neglected. We mention in the first place the Nancite bark, from *Malpighia punicifolia.* This bark, known also as Manquitta bark, contains from 20 to 30 per cent of a very light colored tannin, and comes from Nicaragua. The same region exhibited the Nacascolo bark, obtained, according to some, from Pernambuco wood (*Cæsalpinia echinata*), and according to others from the divi-divi tree (*Cæsalpinia coriaria*). It contains only about 3 per cent of tannin.

In Venezuela there are also several barks rich in tannin. That of the "roble colorado" (*Tecoma pentaphylla*) contains 27 per cent of tannin, accompanied by a considerable quantity of an orange-red coloring matter, which is also soluble in water. It is met with in large, thick pieces. The mangel bark (*Rhizophora mangel*) comes likewise from Venezuela, and contains, if obtained from young stems, 24 to 30 per cent of tannin, and much red-brown coloring matter. The old, thick bark is poorer in tannin. The cuspa bark, also from Venezuela, is poor in tannin. Peru yields the pods of a shrub, locally known as pay-pay (*Inga fenillei*). They are large, thick, and deep reddish brown, and contain 24 per cent of a tannin, which is almost colorless, and admirably adapted for the uses of the dyer. It deserves to be imported. —*Chemical Review.*

Health at Home.

At the recent Sanitary Congress at Croydon, England, the president, Dr. B. W. Richardson, F.R.S., gave an address on "Health at Home." That there was no place like home was a saying peculiarly appropriate to his subject, for the river of national health must rise from the homes of the nation. He would lay down a few golden rules for securing health at home. First he would put sunlight. Whether your home be large or small, give it light. In a dark and gloomy house one could never see the dirt that polluted it; unwholesome things got stowed away and forgotten, the air became impure, and soon some shade of ill health was engendered in those persons living in the house. Not only was the mind saddened in a home that was not flushed with light, but sunlight was of itself directly useful to health. The practice of placing sick people in dark and closely-curtained rooms was alike pernicious to body and spirit; and, moreover, he had found by experiment that certain organic poisons analogous to the poisons which propagate epidemic and contagious diseases were rendered innocuous by exposure to light.

He would next refer to the allied topic of night and hours of sleep. If it were good to make all possible use of sunlight, it was good equally to make as little use as possible of artificial light. Artificial lights, so far, had been sources of waste, not only of the material out of which they were made, but of the air on which they burned. In the air of the closed room the present commonly-used lamps, candles, and gaslights robbed the air of a part of its vital constituent, and supplied in return products really injurious to life. Gaslight was in this respect most hurtful, but the others were bad when long kept burning in one confined space. The fewer hours after dark that were spent in artificial light the better, and this suggested, of itself, that within reasonable limits the sooner we went to rest after dark the better It was of the greatest importance in a healthy home to let every person have a separate bed, and the clothes should be light and warm. As the bedroom was the room in which one-third at least of the whole life was passed, that ought to be the room on which most trouble after health should be bestowed. The rule followed was the reverse of this. The bedroom should be so planned that never less than 400 cubic feet of space should be given to each occupant, however good the ventilation might be. The walls should be colored with distemper or with paint, that, like the silicate paint, could be washed three or four times a year. The windows should have nothing more than a blind and a half muslin curtain. The floors should have carpets only round the beds, without valances from the beds. The furniture should be as simple and as scanty as was possible, the chairs free of all stuffings or covers that could hold dust. Of all things, again, the room should be kept clear of vestments not in use. From time to time a fire should be made in every bedroom, that a free current of atmospheric air might sweep through it from open doors and windows. Dry scrubbing was by far the best mode of cleansing the floor. An equal temperature of about 60° F. should be maintained, as far as possible, throughout the house, a free access of air, and, above all, dry.

His last rule he would take from the more strict of our Jewish fellow-subjects, that of a complete household-cleansing once a year; the cleansing of every article, great and small; of every wall and floor, door and lintel; and the removal and destruction of all organic refuse, however minute.

The Treatment of Diphtheria.

Dr. Thomas Gurney, senior physician to the City Dispensary, London, makes the following contribution to the *Lancet:*

"Since I have held the position of physician to the City Dispensary I have had considerably more than one thousand cases of disease of the throat under my care, many of which, both in public and private practice, have been cases of diphtheria. About this, by far the most serious disease of the throat, we have much to learn. The stiffness in the neck, the disturbance of the circulation, the rapid rise of temperature, before any affection of the throat is observed, all point to its being a blood poison calling for prompt and decisive treatment.

"The two questions that arise when called to a case of diphtheria, as, indeed, in all diseases, are: How does the disease tend to kill the patient? and, How does nature endeavor to rid herself of the disease?

"Diphtheria tends to kill by suffocation and by its poison exhausting the vital energy. Suffocation may be either accidental, or as a natural result of the throat affection—accidental if, when the membrane is thrown off, it becomes lodged in the larynx; natural if the swelling inside the throat shuts off the supply of air to the lungs. Nature will attain the mastery over her enemy if the strength be kept up and the deposits arrested. With these points to guide us we know that the arrest of the disease and nutritious support are our great aim. To succeed in this I have adopted a respirator made of the ordinary shape and size, the front being minutely perforated. Inside of the respirator I have two or three perforated plates inserted, between which I place common tow (not cotton wool); I then drop on each of the layers of tow ten to twenty drops of a solution of carbolic acid, creosote, and glycerine. Should the patient tire of these, I use turpentine or iodine. I place the respirator over the mouth, and keep it continually applied. My next idea is to provide the patient with warm moist air. To do this I have two kettles of water kept boiling on the fire; attached to the spouts of the kettles I have an elastic tube of an inch caliber, at the end of which is a spray-like nozzle, which I put immediately under the mouth of the patient. By this means I get my disinfectant remedies carried moist to the throat. As a sedative to the pain I know nothing so comfortable to the patient. Previous to this I take care to give an active purge, which usually removes offensive stools of effete, poisonous matter. Internally I give aconite in frequent small doses—two to four minims of the tincture; at the same time freely supporting the strength with milk, cream, and eggs, with or without brandy, and beef tea *ad libitum.* As a drink I recommend patients to take as much chlorate of potash in solution as they can without vomiting. I have found chlorate of potash highly beneficial in all cases of a low typhoid character. If this is objected to, I advise the juice of lemon to be taken—by many thought to be a specific for diphtheria. Should the system be very weak, I prescribe belladonna instead of aconite; but I find better results from the latter. As soon as the urgent symptoms have subsided I order strychnia, with or without nitro-hydrochloric acid—this not only being the best tonic, but also preventing the paralysis which so often follows diphtheria. I have found this treatment to be highly beneficial, but, knowing the tendency there is to rheumatism after this terrible disease, I never forget our friend the bicarbonate of potash."

Zymotic Contagion.

Professor Tyndall asserts that diseases are propagated not by effluvia or sewer gas, but by solid particles discharged into the atmosphere by currents of air or gas. This he proved by the following experiment: He cut up a piece of steak, steeped in water, heated it at a little above the temperature of the blood, then strained off the liquid; in a short time this fluid became turbid, and when examined through a microscope was found to be swarming with living organisms; by the application of heat these were killed, and when the solution was filtered he obtained a perfectly pure liquid, which, if kept free from particles of dust, would remain pure for an unlimited period; but if a fly were to dip its leg in fluid containing living organisms and then into the pure liquid, the whole would be swarming with animalcula in forty-eight hours.

Table Salt an Aperient.

Physicians have for a long time known that common table salt is an efficient aperient in ordinary cases of constipation. In a lecture on a case of nervous affection, Dr. Weir Mitchell, of Philadelphia, said that he had recommended the patient to take each morning on rising a tumblerful of water—cold, to prevent nauseating—in which was dissolved a teaspoonful of table salt.

'This simple aperient," the doctor adds, "I frequently employ in cases of constipation, and generally find it efficient. There is great advantage in starting the bowels and in keeping them in a soluble condition, particularly in cases of nervous disorder in women, as it sometimes clears up obscure points in the case, and at all events eliminates one source of error."

© 1879 SCIENTIFIC AMERICAN, INC

Business and Personal.

The Charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

☞ *The publishers of this paper guarantee to advertisers a circulation of not less than 50,000 copies every weekly issue.*

Fire on the Hearth.—Open grate and warm air furnace combined. Circulars by O.S.& V.Co.,78 Beekman St.,N.Y.

Toulmin's Ellipsograph.—Only instrument that will draw a true ellipse; adjustable to any size. Liberal cash discount. Davis & Watts, M'f'rs, Baltimore, Md.

A Rare Chance to Invest.—A complete outfit for either planing mill or furniture factory. Plenty of power, buildings, land, etc. Price $6,000. Inquire of E. Keeler & Co., Williamsport, Pa.

Direct Castings of Crucible Steel, of perfect integrity, solid, weldable, tough, strong, durable. Superior in quality to any made in America. Special facilities and skill in plow castings. Agricultural wrought steels and irons of every description. Read, McKee & Co., limited, Pittsburg, Pa.

Shafting, etc., a specialty. P. Pryibil, 467 W. 40th, N. Y

For Pat. Quadruple Screw Power Press, see adv., p. 405.

Telephones repaired; parts of same for sale. Send stamp for circulars. P O. Box 205, Jersey City, N. J.

Hub Mortisers; latest improved. Witherby, Rugg & Richardson, Worcester, Mass.

Hand Fire Engines, Lift and Force Pumps, for fire and all other purposes. Address Rumsey & Co., Seneca Falls, N Y., and 93 Liberty St., N. Y. city, U.S.A.

Machine Drawing Copies, 10 cents each. Descriptive list and catalogue of scientific books sent free by mail on application. E. & F. N. Spon, 446 Broome St., N. Y.

Hangers, Pulleys, etc. P. Pryibil, 467 W. 40th St., N. Y.

The Steam Pipes, Boilers, etc., in the buildings of the New York Tribune, New York Herald, and Harper & Brother, are protected with H. W Johns' Asbestos Boiler Coverings. H. W. Johns Manufacturing Co., 87 Maiden Lane, sole manufacturers of genuine Asbestos Liquid Paints, Roofing, etc.

Millstone Dressing Diamonds. Simple, effective, and durable. J. Dickinson, 64 Nassau St., New York.

Moulding Machine Wanted.—Manufacturers send full description, with price, to T. Reid, Brush Handle Manufacturer, W. Arlington, Vt.

Forges, for Hand or Power, for all kinds of work. Address Keystone Portable Forge Co., Phila., Pa.

Blake Crushers, all sizes, with all the best improvements, at less than half former prices. E. S. Blake & Co., Pittsburg, Pa.

The Friction Clutch Captain will start calender rolls for rubber, brass, or paper without shock; stop quick, and will save machinery from breaking. D. Frisbie & Co., New Haven, Conn.

You can get your engravings made by the Photo-Engraving Co. (Moss' process), 67 Park Place, N. Y., for about one-half the price charged for wood cuts. Send stamp for illustrated circular.

Presses, and Dies that cut 500,000 fruit can tops without sharpening. Ayar Machine Works, Salem, N. J.

For Sale.—One Horizontal Steam Engine, 20″ x 48″; one 18″ x 42″; one 16″ x 36″. Atlantic Steam Engine Works, Brooklyn, N. Y.

Empire Gum Core Packing is reliable; beware of imitations called Phœnix. Greene, Tweed & Co., N. Y.

The Baker Blower ventilates silver mines 2,000 feet deep. Wilbraham Bros., 2318 Frankford Ave., Phila., Pa.

Steam Excavators. J. Souther & Co., 12 P.O. Sq. Boston.

Park Benjamin's Expert Office, Box 1009, N. Y. Recipes and information on all industrial processes.

To stop leaks in boiler tubes, use Quinn's Patent Ferrules. Address S. M. Co., So. Newmarket, N. H.

Nickel Plating.—Sole manufacturers cast nickel anodes, pure nickel salts, importers Vienna lime, crocus, etc. Condit, Hanson & Van Winkle, Newark, N. J., and 92 and 94 Liberty St., New York.

Wright's Patent Steam Engine, with automatic cut-off. The best engine made. For prices, address William Wright, Manufacturer, Newburgh, N. Y.

For Solid Wrought Iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa., for lithograph, etc.

Presses, Dies, and Tools for working Sheet Metal, etc. Fruit & other can tools. Bliss & Williams, B'klyn, N. Y.

Hydraulic Presses and Jacks, new and second hand. Lathes and Machinery for Polishing and Buffing Metals. E. Lyon & Co., 470 Grand St., N. Y.

Bradley's cushioned helve hammers. See illus. ad. p. 406.

Split Pulleys at low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

Noise-Quieting Nozzles for Locomotives and Steamboats. 50 different varieties, adapted to every class of engine. T. Shaw, 915 Ridge Avenue, Philadelphia, Pa.

Stave, Barrel, Keg, and Hogshead Machinery a specialty, by E. & B. Holmes, Buffalo, N. Y.

Eclipse Portable Engine. See illustrated adv., p. 389.

For best Fixtures to run Sewing Machines where power is used, address Jos. A. Sawyer & Son., Worcester, Mass.

Sheet Metal Presses. Ferracute Co., Bridgeton, N. J.

Solid Emery Vulcanite Wheels—The Solid Original Emery Wheel—other kinds imitations and inferior. Caution.—Our name is stamped in full on all our best Standard Belting, Packing, and Hose. Buy that only. The best is the cheapest. New York Belting and Packing Company, 37 and 38 Park Row, N. Y.

Valve Refitting Machine. See adv., page 405.

For best low price Planer and Matcher, and latest improved Sash, Door, and Blind Machinery. Send for catalogue to Rowley & Hermance, Williamsport, Pa.

Portable Railroad Sugar Mills, Engines and Boilers, Atlantic Steam Engine Works, Brooklyn, N. Y.

Silent Injector, Blower, and Exhauster. See adv. p. 406.

The Paragon School Desk and Garretson's Extension Table Slide manufactured by Buffalo Hardware Co.

Planing and Matching Machines, Band and Scroll Saws, Universal Wood-workers, Universal Hand Jointers, Shaping, Sand-papering Machines, etc., manuf'd by Bentel, Margedant & Co., Hamilton, Ohio. "Illustrated History of Progress made in Wood-working Machinery," sent free.

Fire Brick, Tile, and Clay Retorts, all shapes. Borgner & O'Brien M'f'rs, 23d St., above Race, Phila., Pa.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

For Superior Steam Heat. Appar., see adv., page 406.

All makes and sizes of Steam Hammers bored out. L. B. Flanders Machine Works, Philadelphia, Pa.

Brass or Iron Gears; list free. G. B. Grant, Boston.

For best Belt Lacings, use Blake's Belt Studs. The strongest fastening for all belts. Greene, Tweed & Co., New York.

Holly System of Water Supply and Fire Protection for Cities and Villages. See advertisement in SCIENTIFIC AMERICAN of this week.

The E. Horton & Son Co., Windsor Locks, Conn., manufacture the Sweetland Improved Horton Chuck.

Special Wood-Working Machinery of every variety. Levi Houston, Montgomery, Pa. See ad. page 405.

Linen Hose, Rubber Hose, Steam Hose; all sizes. Greene, Tweed & Co., 18 Park Place, New York.

Power Hammers. P. S. Justice, Philadelphia, Pa.

Metallic Pattern Letters to put on patterns of castings, at reduced prices. H. W. Knight, Seneca Falls, N. Y.

For Reliable Emery Wheels and Machines, address The Lehigh Valley Emery Wheel Co., Weissport, Pa.

Steam Engines; Eclipse Safety Sectional Boiler. Lambertville Iron Works, Lambertville, N. J. See ad. p. 406.

Pays well on small investments; Magic Lanterns and Stereopticons of all kinds and prices; views illustrating every subject for *public exhibition and parlor entertainments.* Send stamp for 80 page Illustrated Catalogue. Centennial medal. McAllister, 49 Nassau St., New York.

Patent Steam Boiler Damper Regulator; most reliable and sensitive made. National Iron Works, New Brunswick, N. J.

For Shafts, Pulleys, or Hangers, call and see stock kept at 79 Liberty St., N. Y. Wm. Sellers & Co.

Electro-Bronzing on Iron. Philadelphia Smelting Company, Philadelphia, Pa.

Improved Steel Castings; stiff and durable; as soft and easily worked as wrought iron; tensile strength not less than 65,000 lbs. to sq. in. Circulars free. Pittsburg Steel Casting Company, Pittsburg, Pa.

The New Economizer, the only Agricultural Engine with return flue boiler in use. See adv. page 405.

Wm. Sellers & Co., Phila., have introduced a new injector, worked by a single motion of a lever.

Surveying Instruments. G. S. Woolman, 116 Fulton St., N. Y.

Nellis' Cast Tool Steel, Castings from which our specialty is Plow Shares. Also all kinds agricultural steels and ornamental fencings. Nellis, Shriver & Co., Pittsburg, Pa

Notes & Queries

HINTS TO CORRESPONDENTS.

No attention will be paid to communications unless accompanied with the full name and address of the writer.

Names and addresses of correspondents will not be given to inquirers.

We renew our request that correspondents, in referring to former answers or articles, will be kind enough to name the date of the paper and the page, or the number of the question.

Correspondents whose inquiries do not appear after a reasonable time should repeat them. If not then published, they may conclude that, for good reasons, the Editor declines them.

Persons desiring special information which is purely of a personal character, and not of general interest, should remit from $1 to $5, according to the subject, as we cannot be expected to spend time and labor to obtain such information without remuneration.

Any numbers of the SCIENTIFIC AMERICAN SUPPLEMENT referred to in these columns may be had at this office. Price 10 cents each.

(1) A. D. writes: 1. The cistern water we have here, when tested with the permanganate of potassa (distilled water solution), is of a brick dust color instead of a rose color. What is the cause of this? Is it due to the tinned roof or to the cement of the cistern? A. Probably the latter. 2. Do you know any method of restoring the red color which has faded on my Russian leather portmanteau? A. No.

(2) C. B. asks for a recipe for making a composition that would be hard enough to make pool balls, that would not be expensive, and also a recipe for coloring. A. Melt together over a gentle fire in an iron pot: pitch, 1 part; guttapercha, 2 parts; orange shellac, 5 parts; add to this 6 parts of white lead (lead carbonate) in impalpable powder, and stir until a perfectly homogeneous mixture is obtained; then cast and turn out. Color with the aniline dyes mixed with dilute alcoholic solution of bleached shellac.

(3) G. R. asks how to blue gun barrels. A. This is best done by submitting the barrel to heat until the required color is secured; but it may be done in a manner by applying to the barrel a little nitric acid, and allowing it to act upon the iron until a blue film appears, then wash the barrel thoroughly and oil it.

(4) J. G. asks: 1. Is there an ink that will dry quickly, or if there is not, can there be one compounded that will dry quickly, and print as nicely as that used in printing bank notes? A. Try the following: Shellac, 6 ounces; borax, 1 ounce; water, q. s.; boil together until perfect solution is effected, and triturate with this enough good iron black or nigrosin, to produce the desired color. A little alcohol will make the liquid flow more readily and dry quicker, but an excess must be avoided. 2. Please explain the principle of the steam injector? A. For a full explanation of the injector, see p. 99, Vol. 40, of SCIENTIFIC AMERICAN.

(5) E. P. M. asks: What would be the proper distance to place a bell from the ground, in order to convey its sound the greatest distance? A. A bell should be placed well above surrounding buildings, and if possible above trees. This subject is fully treated on p. 299 of current volume of SCIENTIFIC AMERICAN.

(6) P. B. asks: 1. What should I use to give a white and smooth surface to statues of plaster of Paris, after coming from the mould? A. Warm the cast and suspend it in melted white wax. The operation should be repeated until the wax is no longer absorbed. It is then allowed to become perfectly cool, when it may be polished. 2. How long should plaster of Paris be mixed with water before casting into the mould? A. Sprinkle the plaster into the water with which it is to be mixed. As soon as it settles to the bottom pour off most of the water, stir the mixture, and pour it immediately. 3. Please state what kind of stuff is used to make the plaster figures have a yellow tint (straw color)? A. Mix a little finely ground yellow ocher with the plaster, or stain the dry cast with a tincture of annatto or turmeric.

(7) "Woodworker" asks: Is there any danger of explosion from fire coming in contact with the fine dust of poplar and hard wood, blown through a Sturtevant blower into a shaving receiver or room? Can you give an instance of explosion of fine wood dust? A. There was an explosion of fine wood dust in the Pullman Palace Car Works in Detroit, Mich., a few years since. It occurred under about the same circumstances as you describe.

(8) C. F. C. asks what is the equivalent of a horse power. A. 33,000 lb. raised one foot high per minute.

(9) C. R. P. asks: Can you give us a substitute for alcohol for heating shoemakers' tools? It must heat well and not smoke the iron. A. There are several heaters in market using kerosene as fuel.

(10) W. W. S. asks: Is a building roofed with tin, corrugated iron, or other metal covering, less liable to be struck by lightning than if shingled, and if so, why? A. A building roofed with tin is not less liable to be struck by lightning than a shingle roofed building. If neither house were provided with a lightning rod, the tin roofed building, if struck, would be the safer, because the lightning would be likely to divide and spread over the metal, and find its way to the earth by several different paths on the exterior of the building, water leaders, gutters, etc. The wooden roof offers no such facility as metal for the spread or division of the electric charge, but is apt to tear its way through the building to the ground in one path.

(11) S. H. writes: 1. I have a spring which has 20 feet fall, with 500 feet of ¾ inch pipe running to my house; how much pressure have I? A. 9 lb. per square inch nearly. 2. Will it run a 6 gallon churn, and what kind of a wheel would be best? A. Address makers of water motors who advertise in our columns.

(12) O. J. H. asks: 1. Will the painting of wrought iron steam pipes with one coat of asphaltum varnish diminish permanently the heat-radiating power of such pipes. A. No. 2. Is there any other painting material preferable to asphaltum varnish for the purpose of giving the steam pipes a better appearance and making it easier to keep them clean? A. No. 3. Considering only the economy in fuel consumed for heating by steam, would it be advisable to use no paint of any kind at all? A. All radiating surfaces should have a dark color. Paint will do no harm provided it is dark and not too thick.

(13) J. A. M. asks how to calculate the proper thickness for cast iron head for wrought iron boiler, 36 inches diameter, 75 lb. pressure per inch. I fail to find it in Haswell or any other work of that kind which I have. A. You will find rules in "Wilson on Steam Boilers." In practice the thickness is more the result of experience than calculation, as much allowance must be made for possible defects in casting; the usual thickness is 1⅝ inch to 1⅞ inch.

(14) J. N. H. asks: Are graphite, plumbago, and blacklead one and the same thing? A. Yes.

(15) D. R. asks for a method by which to deodorize some pistachio nut hair oil, held by me in bulk, bought in London in 1872. There is only about a quart left, but it has become rancid, and can undoubtedly be deodorized. A. Try the following: agitate the warm oil with about one per cent each of caustic lime and calcium sulphite (sulphite of lime) in powder, defecate, and draw off the clear oil. Repeat the treatment, if necessary.

(16) H. W. writes: I am melting a great deal of pig tin and lead, and soon accumulate a large pile of oxide and dross. Can you give me any information in regard to a proper furnace for smelting this dross, so as to recover the metal in a shape for reusing? A. The metal cannot be recovered from the dross in the way suggested. This dross, which consists chiefly of a mixture of tin oxide and finely divided metal, is usually calcined and sold in this condition as putty powder. The metal can be recovered from the dross by mixing the latter with, say, one third its weight of fine coke or charcoal, and heating the mixture in large luted crucibles gradually to full redness. The reduced metal remaining with the unconsumed carbon may be separated by pounding the mass and sifting out the carbonaceous matters, and remelting the granular metal at a low heat.

(17) F. A. B. asks for the receipt for making what are called Chinese rods, and which upon being burnt diffuse a delightful odor. A. 1. Gum benzoin, 6 parts; balsam of tolu and powdered sandal wood, each 4 parts; powdered tragacanth and labdanum, each 1 part; powdered niter and gum arabic, each 2 parts; cinnamon, 12 parts; light charcoal (linden), 48 parts. Form into a smooth ductile mass by aid of heat, mould and cool. 2. Gum benzoin, olibanum, and storax (tears), each 12 oz.; niter, 9 oz.; charcoal, 4 lb.; moistened with solution of 2 oz. tragacanth in a quart of rose water. To this may be added, if desired, essence of roses, pure neroli or orange powder, 1 oz. Oils of cloves and nutmeg, essence of vanilla, cascarilla, etc., are sometimes added in addition to the foregoing.

(18) G. L. D. asks: What is the greatest depth the sea has been sounded—actual, not supposed? A. 4,655 fathoms by Commodore Belknap, U. S. N., and 4,575 fathoms by the Challenger (English) expedition.

(19) P. C. B. asks: 1. How can eggs be preserved so as to keep good for the winter? A. Pack the eggs in a brine consisting of a saturated solution of salt in lime and water. The lime water is prepared by agitating soft water with enough lime to impart to it a milkiness, allowing this to settle in a covered vessel, and drawing off the clear lime water. 2. How can apples best be kept good from fall to the winter and spring? A. The apples to be preserved should be selected with due regard to their time of ripening. A Rhode Island greening, for instance, which ripens in January, can by the following method be preserved in good flavor until March or April, but not longer, whereas a northern spy, golden, or Princess Russell, or any late ripening variety, can be preserved in full flavor until the following August or September, though they must be promptly used after opening. The method of preserving the fruit is as follows: Select only perfect fruit, envelope each tightly in two separate wrappings of any thin paper, pack them in clean firkins or air tight barrels, and head them in securely, air tight. Thus packed apples may be preserved in a perfectly sound condition for a year or more, though, as before remarked, if kept much beyond their regular time of ripening they will lose in flavor. 3. Which is the best way to preserve whole heads of cabbage so as to keep good in the winter and spring? A. Keep them in a dry place, in well aired barrels. 4. I have a copper ore which assays as follows: Copper, 63·76; iron, 10·50; sulphur, 25·57; gangue, 0·10; total, 99·93. The ore carries about 1 3-5 ounces gold per ton (=0·005 per cent) and some silver. How can I best and cheapest smelt it, say 75 or 100 lb. ore at a time? A. It will probably be necessary to chlorinize the ore and submit it to the amalgamation process. Consult Phillips' "Metallurgy of Gold and Silver."

(20) A. C. writes: I have been trying to make some varnish, but have failed so far, and want to know what is wrong. I put two ounces of bleached lac into a bottle, and covered with alcohol; it swelled, and I added alcohol till it filled a pint bottle. It is now a curdy mass with some fluid on the top of it. I warmed it and stirred without effect. What is the matter? A. Try 95 per cent alcohol.

(21) C. R. asks: Could I convey ground tan bark from the mill to leaches by means of a blower; if so, how should it be applied? A. The tan bark can be propelled by a blower if it is dry. If it is mixed with water, a centrifugal pump should be used. If you employ a blower, the bends in the pipe which conveys the tan bark should be of long radius.

(22) S. B. F. writes: We have a machinist that says a belt will slip less on a pulley that has not been turned than on a very smooth pulley. Is he correct? A. According to the experiments of Hoyt & Co., a belt will drive about 50 per cent more on a polished face iron pulley than on one with a rough face.

(23) A. E. F. asks: Why is it that the light side of the new moon appears larger to the naked eye than that portion made visible by the earth's light? The line of the moon's surface is seen in the bright position, corresponding in size to the outlines of the dark side. It being supposed that the moon has no atmosphere, how do the sun's rays produce this effect? A. The phenomenon observed by you is called irradiation. It is due to the fact that impressions of bright objects on the retina extend beyond the outline of the image. Irradiation differs in different people, and even in the same person it is different on different days. It also increases with the luminosity of the object. The electric light affords a marked example of this phenomenon. The source of light, which is scarcely more than a mere point, appears a miniature sun. An incandescent platinum wire looks many times larger than its actual size.

(24) A. B. C. asks for the best compound or simple substance with which to impregnate baked wood for insulators for telegraph lines. A. Plunge the wood for a few minutes in hot paraffine.

(25) E. H. S. asks: Is a telegraph wire a protection to a building if the wire is well insulated and has good ground connection? A. It might be a protection, but it would be very limited, as a telegraph wire of the usual size is not large enough to conduct a heavy lightning discharge.

(26) J. E. K. asks: 1. Does the density of the atmosphere affect the velocity of falling bodies? A. Yes. 2. To illustrate: Suppose a cup of water or oil to be suspended in the top of an air receiver in which there is a pressure of 60 lb. per square inch, if the cup was upset, would it require a longer time for the fluid to reach the bottom than it would if the air was of ordinary atmospheric density? A. It would.

(27) B. A. asks: Which is preferable for bolting foot blocks to joists, overhead—¾ bolts extending through block and joist with nut on end, or, ¾ wood screws extending through block and into joist 6 or 8 inches, sound hemlock joists—*i. e.* I mean which would be the easier drawn down or out—joists 12 inches thick? A. Through bolts and nuts are to be preferred; but if you use wood screws they should be at least ⅛ inch larger than the bolts.

(28) B. F. T. asks: 1. How can I make a paint for crockery, etc., that hot water will not wash off? A. Porcelain (or white ware) may be painted in enamel, that is, the design painted in metallic oxides and burned in (see Spon's Practical Receipts). Any ordinary paint that can be applied will not stand much washing, especially if hot water and soap are used. 2. How can I paint on cloth without sizing it and not have the paint spread? A. It is necessary to use size, unless the cloth is waxed.

(29) G. E. W. asks: What mode of measurement do you get the tonnage of a ship? A. You will find rules for tonnage in "Haswell's Engineer's Pocket Book."

© 1879 SCIENTIFIC AMERICAN, INC

(30) S. A. S. asks: How can I clean rust from the iron plates of a hydraulic press, so as to leave the plates perfectly clean and free from chemical odors? A. Try dilute sulphuric acid, say 1 part of acid to 10 of water. Wash the plates thoroughly after the application of the acid.

(31) S. E. W. asks (1) if lump lime will slake in oil. I want it for painting a large ice house as an improvement on whitewash. A. The slaking of lime is due to the formation of a hydrate of lime—to which reaction water is essential. Lime may be made into an emulsion with oil, but this emulsion is very different from the hydrate formed by water. 2. Also please send me the number of your paper that contains a description for making rubber stamps. A. See p. 1226, No. 83, SCIENTIFIC AMERICAN SUPPLEMENT.

(32) M. B. S. B. writes: My engine cylinder is 3⅛ inches long by 1½ inches in diameter. What sized boiler do I require? A. Your boiler should have from 10 to 15 feet fire surface, according to the pressure you wish to carry and speed of engine.

(33) E. A. D. P. asks: 1. What is meant by aperture? Is it the diameter of the object glass, or the opening of the diaphragm in the eye piece? A. It is the diameter of the clear or exposed portion of the objective. 2. For an object glass of 2½ or 3 inches diameter, how many lenses, of what size, and how far apart (measured perpendicular to their plane sides), will form the best eyepiece for ordinary astronomical purposes? A. You do not give focal length of your objective. It is probable that the answer to J. W. S. (14), p. 403 of current volume, will assist you.

(34) L. P. B. writes: I desire to send a stream of oxygen through water. Please inform me how I may do the same? A. Pass a glass tube from the oxygen reservoir to the bottom of the vessel. When the gas is placed under a light pressure it will force its way through the liquid.

(35) C. R. M. writes: I have an 80 horse power boiler, carrying 65 lb. of steam, runs a 65 horse engine, also supplies jacketed kettles, coils in tanks for heating water, steam tables, etc.; they are all connected to a narrow steam trap that discharges into a tank. Near the tank I have a double connection, by which I can shut the water from the tank and catch it in a pail and weigh it. Now, how many pounds of water per hour discharged by said trap ought to constitute one horse power? Can you give me a standard and reliable rule? A. There is no rule which will apply; a fairly good steam engine will furnish one horse power by consumption of 22 lb. steam. We think you might assume 22 to 24 lb. water per horse power.

(36) A. P. asks: 1. What tension will ½ inch boiler stand? A. It depends upon the diameter of the boiler and quality of the iron. 2. At what density does sea water form a deposit? A. Deposits of lime will commence, say, at 1½ densities by salinometer, and of salt at about 2½ densities. 3. How far from the first row of tubes must the gauge cocks be? A 3 to 4 inches. 4. How will salt and fresh water act when being mixed in boilers? A. The mixing will tend to make the water foam.

(37) F. W. D. asks how photographers prevent the disagreeable odor from collodion, etc., from becoming prominent? I cannot use it without scenting up all the surroundings. A. The odor cannot be diminished or cloaked; the annoyance is obviated by using the collodion only in a well ventilated closet.

(38) M. E. H. asks for the process of treating ships' sails so as to preserve them from mildew and decay. A. Saturate the fabric with a boiling solution of curd soap 3 lb., water 5 gallons. Press out excess of the solution between rolls, and digest for two hours or more in a solution of lead acetate 3 lb., water 2 gallons. Finally rinse well in water and dry rapidly without over-heating.

(39) H. K. & J. O. B.—Ordinary so called washing fluid is prepared by warming together one part of washing soda (commercial carbonate of soda) and two parts of lime in about 30 parts of soft water, and after the suspended carbonate has entirely subsided decanting the clear liquid for use. Aqueous solutions of water glass, soap, starch, chlorinated soda, borax, etc., are often added in various proportions.

MINERALS, ETC.—Specimens have been received from the following correspondents, and examined, with the results stated:

N. B.—No 1, feldspathic rock containing crystals of hornblende. No. 2, mica schist. Nos. 3 and 4, hornblende schist. No. 5, quartz and hornblende. No. 6, feldspar.—D. D. B.—Magnetite; if free from phosphorus and titanium an excellent iron ore.—A. S. T.—It is an impure ferruginous clay of little value.

[OFFICIAL.]

INDEX OF INVENTIONS

FOR WHICH

Letters Patent of the United States were Granted in the Week Ending

November 25, 1879,

AND EACH BEARING THAT DATE.

[Those marked (r) are reissued patents.]

A complete copy of any patent in the annexed list, including both the specifications and drawings, or any patent issued since 1867, will be furnished from this office for one dollar. In ordering please state the number and date of the patent desired, and remit to Munn & Co., 37 Park Row, New York city.

Air compressor, J. Clayton 222,014
Air or vacuum railway brakes, diaphragm for, B. L. Stowe 221,980
Amalgamating apparatus, vacuum, J. Absterdam. 221,990
Amalgamating pans, device for discharging, E. Coleman 222,018
Amalgamating pan, E. Coleman 222,019
Auger, hollow, W. A. Ives 222,051
Axle, car, S. D. Webster 222,108
Bale tie, R. M. Pattillo 222,073
Bale ties, upset or turn over buckle for, J. L. Sheppard 221,944
Bag fastener, Giles & Bryant 222,032
Barrel safety attachment, J. T. Flynn 222,029
Barrels, rack for tiering F. Stitzel 221,945
Bed, invalid, J. H. Archer 221,952
Beehive, J. Barnes 221,999
Bell, call, J. W. Butler 222,009
Berth for vessels, self-leveling, D. Huston 222,049, 222,050
Billiard cue cutter, H. Gottlieb 222,035
Binder, temporary, W. A. Amberg (r) 8,980
Binder, temporary, E. H. Thompson (r) 8,981
Bolt drawing machine, T. D. Wilson 222,112
Bolting cloth, cleaning, W. H. Moses 221,932
Book, E. S. Glover 222,033
Booms, device for raising and lowering, H. T. Stock 221,946
Boot and shoe heel burnishing machine, Z. Beaudry 221,954
Boot and shoe sole edge burnisher, S. Jacobson.. 222,052
Boring tool, A. F. Temple 222,101
Bottle, nursing, Michales & Bald 222,070
Box heads, machine for finishing, N. L. Seelye.... 222,083
Bracelet, A. W. Magerhaus 221,926
Brick-off bearing case, W. H. Ludlow 222,062
Bricks for constructing sidings, partition walls, etc., I. Marsh 221,963
Brush, C. L. Pond 221,936
Brush for washing carriages, etc., A. T. Gerike.... 222,031
Buckle, G. G. Bugbee 222,007
Buckle and trace carrier, combined, T. L. Wiswell 222,114
Bung, W. H. Stewart 222,094
Burr holder and spirit lamp, combined, T. S. Waters 222,107
Button hole cutter, M. L. & G. M. Sanborn 222,080
Calendering paper, etc., machine for, Schlatter & Gros 222,081
Calisthenicmotor, A. S Gear 221,959
Car door, grain, W. I. Stratiff 222,097
Car seat, E Chesterman 221,907
Cars, cooling and ventilating, W. P. Williamson.. 221,988
Carbureter, J. Wayland 221,948
Card, visiting, F. Oechsli 221,933
Carpet linings and similar fabrics, machine for making, J. C. Gray 222,037
Carriage top, J. N. Hazelip 222,043
Cartridge capping implement, G. A. Barnes 222,000
Cartridge loading apparatus, J. H. Murray 221,971
Castings, malleable iron, J. E. Atwood 221,996
Cattle chute, J. T. & R. A. McCoy 221,931
Cement, manufacture of artificial hydraulic or Portland, C. Brown 222,004
Children's chairs, locking device for the tables of, N. Bartell 222,001
Chuck, G. B. Kirkham 222,056
Churn operating machinery, W. N. Rhodes 222,076
Cigar lighter, automatic, C. Crook 221,941
Clasp, C. E. Johnson 222,055
Clothes line hook, F. G. Slemmer 222,086
Clothes pounder, W. F. Jenkins 222,054
Clutch and coupling, friction, E. L. Hartmann ... 222,040
Collars and cuffs, making celluloid, A. A. Sanborn 221,977
Cooker, steam feed, W. Collings 222,017
Corset, Schilling & Florsheim 222,082
Cotton and hay press, H. C. Green 222,038
Coupling, D. W. Clark 221,908
Cupola furnace, E. C. Atkins 221,995
Currycomb, E. Harris 221,962
Dental engine, E. T. Starr 222,093
Dentist's chair, E. T. Starr 222,092
Dish washing machine, S. Walker 222,103
Ditching machine, J. D. Comstock 221,910
Draught equalizer, R. A. Thompson 221,982
Drawing table, W. Holden 222,047
Drays, tail pin for, H. R. Atwood 221,902
Electric light, apparatus, A. G. Holcombe 221,918
Electrotype dies, making, Tufts & Andrews 221,985
End gate fastening, wagon, L. Talcott 222,099
Fan, air compressing, M. B. Miller 221,970
Fence wire stretcher, Clark & Orris 222,013
Firearm, magazine, A. Burgess 222,068
Firearm, magazine, J. M. Marlin 222,064
Firearm, revolving, J. M. Marlin 222,065, 222,066
Fire kindlers and lighters, composition for, E. Clark 222,012
Fish boner and scaler, A. J. Whitney 221,949
Furnace door, L. McKelvey 222,068
Furnaces and stoves, draught regulator for, G. O. Sanderson 221,978
Garment supporter, H. P. Andrews 221,951
Gas apparatus, vapor, J. Savage 221,942
Gas fixing retorts, heating benches of, T. F. Rowland 221,941
Gas governor, G. S. Woodruff 221,950
Gleaning and grain binding machine, M. A. Keller 221,922
Gold from auriferous deposits, machine for extracting, E. S. Bennett 221,905
Grain binder, S. D. Locke 222,060, 222,061
Grain binder knotting apparatus, M. A. Keller. .. 221,921
Grain drill, M. G. Madson 222,063
Grate, D. Richmond 222,077
Gun, magazine, F. Y. Sunderland 222,098
Hame fastener, J. P. Bell 222,002
Hammock support, V. P. Travers 221,984
Harness, instrument for mending, C. P. Adams... 221,991
Hat sizing machine, E. Beesley 222,117
Hay rake, horse, S. Ritty 221,974
Hinge, P. Hurm 221,963
Hinge, spring, G. M. Jewett 221,964
Hoe, G. W. Cloyd 222,015
Hoe and cultivator, combined horse, B. B. Small. 222,087
Horses, device for stopping, I. J. Warner 222,105
Hub, vehicle wheel, S. P. Ruggles 221,976
Hydraulic elevator, S. C. Rowell 221,940
Inkstand, A. D. Judd 221,965
Jacket can, Mason & Bergman 221,927
Jointer and cutter, combined, H. E. Wisner 222,113
Knob attachment, O. Stoddard 222,096
Lance, bomb, J. A. Brand 222,003
Mallet, A. G. McComb 221,930
Meat chopper, mince and sausage, J. I. Rough... 222,079
Mechanical movement, Z. Beaudry 221,953
Medical compound, G. Collins 221,909
Millstone supporter and driver, O. J. Bollinger.... 221,906
Mosquito net, etc., apparatus for stretching and dressing, I. E. Palmer (r) 8,978
Musical instrument mechanical, M. Gally 222,030
Oil cup, J. G. McBride 221,928, 221,929
Packing device for packing boxes, etc., A. D. Spencer (r) 8,977
Packing, steam, G. C. Phillips 222,074
Painting fence wire, apparatus for, F. C. Taylor.. 221,981
Painting pipes and tubes, apparatus for, J. B. Root 221,930
Paper collar machine, C. H. Denison 222,023
Paper pulp from wood, making, S. M. Allen 221,992
Pavement, concrete, C. M. Warren (r) 8,982
Pavement, street, E. Devilliers 222,025
Pedomotor, R Gornall 222,034
Pen, fountain, J. S. Bard 221,904
Pharmaceutical apparatus, J. T. West 222,109
Photo-negative engraving, Bachman & Peckinpaugh 221,997
Pipe, machine for the manufacture of spiral jointed, J. B. Root 221,988
Planter and fertilizer distributer, combined seed, J. A. Hill 222,045
Planter, corn, G. D. Haworth 222,042
Planter, corn, J. H Warfield 222,104
Planter, hand corn, E. Putnam 221,973
Planter, seed, B. Richardson 222,078
Plow, R. Adamson 221,901
Plow, C. A. Pratt 222,075
Plow, J. S. & E. C. Robinson 221,975
Pocket, safety, L. Jakubowski 221,920
Portable bath close M. J. Dexter 222,026
Pressure generator, hydrocarbon, H. H. Eames... 222,027
Printing machine, chromatic J. McNaught 222,069
Pump, A. W. Woodward 32,116
Pumping system, atmospheric, W. P. Barclay.... 221,903
Ratchet wrench, J. Woolford 221,989
Refrigerator and water cooler, combined, M. B. Titman 221,983
Rein holding device, A. Warth 222,106
Rowlock, T. Dowling 221,914
Sad iron, G. Petit 221,935
Sash fastener, R. Lee 221,967
Sash holder, Leguay & Vallotton 221,966
Sample box, F. F. Atkinson 221,994
Saw machine, drag, W. N Kyle 222,057
Sawing machine, drag, Thompson & Gray 222,102
Sawing trees, machine for, N. A. Daniels 221,912
Scarf shield, C. E. Foster 221,915
Screw driver, C. S. Wells 221,986
Screw, jack, R. Fjellman 222,028
Screw machines, extractor for metal, H. S Lansdell 222,039
Sewing machine button hole attachment, J. F. Snediker 222,089
Shoe, F. S. Stark 222,091
Shoe horn, M. F. Coon 222,020
Show case, H. G. Derr, Jr 221,913
Slate, M. F. Sullivan 221,947
Sled, J. H. Dennis 222,024
Sleigh, bob G. Hermance 222,044
Snow plow and brush, combined, P. Graff 222,036
Soldering machine, G. Browne 222,005
Spoons, making plated, Fowler & Holmes (r) 8,979
Spring clasp for braid and ribbon packages, H. Wolcott 222,115
Stamp canceler, J. A. McClelland 222,067
Staples, apparatus for inserting, bending, and clinching metallic, J. Shellenberger 221,979
Stave cutting machine, W. Sisson 222,085
Steam and water gauge, T. Holland 221,919
Steamer, feed, W. Collings 222,016
Sugar, etc., centrifugal apparatus for forcing volatile or corrosive liquids through or from, O. H. Krause 221,923, 221,924
Sulphocyanides, apparatus for making, Tcherniac & Gunzburg 222,100
Target, surveyor's, S. Haslett 221,916
Telephone, T. A. Edison 221,957
Thill coupling, W. M. Curry 222,021
Ticket box, Sergeant & Porter 221,943
Tiles for roofs and pavements, illuminating, J. Jacobs 222,053
Tile machine attachment, P. Ozmann 221,934
Time lock, S. Shaw 222,084
Tobacco chopper, E. Hain 222,039
Tobacco, manufacture of plug, P. J. Sorg 222,090
Tomb, McMinn & Filbey 221,969
Toy money box, C. B. Bailey 221,998
Toy money box, L. Kyser 222,058
Trace carrier, A. F. Hill 222,046
Trees for winter protection, machine for preparing the tops of, S. H., N. F., & L. Murray 221,972
Truss, G. Gleim 221,960
Tuyere, J. F. Hause 222,041
Umbrella frame, J. Miniere 222,071
Vacuum brake pipe coupling, T. W. Welsh 221,987
Vacuum engine, B. Goldmann 221,961
Vapor burner, E. F. Rogers 221,937
Valve, slide, E. S. Chapell 221,956
Valve, steam engine slide, E. S. Chapell 221,955
Vehicle spring, J. Krehbiel 221,925
Velocipede, P. Denham 222,022
Velocipede, H. Hassenpflug 221,917
Vessels, air port for, T. D. Wilson 222,111
Water closet valve mechanism, W. M. & J. Smeaton 222,088
Weather strip, W. St. Charles 222,095
Weed turner, J. D. Cates 222,011
Wells, clamp for elevating tubing in oil, G. W. Fair 221,958
Windwheel, H. B. Myers 222,072
Windows, portable decorative balcony for, Brument & Goldberg 222,006
Wood, grinding, S. M. Allen 221,993
Wool press, Willis & Funkhouser 222,110
Yoke and bow, ox, M. Cantoni 222,110

DESIGNS.

Coffin plates, E. H. & J. H. Eldridge 11,526
Heating stoves, E. Bussey 11,525
Ladies' and children's hoods, S. M. Hodge 11,527
Trunk fixtures, C. A. Taylor 11,523, 11,534

English Patents Issued to Americans.

From November 18 to November 25, inclusive.

Curtain roller, H. L. Judd, Brooklyn, N. Y.
Fountain pen, A. T. Cross, Providence, R. I.
Money received, apparatus for preventing fraud in, G. Beadle, Syracuse, N. Y.
Steam engine, W. F. Goodwin, Stelton, N. J.
Sulphate of lime, manufacture of, Z. C. Warren, New York city.
Tramways, A. S. Halladie, San Francisco, Cal.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.
(About eight words to a line.)

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

☞ The publishers of this paper guarantee to advertisers a circulation of not less than 50,000 copies every weekly issue.

THE SALT MANUFACTURE OF MICHIGAN. By S. S. GARRIGUES, Ph.D. One engraving. A Complete and Instructive Description of Salt Making. The Well-boring Machinery. Pumping and Evaporating Brine. Kettle and Pan Blocks. Solar and Steam Evaporation. Grades, Qualities, and Analyses of Salt. Tabular Statement of Companies, Capital, Amount of Salt produced, number of Kettles, etc. Cost, Profit, Labor, and Details. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. **102.** Price 10 cents. To be had at this office and of all newsdealers.

SILVERING GLASS.—THE LATEST AND Best Method of Silvering Mirrors and other articles of Glass by Chapman's, Siemens', Petitjean's, Draper's, and Lavat's Processes. SUPPLEMENT **105.** Price 10 cents.

PERUVIAN ANTIQUITIES. BY E. R. Heath, M. D., the most recent visitor to the home of the Incas. An intensely interesting account of the Remarkable Ruins and Walls of the Jequetepeque Valley, Peru. The Prisons of Pizarro and Atahualpa. Description of the Wonderful Huacas, or burial mounds, near Truxillo. Accounts of the immense treasures of Gold that have been found in the Huacas. The immense Huacas, near Ancon and Passamayo, and the interesting relics found therein. The extensive ruins of the Huatica Valley. The Huaca of Pando. The Huaca of the Bell. Description of the Temples and Fortresses of the Huatica Valley. The Huaca of Ocharan, the largest burial mound in the valley, inclosing 117 acres. The great Inca Temple of the Sun, in the Valley of Lurin, and its dimensions. The extensive ruins in the Canete Valley, and the interesting relics that have been discovered in them. The effects of earthquakes that have taken place on the Peruvian coast. The extraordinary Masonry composing the walls, temples, houses, towers, etc., in the Mountain districts. The wonderful Structures in the City of Cuzco. The ruins on the Islands in Lake Titicaca. The notable ruins at Chavin de Huanta, Corralones, Huaytar, Nazca, and Quelap. Half a Million Miles of Wonderful Stone Wall, averaging 3 to 4 feet high, and enough to encircle the globe ten times! Who were the people that constructed this and the other wonders of Peru? The Ancient Peruvian Records, and what we learn from them. The geologic changes that have taken place in Peru; the rising and sinking of its coast, and the several risings and sinkings of the Andes. Speculations as to whether a great continent once occupied the present site of the Atlantic. This valuable paper, by a well known American Archæologist and a close and patient observer, contains much that is new, and is written in an exceedingly pleasant style. Contained in SCIENTIFIC AMERICAN SUPPLEMENTS, Nos. **158** and **159.** Price 10 cents each. To be had at this office, and from newsdealers everywhere.

MOLECULAR PHYSICS IN HIGH VACUA. By William Crookes, F.R.S. A lecture copiously illustrated with new and interesting experiments, showing that matter exists in a fourth state, and in a condition as far removed from that of gas as gas from liquid, where the properties of gases and elastic fluids almost disappear, whilst in their stead are revealed attributes previously masked and unsuspected. The Kinetic theory of gases explained in a clear manner by the aid of a simple illustration. The ordinary radiometer and an explanation of its movement. Description of the new form of radiometer used in these experiments. Explanation of the dark space which is observed surrounding the negative pole when a discharge is passed through an exhausted tube. Experiment to show that the molecules thrown off from the excited negative pole leave it in a direction almost normal to the surface. The phosphorescence of these molecular rays. Their color shown to be due to the composition of the glass. Experiment to show that the phosphorescence of the glass is dependent on the degree of perfection of the vacuum. The rays producing the phosphorescence will not turn a corner; experiment to show this. The cause of phosphorescence. The phosphorescent properties of other bodies than glass; sulphide of calcium; the diamond; ruby natural and artificial; sapphire; pure alumina, etc. Experiments showing that the rays coming from the negative pole project an image of anything that happens to be in front of it. The important fact that this phosphorescence teaches us. Experiments to show another fact connected with the negative discharge, *i. e.*, that the rays obey magnetic force. The heating of the glass where the phosphorescence is strongest. Experiments with apparatus which intensifies this heat at the focus. Platinum wire melted. Iridio-platinum melted. The violence of the impact of the molecules which are driven from the negative pole shown by experiment. Their violence manifested in their heating power. The facts elicited by the preceding phenomena, and what they prove. This lecture complete, illustrated with 19 engravings, is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **189.** Price 10 cents. To be had at this office, and from all newsdealers.

CAVEATS, COPYRIGHTS, LABEL REGISTRATION, ETC.

Messrs. Munn & Co., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine Improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had OVER THIRTY YEARS' EXPERIENCE, and now have *unequaled facilities* for the Preparation of Patent Drawings, Specifications, and the Prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Registration of Labels, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very moderate terms.

We send free of charge, on application, a pamphlet containing further information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases, Hints on the Sale of Patents, etc.

Foreign Patents.—We also send, *free of charge*, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world. American inventors should bear in mind that, as a general rule, any invention that is valuable to the patentee in this country is worth equally as much in England and some other foreign countries. Five patents—embracing Canadian, English, German, French, and Belgian—will secure to an inventor the exclusive monopoly to his discovery among about ONE HUNDRED AND FIFTY MILLIONS of the most intelligent people in the world. The facilities of business and steam communication are such that patents can be obtained abroad by our citizens almost as easily as at home. The expense to apply for an English patent is $75; German, $100; French, $100; Belgian, $100; Canadian, $50.

Copies of Patents.—Persons desiring any patent issued from 1836 to November 26, 1867, can be supplied with official copies at reasonable cost, the price depending upon the extent of drawings and length of specifications.

Any patent issued since November 27, 1867, at which time the Patent Office commenced printing the drawings and specifications, may be had by remitting to this office $1.

A copy of the claims of any patent issued since 1836 will be furnished for $1.

When ordering copies, please to remit for the same as above, and state name of patentee, title of invention, and date of patent.

A pamphlet, containing full directions for obtaining United States patents sent free. A handsomely bound Reference Book, gilt edges, contains 140 pages and many engravings and tables important to every patentee and mechanic, and is a useful hand book of reference for everybody. Price 25 cents, mailed free.

Address

MUNN & CO.,
Publishers SCIENTIFIC AMERICAN,
37 Park Row, New York.
BRANCH OFFICE—Corner of F and 7th Streets, Washington, D. C.

© 1879 SCIENTIFIC AMERICAN, INC

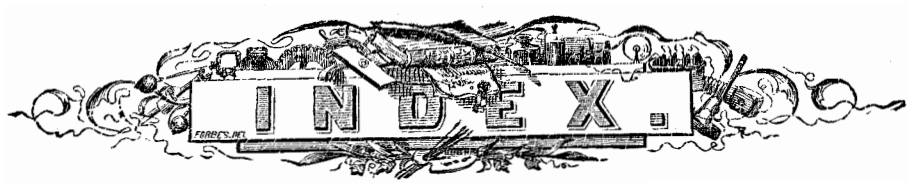

ILLUSTRATIONS.

A

Acheron, spar torpedo vessel..... 69
Acids from electric lights..... 261
Air compressor, duplex..... 410
Amalgamator, new..... 262
Amateur mechanics.....20, 54, 95
American industries.....273, 287, 303, 340
Anchor, improved..... 9
Ancient keys..... 25
Astronomical notes.....180, 381
Aswail, the..... 55

B

Baptismal font..... 265
Barber's chair, new..... 246
Barrel hoop, novel..... 291
Barrel lifter, the..... 327
Battery, cheap.....(10) 91
Bessemer steel..... 127
Blast engine..... 332
Boat-lowering apparatus..... 412
Boat, surf, new..... 198
Brick machine, new..... 50
Bridge, St. Louis..... 379
Brown & Sharpe Mfg. Co. shops. 271
Bubble blower, new..... 73

C

Cabinet, Arabesque..... 281
Cabinet seat, improved..... 325
Calculating attachment, new..... 231
Canal towing, Belgium system... 143
Candle, novel..... 262
Candlestick, new..... 378
Car, steam, novel..... 50
Car step, new..... 414
Cartridge, Tyler..... 246
Carving attachment for lathes... 243
Car wheel borer, vertical..... 210
Chair, barber's, new..... 246
Chair, window cleaning..... 342
Chum, improved..... 98
Clock, a wonderful..... 191
Clock, mysterious..... 297
Clock, pneumatic..... 5
Clock, Rosset's..... 226
Coal tipping machines..... 290
Comet, Swift's, of 1879..... 116
Copying process, new..... 325
Corkscrew and and bottle faucet. 291
Crusher, sectional-cushioned..... 306
Cuff holder, new..... 19
Cut-off, new..... 102
Cycloscope, the..... 131

D

Decoys for wild fowl..... 247
Device for sep. cream from milk. 9
Diploma, Grand Prize, of Paris Ex 63
Discoveries, curious..... 57
Discoveries, remarkable, Crooke. 232
Drag sawing machine..... 230
Drag sawing machine, new..... 21
Drawing apparatus, prospective. 307
Drilling scow, United States..... 31
Drying machine..... 162

E

Egg holder, new..... 399
Ejector, Friedmann's..... 319
Electrical generator, Edison's. 239, 242
Electric current regulator, new.. 101
Electric lamp..... 274
Electric lamp for English shilling 293
Electric lamp, new..... 4
Electric lamp, new form of..... 166
Electric lamp, Reynier's..... 194
Electric light in photography.... 47
Elephant shrew..... 7
Elevated railway, found'n plate.. 338
Elevated railways, progress of... 255
Elevators, floating..... 207
Engineer's transit, improved.... 214
Engine, portable, new..... 19
Engine, steam, Exeter..... 51

F

Faience..... 103
Faience, French..... 233
Fan, lace..... 153
Fence post, iron, new..... 149
Fire escape, new..... 230
Fire lighter, automatic, new..... 339
Fire screen..... 201
Fish, parrot, great American.... 23
Fishway, new..... 275
Flange coupling, new..... 179
Flour mill, portable..... 70
Flour mills, horizontal, French.. 243
Flying dragon, the..... 118
Flying fox..... 295
Fork and spoon, combined..... 66
Fountain, discharge for.....(28) 124
Fox, flying..... 295
Frog, five-legged, a..... 165

G

Gas exhauster governor, new.... 15
Gear dressing machine..... 150
Gila monster..... 399
Glass tubing..... 361
Glassware, ancient..... 385
Glassware, Roman..... 311
Goat antelope, Japanese..... 135
Grain trade of New York..... 208
Grinding mill, improved..... 83
Gun, hammerless..... 411
Gun, the Thunderer's..... 130

H

Harris-Corliss Engine..... 175
Haymaking, artificial..... 358
Hoop, barrel, novel..... 291
Horse clipping machine, new.... 210
Horse detacher, new..... 378
Hose coupling, improved..... 15
Hose nozzle, new..... 395
House-builder, moth..... 343
Hydraulic ram, new..... 262
Hydrometer..... 223

I

Ibex, the..... 359
Ice breaker, new..... 58
Industries, American..... 303, 340
Instrument for ringing swine..... 147

J

Jewelry, electric..... 263
Journals, to prevent heating..... 323

K

Kansas whirlwind..... 1
Keys, ancient..... 25

L

Lace fan..... 153
Lamp, electric, new..... 4
Lathes, milling attachment for.. 38
Lamp, electric..... 274
Lamp, electric, for Eng. shilling. 293
Lamp, electric new..... 4
Lamp, electric, new form of..... 166
Lamp, electric, Reynier's..... 194
Leather factory, Howell & Co.'s. 407
Lenses..... 159
Letter press, lock..... 117
Lightning arrester.....(5) 91
Linen Company, Willimantic..... 351
Lock, nut, improved..... 86

M

Machines, drying..... 162
Magnetism, prac. exper. in...211, 227
Magnetometer, new..... 99
Mara, the..... 23
Mechanics, amateur 20, 54, 95
Meridian, circle, the..... 111
Metal spinning..... 95
Meter, water, new..... 34
Milk, skimming..... 178
Mill, an improved..... 54
Miter cutter, new..... 134
Moth, house builder..... 343
Motor and meter, new..... 278
Motor, tramway, new..... 354
Musical instrument, new..... 342

N

Narica, the..... 87
Nut lock, improved..... 86

O

Oil cabinet, improved..... 382
Optical delusion, new.....85, 133
Optical delusion, explanation.... 133
Otooyon, the..... 231
Otter, the..... 237

P

Palissy plate..... 263
Parrot fish, great American..... 23
Patents, American, recent..... 18
Pavement rammer, steam..... 294
Pens and pencils, manuf. of..... 303
Photography, electric light in.... 47
Piano and organ factory, Beatty. 391
Pilot boat Hercules, steam..... 394
Piston and packing, new..... 98
Plowing by electricity..... 41
Plow, mammoth..... 294
Pneumatic clock..... 5
Pocketbook, recording..... 246
Polar expedition, new British.... 183
Polar pantograph, the..... 66
Portable engine, new..... 19
Potato digger, improved..... 66
Powder post insects..... 261
Press, a new..... 166
Press, machine & process, Jones' 22
Press, oak, Gothic..... 185
Pressing machine, improved..... 82
Progress at Menlo Park..... 52
Projectile, new..... 395
Propeller screw, new..... 130
Propelling apparatus, new..... 38
Pruning and grafting implement. 398
Pump, boiler feed, improved.... 150
Pump, rotary, novel..... 6
Pumps, chain, improvement in.. 379
Punch and shear, combined..... 194
Punching and shearing press.... 179

R

Railroad lock, portable, imp..... 118
Railroad tie, new..... 83
Railways, elevated, progress of.. 255
Recording pocketbook..... 246
Resistances, measuring..... 395
Rheostat, a cheap.....(10) 187
Rheostat, improved..... 147
Rotary motion..... 216
Rotary pump, novel..... 6

S

Sad iron and fluting roller, comb. 102
Sanitarium, Holloway..... 215
Saw gumming, improvement in. 86
Scaffolding, screw..... 134
Scarus quacamaia..... 23
Scovill Manufacturing Co.'s Works 375
Scow, drilling, United States..... 31
Screw driver, improved..... 358
Sea cow, great, of Florida..... 279
Sea serpent, the great..... 415
Sewer gas stopper, new..... 40
Sewer trap, new..... 19
Shearing and riveting machinery 259
Shingles, machine for making... 22
Signaling instruments, electrical 395
Silver-plated ware, manuf. of.... 296
Sleeping-car berth, improved.... 307
Soap manufactory, views of..... 335
Spar torpedo-vessel, Acheron.... 69
Spindle, an improved..... 327
Spot on disk of Jupiter..... 180
Steam-fitter, young, hints to..... 355
Steam heating, the Holly system 174
Steam whistle, improved..... 117
Steel, Bessemer..... 127
Stone dressing tool, new..... 414
Stovepipes, improvement in..... 262
Straw-cutter, improved..... 118
Sun's, the, radiant energy..... 53
Sun, the, a source of power..... 67
Sweeper, new..... 339
Swelled trunk palm, the..... 151

T

Tadpoles..... 343
Tamarind, the..... 215
Tarsier, the..... 247
Telephone, Edison's latest..... 198
Telephone experiment.....(10) 91
Telephone, new..... 410
Telephone, universal..... 4
Thermometer, metallic..... 163
Thick-thighed walking stick..... 7
Tongs, hardening, improved..... 398
Tornelia..... 71
Torpedo experiments, new..... 257
Tracing apparatus, Pratt's..... 395
Traction engine, novel..... 382
Tramway, self-laying..... 163
Transmitter, Blake..... 274
Transmitting motion, device for 166
Treadle motion, novel..... 394
Tree, giant..... 135
Tubular piles..... 147
Tug coupling, improved..... 34
Tuning fork, resonant..... 293
Tying-in machine..... 398

V

Valves, manufacture of..... 79
Vases, bronze, Japanese..... 217
Velocipede, new..... 338

W

Walking stick, thick-thighed.... 7
Wheel valves, improved..... 35
Water meter, new..... 34
Water wheel, improved..... 35
Whale and the grampus..... 167
Whirlwind, Kansas..... 1
Whooping cough, cause of..... 397
Windmill, new..... 291
Wire covering machine.....(21) 124
Woodcock, singular habit of..... 383
Work table implement, novel... 118
Wrench, a new..... 278

MISCELLANY.

Figures preceded by a *star* (*) refer to illustrated articles.

A

Absinthe, baneful effects of..... 234
Academy of sciences, National.. 313
Academy of sciences, N. Y..... 353
Accident, singular..... 377
Acid poisons, antidote for.....(34) 59
Acids, antiseptic action of..... 152
Acids from electric lights.....*261
Acheron, spar torpedo vessel..... *69
Acoustics, opp. for discoveries in 81
Activity not energy..... 90
Adirondack survey, the..... 152
Advertisers, a fact for..... 377
Advice to bathers..... 25
Africa, future of..... 409
Africans, white..... 103
After graduating—what?..... 89
Agamemnon, launch of the..... 260
Age of the world..... 200
Allanthus wood..... 199
Air as a stimulant..... 346
Air chamber, proportion of...(25) 92
Air compressor, duplex.....*410
Air, compressed.....(2) 59
Air torpedo, compressed..... 314
Alarm, electric.....(34) 172
Alcohol by electricity..... 328
Alexis St. Martin..... 63
Alizarin blue..... 411
Alloy, new..... 21
Aloes as a dressing for wounds.. 341
Alpine tunnel, great..... 106
Alum in baking powders..... 32
Alum not in English bread..... 38
Aluminum in telegraphing..... 232
Amalmagator, new.....*262
Amateur mechanics.....*20, *54, *95
America, discovery of..... 128
America's future, Gladstone on. 137
American Association.....96, 176
American Assoc'n, proceedings. 180
American carvings, ancient..... 9
American competition..... 90
American dental convention.... 145
American gynecological society. 218
American industries.....273, *287, *303, *340, 357, 380
American ind'ies, Sec. Evarts on 149
American institute exhibition..84, 97, 111, 130, 154, 184
American institute fair.....209, 256
American institute of architects. 353
American manufactures in Cuba. 101
American philological associat'n 106
American science association.... 161
American tariffs..... 104
American trade revival..... 264
American way, the..... 160
Ammonia bath, the..... 80
Ammonia, intravenous inj'n of.. 69
Ammonia on brass..... 411
Ammon, sulph. of cop. in neural'a 200
Anaconda, crushed by an..... 354
Anæsthetics, action of..... 193
Anchor, improved..... *9
Ancient American carvings..... 9
Ancient intercourse with China.. 9
Ancient keys..... *25
An invention called for..... 116
An inventor victorious..... 9
Animal rubber..... 415
Anthracite coal in Mexico..... 5
Anthracite, fossil footprints in.. 87
Antidote to poison..... 147
Anti-fat..... 344
Antiquities from Chiriqui..... 38
Anti-vaccination folly..... 304
Ants, curious facts about..... 71
Apple rot, cause and prevent'n of 343
Apples, to preserve.....(19) 417
Aqua-regia on platinum..... 216
Aquaria, chem. and phys. of..... 118
Aquarium, cement for.....(25) 59
Architectural designs, copying.. 314
Argan oil..... 203
Arsenic in the brain..... 244
Arsenic in water colors.....42, 131
Art, industrial, in New York..... 9
Artisans, skilled, of France..... 292
Asphalt and timber floors..... 20
Assaying, books on.....(37) 172
Assays.....(22) 91
Astronomical notes.....8, 73, 136, *180, 197, 276, 356, 381
Aswail, the..... *55
Atlantic cable, new..... 377
Atlantic, passage, quickest..... 19
Atlantic temperatures..... 183
Atropine and philocarpine..... 312
Attraction..... 312
Audiphone, another..... 342
Aurora borealis..... 314
Aurora, the..... 133
Australian exhibition.....100, 129
Australian railway, new..... 345
Azores, geysers of the..... 37

B

Babbitt metal.....(13) 155
Balloon, captive, at Coney Island 32
Ballooning, experimental..... 274
Bamboos as food..... 339
Band saw, wooden pulleys for (7) 187
Bank of England notes..... 85
Baptismal font..... *265
Bark lodge, how to make..... 134
Barometer handkerchiefs.....(24) 283
Barometer tube, to fill.....(1) 267, 292
Barrel hoop, novel..... *291
Barrel lifter, the..... *327
Bathers, advice to..... 25
Battery, cheap.....(10) *91
Battery, electromotive free of (1) 139
Battery, gravity..... (3) 43
Battery, Grenet.....(14) 299
Battery, Leclanche. (37) 28, (17) 139
Battery, salts formed in.....(10) 27
Battery solution.....(27) 172
Batteries.....(33) 172
Batteries, E.-M. force of.....(3) 123
Batteries, to prev. evap'n f'm (1) 299
Beard, an extensive..... 273
Bee farm, large..... 279
Bells.....(2) 299
Belts, oil for.....(24) 43
Benzoate of soda..... 396
Bessemer, Sir Henry..... 6
Bessemer steel.....*127, 297
Bessemer steel interest..... 192
Best goods always pay best..... 338
Bicycle race, the last..... 244
Birds, giant, of New Zealand..... 24
Birds, railway..... 341
Bismuth crystals, to obtain....(29) 124
Bite of the skunk, the..... 182
Bitten by a skunk, but alive..... 216
Blackboards, composition for (14) 331
Black lead for batteries.....(23) 188
Blackmildew of walls..... 168
Blake transmitter..... 324
Blast engine.....*322
Blowing up river snags..... 169
Blowpipe, electric..... 70
Blushing and blanching..... 152
Boating, overland..... 121
Boat-lowering apparatus.....*412
Boat, propelled by steam jet...(1) 59
Boat, surf, new.....*198
Boat, motors for.....(44) 44
Boats, to propel.....(3) 75
Boats, torpedo.....217
Bodie mining district, the.....*148
Boiler coil.....(2) 251
Boiler explosions..... 122
Boiler preparation.....(22) 107
Boiler, small.....(11) 123
Boiler, strength of.....(8) 75
Boilers, flue and tubular.....(9) 11
Boilers for yachts.....(21) 27
Boilers, test for.....(28) 204
Boilers, to prevent rusting....(19) 59
Boilers, use of petroleum in..(19) 203
Bonito, catching the..... 138
Book leaves, to clean.....(6) 283
Books, the insect enemies of..... 118
Boomerang, the..... 168
Boxes, to set in wheels.....(40) 60
Brake, new..... 163
Brain growth..... 298
Brain of an anthropologist..... 309
Brass manufacture..... 380
Brass, to cast on iron.....(17) 283
Brass, to clean.....(16) 27
Brass, to lacquer.....(27) 188
Brass work..... 281
Brass works, Scovill..... 375
Bread, baker's *vs.* home made (8) 139
Breadstuffs and provisions..... 225
Brick machine, new.....*50
Bridge, English chan'l, proposed 182
Bridge, iron, pushing across a riv. 273
Bridge of old rails..... 346
Bridge, St. Louis.....*379
Bridge, suspension.....(32) 108
Bridge, susp., btw. N. Y. and Bkln 48
Broken coal, to unite.....(23) 283
Broker's agency, the..... 341
Bromine in the U. S..... 240
Bronze casting in wax..... 103
Bronze, manganese..... 21
Bronze powders, size for.....(8) 331
Brown & Sharpe Mfg. Co. shops. *271
Brutes, intellectin..... 88
Bubble blower, new..... *73
Building in New York..... 264
Building timber, diseases of..... 3
Bureau of national survey..... 81
Business of the patent office..... 293
Butter package wanted..... 138
Butter, to distinguish from lard. 47

C

Cabinet, Arabesque.....*281
Cabinet seat, improved.....*325
Calculating attachment, new.....*231
Calico printing..... 401
Camelia japonica, seeds of..... 35
Camphor, electrical.....311, 322
Canal across the Isthmus..... 26
Canal mowing machine wanted.. 105
Canal or ship railway?..... 64
Canal towing, Belgium system...*143
Candle, blowing out a..... 239
Candle, electric, improved..... 265
Candle, novel.....*262
Candlestick, new.....*378
Cape of Good Hope..... 264
Car step, new.....*414
Carbolic acid, discovery in..... 169
Carbolized air..... 50
Carbon for batteries.....(19) 300
Carica papaya..... 231
Carp, cultivation of..... 383
Carpeting the Mississippi..... 308
Carriage pigeons..... 6
Cartridge, Tyler.....*246
Car, steam, novel..... *50
Car, twin cylinder..... 293
Car wheel borer, vertical.....*210
Car wheels, paper.....(30) 12
Cars, action of on curves....(33) 60
Carving attachment for lathes...*243
Carvings, American, ancient..... 9
Castor oil, to sweeten and purify.....(19) 283
Castor oil, to test.....(19) 283
Castor oil, preparation of..... 400
Catskill mountains..... 194
Cave, remarkable, discovery of.. 262
Cavern, inscribed, in Wisconsin.. 40
Caves, mountain, Cumberland... 181
Cedar posts, to preserve.....(35) 108
Cellar drainage.....(21) 11
Cement acid proof.....(4) 12
Cement for belting.....(26) 300
Cement for leather.....(6) 283
Cement for meerschaum.....(9) 283
Cement, rubber.....(9) 27
Cement to resist kerosene.....(4) 171
Cements for furnaces.....(3) 283
Cental system, the..... 52
Central park zoological collect'n 17
Chair, barber's, new.....*246
Chair, window cleaning.....*342
Chanoine dam at Pittsburg..... 382
Charleston's great fire of 1861.... 345
Cheiloangioscopy..... 329
Chemical nomenclature..... 413
Chemical reaction of blossoms... 215
Chemical telegraph solution..(24) 124
Chemicals, home..... 244
Chemistry, molecular..... 83
Chemistry, organic, future of.... 209
Chemistry, where to study..... 65
Chest development and consump. 400
Chicago, progress of..... 277
Chicle..... 377
China ware in New Jersey..... 103
Chinese, ebb of the..... 413
Chinese rods, to make.....(17) 417
Chloral in whooping cough..... 199
Chlorophyl..... 244
Christian era, beginning of...(12) 403
Chrome, iron on.....(10) 331
Churn, improved..... *98
Cider, how to preserve..... 81
Cider mill, cloth for.....(18) 59
Cider, to preserve sweet.....(14) 251
Cinchonidine in quinine.....(5) 251
Cincinnati exposition, the..... 192
Cincinnati industrial exhibition. 64
Cities, chief, 85 years ago..... 412
City horses..... 165
City, toy, a..... 5
Clambake, pre-historic..... 229
Clay, white, to color.....(21) 51
Cleopatra's needle, moving..... 322
Cleopatra's needle, preserving.. 26
Climate of Europe..... 282
Clock, a wonderful.....*191
Clock, mysterious.....*297
Clock, pneumatic..... *5
Clock, Rosset's.....*226
Clocks, a couple of..... 132
Clothing, manufacture of..... 282
Cloth paper, to make fireproof.... 218
Cloth, to waterproof.....(5) 251
Clover seeds, how to save..... 170
Coal, anth., effect of exposure on 100
Coal, anthracite, in Mexico..... 5
Coal crop, the..... 118
Coal, origin of..... 402
Coal crop, the..... 118
Coal, economical use of..... 135
Coal, formation of..... 33
Coal near Hudson's Bay..... 291
Coal on the Pacific coast..... 35
Coal tar, to remove.....(33) 44
Coal-tipping machines.....*290
Cochineal insects, facts about.... 325
Cocoanut milk, new use for..... 115
Codfish trade, California..... 68
Coffee pest, specific for the..... 152
Cog-wheel, a large..... 176
Cold, a, how to stop..... 386
Cold wave, where it comes from 414
Colic, treatment of..... 295
Collision, strange, at sea..... 194
Collisions at sea..... 336
Cologne cathedral, completion of 308
Color blindness, relief of..... 130
Coloring matter, new..... 216
Combustion, spontaneous..... 6
Comet, Swift's..... 17
Comet, Swift's, of 1879.....*116
Commercial enterprise..... 357
Commercial marine, world's.... 396
Commissioner of Patents..... 161
Competition, American in Eng.. 51
Composi'n pat'rn ornaments,(16) 155
Composition for pool balls....(22) 403
Compressed air vessels.....(14) 171
Concert rooms..... 248
Consumption.....(42) 44, 241
Consumption, cause of..... 9
Convention of civil engineers.... 19
Co-operation, practical..... 152
Copper mining in New Mexico.... 26
Copper, to amalgamate.....(18) 107
Copper, to granulate.....(35) 60
Copying ink, black.....(23) 267
Copying pad, ink for.....(8) 299
Copying processes, new.....234, *325
Copyrighting fruit..... 193
Corkscrew and bottle faucet.....*291
Corrosion of the metal tin..... 216
Cotton bales, covering for..... 145
Cotton factories for the South... 266
Cotton goods, Amer., quality of.. 3
Cotton mills in South Carolina... 26
Cotton, some facts about.....280, 329
Cotton thread, American..... 104
Cotton by white labor..... 399
Cottons, American, for India..... 234
Conch pearl..... 321
Coupe cars for London..... 121
Cow, deaf-mute, a..... 86
Crabs of Cape Verde Island..... 165
Crank shafts, large..... 220
Crayon drawings, to fix.....(28) 300
Cream, who will can?..... 138
Credulity, scientific..... 3
Crickets stop a train..... 7
Crocodile oil..... 253
Crooke's experiments.....(7) 171
Crops, American, 10 years' aver. 373
Crown sheet, to keep clean..(14) 11
Crusher, sectional-cushioned.....*306
Cuff holder, new..... *19
Curing beef by injecting brine... 161
Curiosities at the Smithsonian in. 85
Currents of Ampere..... 244
Cutch, use of, in boilers.....(22) 155
Cutlery, American, in Sheffield.. 97
Cut-off, new.....*102
Cutting Packing Company..... 148
Cyanogen with hydrogen..... 197
Cyloscope, the.....*131

D

Daniell, a home-made..... 105
Darien Canal, the..... 80
Dairy fair, International..217, 360, 414
Dead, preservative of the..... 359
Decease of two Am. shipbuilders 49
Decisions relating to patents..346, 384
Decoys for wild fowl.....*246
Determinat'n of silver in Galena. 186
Device for sep. cream from milk *9
Devil's darning needle, the...100, 148, 194
Devil's plant, the..... 280
Dice magnetism.....(12) 91
Diet, proper, for children..... 216
Diphtheria, new way to treat.... 184
Diphtheria, treatment of..... 416
Diploma, grand prize, Paris Ex.. *63
Discoveries, curious..... * 57
Discoveries, remark'ble, Crooke's *232
Diseases, new..... 40
Disinfectants, how to use them.. 179
Dissociation of chlorine..... *177
Diving.....(12) 123
Divining-rod.....(38) 44
Do it well..... 312
Dominion exhibition, the..... 265
Double stars, colors of..... 138
Dragon flies..... 113
Drag-sawing machine, new..*21, *230
Drainage, house..... 104
Draughtsmen, caution to..... 42
Drawing apparatus, perspective...*307
Drawing tools, to protect from rust.....(38) 60
Drilling scow, United States..... *31
Durion, the..... 216
Dust explosions, law of..... 282
Dye, blue, new..... 197
Dynamite, explosion of..... (1) 123
Dynamite, force of.....(24) 11
Dynamo-electric machine.....(31) 92
Dynamometer, Edison's..... 84
Dynamometer, electrical..... 276

E

Earthquake, disastrous, in Sicily. 9
Earthquakes, depth of..... 26
Earth's day increasing..... 410
Earth's, the, magnetic poles..... 2
Easton bridge, repair of the..... 85
Eclipse of 1880..... 17
Eddystone lighthouse, new..... 145
Education, mechanical, advan. of 52
Egg holder, new.....*399
Eggs, counterfeit..... 400
Eggs, rotten, artificial..... 396
Eggs, to preserve.....(19) 417
Ejector, Friedmann's.....*319
Electrical alarm compass..... 81
Electrical balance, the..... 98
Electrical experim't, rem'kable. 166
Electrical generator, Edison's.....*242, 305, 308, 360
Electrical gyroscope.....(36) 12
Electrical test..... 296
Electricity as a motive power.... 213
Electricity, atmospheric, laws of 197
Electricity for lighthouses..... 410
Electricity for useful purposes.. 138
Electric bell circuit.....(19) 171
Electric current regulator, new..*101
Electric generator, Edison's..... 337
Electric lamp.....*274
Electric lamp for Eng. shilling..*293
Electric lamp, new..... *
Electric lamp, new form of.....*166
Electric lamp, Reynier's.....*194
Electric lamp, smoke of..... 20
Electric light.....(5) 235
Electric light, division of..... 240
Electric light, economy of the.... 186
Electric light, heat of the..... 262
Electric light in mining..... 24
Electric light in photography.... *47
Electr. light, photography by the 57
Electric light, water power for.(3) 299
Electric motor.....(29) 188
Electro-magnet, large..... 326
Electro-plating.....(31) 44
Electro-plating with copper..... 9
Elephant shrew..... *7
Elements in nature.....(26) 252
Elements, nature of..... 232
Elevated railway extension..... 273
Elevated railway nuisance..... 313
Elevated railway, Philadelphia.. 296
Elevated railways, cost of..... 310
Elevated rail's, foundation plate,*338
Elevated railways, progress of...*255
Elevators, floating.....*207
Emery wheels, solid.....(30) 43
Employment..... 21
Enamel for iron.....(33) 28
Engine for boats.....(23) 43
Engine, portable, new..... *19
Engine, power of.....(9) 75
Engine slides, wear of.....(3) 235
Engine, steam, Exeter..... *51
Engines, dead centers of.....(34) 12
Engines, power of.....(16) 251
Engines, traction, on com. roads. 191
Engineering, Am., future of..... 74
Engineering inventions..... 58
Engineers, civil, convention of.. 19
Engineer's transit, improved.....*214
England again invaded..... 266
Engraving of copper rollers..... 200
Enterprise, American..... 250
Entomological specimens.....(2) 123
Errata..... 250
Erratum..... 285
Exhibition, a novel..... 181
Exhibition at Sydney, opening... 293
Exhibition of sanitary appliances 18
Exhibition, Swiss, a..... 18
Expansion, metal.....(19) 267
Expedition to the Red Sea..... 250
Exploration of Western Asia.... 48
Explosion in a Bessemer shop.... 181
Explosive, Austrian, new..... 9
Explosives, compara. strength of 202
Explosives, modern, some..... 293
Export trade, increasing..... 413
Export trade in staves, etc..... 121
Extending its use..... 413
Eyepiece for telescope.....(14) 403

F

Faience.....*103
Faience, French.....*233
Failure, threatened, of silk crop.. 34
Fall of 260 feet, a..... 137
Famine and disease..... 245
Fan, lace.....*153
Farming, fancy, advantages of... 58
Farming implements in Morocco 33
Farm wages and cost of living.. 152
Fashion, new, foot jewels..... 395
Fat secreted by the liver..... 295
Feed pump, freaks of.....(13) 107
Fence post, iron, new.....*149
Fences, metallic..... 257
Ferry boat, big, California..... 145
Ferry boat, pig, San Francisco.... 82
Ferry boat, steam, first..... 132
Fever and ague..... 346
Filaria snake..... 66
Filters.....(20) 155
Fire, colored.....(22) 28
Fire dept. of Topeka, Kan..... 101
Fire engine improvements..... 307
Fire engines, self-propelling..... 3
Fire escape, new.....*230
Fireflies..... 49
Fire lighter, automatic, new.....*339
Fire losses..... 302
Fire screen.....*201
Fire, curiosities of..... 248
Fires, great, record of..... 264
Fires of St. Elmo, the..... 234
Fireproof partitions..... 132
Fish, a new..... 135
Fish commission, U. S..... 68
Fish, cross-breeding among..... 360
Fish culture, progress in..... 71
Fish food.....(15) 91
Fish, freezing, for winter use.... 105
Fish killed by electricity..... 412
Fish, Passaic, destruction of..... 4
Fish, transparent..... 291
Fisheries of the United States... 289
Fishes, poisonous..... 199
Fishway, new.....*275
Flange coupling, new.....*179
Flexible toys.....(7) 403
Flies, ichneumon..... 8
Flint imp'm'ts of the Aborigines 48
Floors, asphalt and timber..... 20
Flour mill, largest..... 291
Flour mill, portable..... *70
Flour mills, horizontal, French..*243
Flour mixed with min'rl substan. 154
Flour, new process..... 308
Fluorescence..... 35
Fluorescent body, new.....45, 261
Flue and tubular boilers.....(9) 11
Flying dragon, the.....*118
Flywheel explosion..... 409
Food, one day's shipments of.... 218
Foods, moral and mental effects. 201
Foot pounds, energy in..... 381
Foreign fruit trade of New York. 121
Forest trees, pruning..... 295
Forging, quick..... 243
Fork and spoon, combined..... *66
Forks, antiquity of..... 295
Fountain, discharge for.....(28) 124
Four hours in the dark..... 145
Fourth of July snow..... 49
Fourth of July..... 186
Fox, flying.....*295
Freckles, to remove.....(3) 187
Freezing by salt and ice.....(3) 139
Freezing, heat grown-off from(6) 219
Freezing in fire..... 272
Freezing mixture.....(11) 139
Frog farming..... 181
Frog, five-legged, a.....*165
Fruit, a tropical..... 49
Fruit, bearing..... 184
Fruit of shrubby trefoil..... 396
Fruit trade, foreign..... 347
Fulminate, to make.....(18) 251
Fungi in man..... 128
Fusing metals without fire..... 247

G

Game, caution about shot in..... 200
Gas exhauster governor, new..... *15
Gas lighting experiments..... 115
Gas mains, cast iron..... 378
Gas well and carbon factory..... 352
Gases pressure of.....(19) 27
Gear, compounding.....(37) 44
Gear-dressing machine.....*150
Geissler's tubes, photo. of spectra 182
Gelatine..... 115
Gelatine negatives..... 177
Gelatine plates, developing..... 395
Gelatine, purifying..... 361
General Wool monument..... 185
Generator, electrical, Edison's.. 276
Geologi. speci. from Luray cave. 80
Geranium oils, adulteration of.. 329
Geysers of the Azores..... 37
Geyser well, Kane..... 233
Gila monster.....*399
Gilt frames, to clean..22(252, (10) 239
Gildingon glass.....(5) 120
Glacial acetic acid, impurities in. 181
Glass, ancient..... 282
Glass, how old is..... 248
Glass, ruby.....(17) 11
Glass, to cut a hole in.....(18) 11
Glass tubing.....*361
Glassware, ancient.....*385
Glassware, Roman.....*311
Glossing, photos, heliotypes....(6) 43
Glue..... 6
Glue, liquid.....(1) 315
Goat antelope, Japanese.....*135
Gold and silver, imitation..... 103
Gold and silver, year's product.. 377
Goldbeater's skin.....(16) 107
Gold, to extract.....(4) 107
Gold, to reduce.....(25) 43
Good sign of the times, a..... 49

© 1879 SCIENTIFIC AMERICAN, INC

Gopher trap wanted 4
Governors.....(4) 75
Grain trade of New York.....*208
Granite ware.....(9) 139
Grape rot, the..... 167
Great Eastern, horse pow. of.(24) 172
Grinding, high and low 308
Grinding mill, improved.....* 83
Gum copal 400
Gun barrels, to blue...(20) 287, (23) 403
Gun, great, new..... 86
Gun, hammerless.....*411
Gun. magazine, Hotchkiss'.... , 259
Gun, the Thunderer's.....*130
Guns, powerful..... 265
Guns, power of..... 264
Gutta percha, to dissolve.....(9) 43
Gypsum casts. manufacture of... 21
Gyroscope, electrical.....(36) 12

H

Hair restorative... .....(20) 300
Hair, tonic for .....(32) 172
Hair, treatment of the..... 312
Hard rubber, cement for.....(4) 283
Harris- Corliss engine.....*175
Havana, the pest-breeding place, 115
Hay fever..... 200
Haymaking, artificial.....*358
Health Association, American... 336
Health at home..... 416
Health, the way to..... 329
Healthfulness of London..... 22
Heat.....(9 267
Heat in the Comstock mines..... 272
Heat, specific.....(15) 27
Heating metals in vacuo..... 155
Heating, horse cars, plan for. ... 393
Hectograph ink.....(14) 347
Hedges. white willow..... 215
Hog cholera..... 339
Hoister, 1,500 horse power..... 117
Holes in hard steel 102
Hop, a substitute for..... 396
Hop plant, use of the..... 87
Horn, to color.....(3) 283
Horn, to stain.....(10) 283
Horse-clipping machine, new.....*210
Horse crazed with tea, a... 231
Horse detacher, new *378
Horsnails, machine-made..... 88
Horse-power rent.....(6) 107
Horses, unshod..... 5
Hose coupling, improved..... *16
Hose nozzle, new.....*395
Hose pipes..... 323
Household perils..... 411
How business is now done..... 58
How to print letters 82
Hughes' micro. and Blake trans.. 360
Human voice, the..... 167
Humming bird's nest, a..... 118
Huxley on pluck and endurance.. 169
Hydrants, winter precautions for 396
Hydraulic ram.....(20) 188, (8) 251
Hydraulic ram, new.....*262
Hydraulic ram, power of.....(17) 252
Hydriodic acid..... 5
Hydromotor..... .....*223
Hydrophobia successfully tre'd... 144
Hygienic effects of air..... 85

I

Ibex, the *359
Ice boat propulsion..... 340
Ice boats sail faster than wind. .. 381
Ice box, to make.....(1) 43
Ice breaker, new.....*58
Ice caves of Teneriffe..... 308
Ice in the Arctic regions.. 345
Ice, medicated..... 248
Ice yachts, speed of..... 309
Ichneumon flies..... 8
Illustrating inventions 321
Incident of the times, an..... 245
India rubber, how obtained 210
Indians as farmers..... 402
Induction coil..(24) 92, 235, (22)283, 338
Induction coil, exciting an 399
Induction coil for telephones (14) 91
Industrial art in New York . . . 9
Industrial distress in England... 106
Industrial education, Huxley on. 111
Industrial enterprise in Califo'ia. 32 9
Industrial progress, recent..... 1 0
Industries, Amer...273, *303, *340, 357
Industry, Amer., a decayed..... 224
Inflammable goods, a ban on..... 353
Ink, blue.....(7) 43
Ink for copying pads..(5) 315, (21) 403
Ink for greased leather.....(2) 107
Ink, printing, quick drying....(24) 403
Ink, Japan.....(3) 27
Ink, official..... 276
Insects, giant..... 199
Insects killed by fungi..... 343
Insects, to kill.....(15) 171
Insects, to preserve.....(5) 11, (17), 347
Instrument for ringing swine....*147
Intelligence, vehicles of 340
Intelligent workmen needed..... 144
Intercourse, ancient, with China, 9
International dairy fair..... 154
International fishery exhibition.. 100
International park at Niagara... 257
Invention, the basis of..... 266
Inventions..... 172
Inventions, agricultural...164, 249, 260, 296, 323, 361
Inventions, agricultural new..41, 84
Inventions, agri., recent...99, 185, 231
Inventions, engineering.10, 58, 83, 98, 121, 137 153, 163, 184, 246, 262, 278, 291, 330
Inventions in China..... 192
Inventions, mechanical...132, 151, 164, 194, 214, 226, 242, 259, 274, 297, 307, 323, 346, 358, 381
Inventions, mechanical, recent... 5, 19, 36, 66, 90. 101, 118
Inventions, miscellaneous..22, 39, 88, 102, 116, 134, 146, 168, 181, 198, 210, 230, 243, 263, 275. 294, 306, 325, 338, 357, 378
Inventions, recent, a few..... 310
Inventions, recent, some..... 340
Inventor and manuf., successful. 37
Inventor, an early, experi. of 341
Inventors, how to discourage.... 277
Iodine as a substitute for quinine 183
Iron as a fertilizer..... 324
Iron castings, to blacken... ... (20) 203
Iron trade, activity in the..... 113
Iron trade, notable feature in.... 193
Irradiation .....(23) 417
Ishmail Pasha 89
Is it education or accident? 121
Is it paying?..... 133
Island of Ferdinando de Norbona 292
Isthmus ship transit..... 224
Ivy poisoning..... 256

J

Japan varnish..... .....(19) 403
Jelly and jam..... 90
Jewelry, electric.....*263
Jew's ear fungus..... 209
Joinery, mach. made, export'n of 37
Journal box, to Babbitt.....(30) 2 04
Journals, to prevent, heating....*323
Jupiter, changes in appearance.. 397
Jupiter, the spot on..... 216
Jute, American..... 202
Juvenile prodigy, another..... 98

K

Kansas whirlwind..... *1
Keeping the boys on the farm.... 312
Keep the mouth shut..... 209
Keys, ancient..... *25
Killing flies with gunpowder..... 164
King Cotton 399
Knowledge, value of..... 326
Krupp of Essen..... 170

L

Labor at home and abroad..... .. 113
Labor, free, in the south..... 36
Lacquer..... .....(9) 27
Lacquer, brown.....(26) 267
Lake Erie vineyards..... 414
Lamp, electric, new..... *4
Lamp electric, smoke of..... 20
Lamp, phosphorescent .....(14) 27
Language origin of..... 282
Lard, to harden.....(34) 204
Lathes, milling attachment for.. *38
Latin and Greek, study of..... 105
Launch, steam, of light draught.. 249
Lead pipe, protecting..... 3
Lead oxide, to reduce..... ...(16) 417
Leaky boi er tubes, to stop... (21) 283
Leather belting, advance in..... 393
Leather in belts, how to judge of. 376
Leather factory, Howell & Co.'s.*407
Leather from bison hides..... 400
Leather, manufacture of.... 413
Leather, to harden.....(5) 299
Leather, to stiffen.....((2) 27
Lens, grinding.....(9) 403
Lenses.....*159
Lesseps and the canal..... 178
Letter boxes, electrical... 116
Letter press, lock *117
Letters patent..... 362
Life, long, to attain 111
Life, the science of..... ... 47
Lift locks and locking time..... 161
Lighting the Capitol by electric.. 25
Lightning arrester.....(14) 59, (5) 91
Lightning, inductive action of.... 116
Lightning, protection from..... 272
Lightning rods.....(20) 59, (22) 155, 234
Lightning rods, locating..... 112
Lime juice *vs.* alcohol 42
Lime water.....(2) 75, (33) 108
Linen company, Willimantic.....*351
Linen, to starch.....(7) 315
Live stock, abuse of..... 309
Living, cost of 138
Lobsters for the Pacific coast.... 55
Locomotive engine driving..... 382
Locomotive, lifetime of a..... 69
Locomotive without water. .. 241
Locomotive, the..... 310
Locomotives, fireless..... 379
Locomotives, great, of Erie R. R. 311
Logs, a big jam broken 130
Longevity, comparative 10
Longitude of the United States.. 86
Lotus, the, in New York..... 243
Lumber district, prosperity in the 182

M

Machines, drying *162
Maciobiotics and eubanics..... 328
Madder, artificial 232
Magic lantern, reflecting..... 64
Magnetism and electricity..... 201
Magne'm, prac. exp. in, *195, *211, *227
Magnetized watch, a 19
Magnetizing molten iron..... 2
Magnets.....(17) 27
Magnets, electro poles of.....(23) 11
Magnets, enfeeblement of.....(1) 11
Magnets, steel for ...., ...(17) 139
Magnets, winding of.....(6) 235
Magnetometer, new..... *99
Mails, disinfection of..... 250
Manganese bronze..... 21. (5) 219
Manufactures of the West..... 233
Mara, the..... *23
Marrow in bird's bones.....(16) 171
Masters and apprentices..... 356
Mastodon, discov. of another.... 49
Material, quantity of, in build ... 26
Mead, to make..... (11) 27
Mechanics, amateur.....*20, *54, *95
Medical photography..... 5
Meerschaum .....(35) 172
Meerschaum, to polish.....(1) 107
Megascope, Dr. Cresson's..... 63
Melodiograph, the..... 166
Memory, a singular..... 145
Memory, concerning the..... 247
Memphis, purification of..... 260
Menhaden fish guano..... 344
Mental operations, photo. of.... 214
Meridian circle, the *111
Metallurgical process, Hollway's. 115
Metal spinning..... *95
Metals, fusible.....69, 186
Metals, new, two more..... 185
Metals, rare, price of..... 386
Metals, transparency of..... 149
Meteorite, a, in Iowa... 86
Meteors, August 137
Meter, water, new..... *34
Metric system, basis of.....(15) 2 5
Metric, the, in Philadelphia..... 297
Microphone, to make.....(27) 284
Microscope, magnify. pow. of.(18) 139
Microscope in the witness box.... 326
Mildew bronze, imitation of...(5) 331
Mildew proof for fabrics.....(6) 331
Mildew, to remove..... ....(25) 28
Milk, skimming..... ....*178
Milk, testing, new method.... ... 346
Mill, an improved..... * 54
Miller, American *vs.* British..... 150
Mineral oil for lighthouses..... 410
Mining tunnel, Colorado..... 362
Minneapolis as a milling center.. 340
Mirrors, silvering..... 385
Mississippi jetties finished..... 49
Mississippi jetties, work on..... 240
Mississippi river commission.... .. 161
Missouri river, the..... 42
Miter cutter, new.....*134
Molecular chemistry..... 120
Monsters, ancient, some..... 247
Moth, house-builder.....*343
Motive power, England's..... 241
Motor and meter, new.....*278
Motor, tramway, new.....*354
Mount Hood smoking..... 8
Mowing machine, canal..... 148
Mucilage .....(27) 12
Muffling contriv., Harrington's.. 339
Multiplication, abbreviating..... 184
Mushrooms, poison 23
Musical instrument, new.....*342
Music of the spheres, the..... 169
Musta .....(9) 187

N

Nails, names of.....(11) 91
Nails, sizes of.....(36) 28
Narica, the *87
National Academy..... 320
National exhibitions..... 396
National Museum, the..... 281
National Public Health Associa.. 353
Natural history notes. ...55, 71, 135, 231, 328, 359, 583
Navy yard, Brooklyn..... 86
Nearsightedness 361
Negatives on paper..... 131
Nets, to preserve.....(1) 331
Nevada saline valley, a..... 136
New York Academy of Sciences.. 393
Niagara river, sounding 193
Nickel and cobalt, malleable..... 36
Nickel plating..... (3) 11
No favoritism—no presents..... 48
Non-conductor of heat.....(13) 251
Nordenskjold's discoveries..... 258
Nordenskjold's expedition..... 113
North northwest, the..... 16
Northwest passage..... 177
Notes and queries....11, 12, 27, 28, 43, 44, 59, 60, 75, 91, 92, 123, 124, 155, 171, 187, 188, 203, 204, 219, 234, 235, 267, 363, 364, 387, 388
Nut lock, improved..... *86
Nuts 129

O

Obelisk, Egyptian, for New York, 273
Obituary:
Boyden, Uriah A..... 296
Bigelow, Erastus Brigham.... 409
Carey, Henry C..... 296
Chenu, Jean Charles 379
Cooke, Sir Wm. Fothergill.... 48
Crawshay, Henry..... 409
Dale, Thomas N..... 80
Favre, Louis..... 113
Hill, Sir Rowland..... 161
Le Moyne, Dr. F. Julius..... 296
Maxwell, James Clerk..... 321
Miers, John..... 379
Rogers, Henry J..... 160
Sarony, Oliver..... 209
Weber, Albert..... 40
Objective, 32-inch, Russian..... 249
Objects of study, the..... 168
Ocean curr. at St. Paul's Rocks.. 84
Ohm..... .....(12) 283
Oil cabinet, improved.....*382
Oil, to remove gum from.....(6) 123
Oil well, volcanic 167
Oils, extraction of..... 225
Oleander, the..... 280
Olives in California..... 149
One more number 393
Onion-smut, Ameri., in France.. 113
Oaks and pines.....(1) 75
Opening of the Mississippi... 64
Optical delusion .....(2) 187
Optical delusion, explanation....*133
Optical delusion, new..... *85, *133
Ore smelting at Leadville..... 249
Organ, largest in the world..... 385
Oriental sand and mud baths..... 320
Ornaments, bog oak..... 178
Otooyon, the.....*231
Otter, the *327
Our ferry traps 165
Oxygenating water.....(21) 252
Oxyhydrogen blowpipe.....(8) 403
Oxyhydrogen light.....(19) 27
Ozokerite or mineral wax..... 153

P

Pah-gosa Springs, Colorado..... 16
Paint for iron.....(33) 204
Palissy plate..... .....*263
Palmetto fiber for paper..... .. 35
Palm oil 399
Panama ship railway, proposed.. 160
Paper, albumenized..... 261
Paper collars, arsenic in..... 149
Paper from grass 311
Paper-makers' association..... 113
Paper, splitting..... 6
Paper, to render, acid proof...(25) 403
Paper trade, export..... 244
Paper, water and fireproof..... 326
Paper, wrapping, preservation of 36
Papier mache .....(11) 267
Paradox, a little..... 12 8
Parrot fish, great American..... *23
Parrot speech 87
Passenger car, steam..... 393
Paste, good..... 276
Patent law, international..... 217
Patent law, New South Wales.... 192
Patent laws..... 224
Patent laws, improved..... 292
Patent laws, policy of the..... 225
Patent lawyer, lady 218
Patent right discussion in Eng... 2
Patent your inventions abroad... 176
Patents, American recent..... 4, *18, 35, 50, 247
Patents, Cochrane, defeat of.... 17
Patents, decisions..... 277
Patents, decisions relating to.... 84
Patents, recent decision..65, 106, 122, 200, 218, 245
Pavement rammer, steam.....*294
Pearl fisheries of Ohio 100
Pencil, new, as a sub. for ink.... 228
Pencils to write on glass, etc. . 298
Pennsylvania R. R., how insp'td. 342
Pens and pencils, manuf. of.....*303
Pens, machine made, origin of... 356
Pens, water.....(29) 12
Petroleum..... .....88, 292
Petroleum as a steam maker..... 42
Petroleum business 233
Petroleum industry..... 394
Petroleum in steam boilers..... 18
Petroleum, July product of..... 149
Petroleum tank, lining for... (34) 108
Petroleum, waste of..... 282
Phonograph spring..... ....(26) 92
Phosphate of potash..... ... 51
Phosphorescence of beef.....(1) 219
Phosphorescence of the sea..... 166
Phosphorescent powders..... 9
Phosphorescent substances..8 (1) 27
Phosphoreted hyd'n, to make.(5) 283
Photo-collographs, printing..... 260
Photo-decoration of metals..... 262
Photo-plates, gelatine..... 197
Photo-printing, carbon..... 111
Photo-printing process, new. 261, 395
Photo-typie, new process of..... 104
Photographic patterns..... 111
Photographic rifle..... 25
Photographing rapid..... 161
Photographs, spirit, Hedley's.... 81
Photography by the electric light 57
Photography, changes in..... 81
Photography, electric light in.... *47
Photography in natural colors, . 260
Photography in wood engraving 240
Photography, medical..... 5
Photography of flashing signals . 259
Phylloxera, the, in France..... 72
Physical science, philosophy of... 307
Piano and organ factory, Beatty*391
Pianos and organs, manufacture. 396
Pier, Coney Island..... ... 37
Pier, new, at Long Branch..... 37
Pigeons, carriage..... 6
Pig iron, dephosphorizing..... 111
Pigs, how to medicate..... 329
Piles, dry.....(25) 12
Pilot boat Hercules, steam.....*394
Pilotage, steam..... 377
Pine cones for fire kindling..... 260
Pin factory, visit to a..... 261
Pipe line, new..... 229
Piston rod packing, new..... *98
Planer, heating of .....(17) 299
Planets, position of.....(11) 11
Plants, colors of..... 216
Plants, cross-breeding..... 16
Plants, self-defense among..... 7
Plaster of Paris, to harden....(27) 300
Plate, wet, to keep a..... .....(2) 27
Plating, silver.....(2) 27
Plating, striking bath.....(4) 27
Plating with nickel and silver.(21) 203
Platinum in California 138
Platinum in the U. S 177
Platinum, to dissolve..... .....(28) 267
Pliocene man in California..... 314
Plowing by electricity..... *41
Plow, mammoth..... .....*294
Pluck and industry..... ... 89
Plumb and perpendicular.....(2) 91
Pneumatic clock..... ..... *5
Pneumatic cushions for elevat... 17 0
Pocketbook, recording.....*246
Poison, antidote to..... 147
Poison for rats and mice..... 40
Poison ivy, antidote to..... 215
Poison mushrooms..... 23
Poisons, arrows..... 280
Poisons, solonaceous..... 88
Polar expedition, American..... 48
Polar expedition, new British.....*183
Polar pantograph, the..... *66
Polar sea, Siberian, naviga. of... 379
Polarization of batteries.....(7) 343
Polyphemus the..... 306
Pompano, a remarkable..... 218
Porpoises and gulls..... 280
Portable engine, new..... *19
Postage stamps, how printed.(13) 11
Potassic iodide, to estimate..(16) 91
Potato digger, improved..... *66
Potters, Amer., congress of..... 411
Powd'd substances, pressure on. 154
Powder-post insects.....*261
Powders, luminous..... 248
Power, transmission of.....(31) 204
Precision, instruments of..... 386
Preserve your papers..... 289
Press, a new.....*166
Press, machine and pro., Jones'.. *22
Press, oak, Gothic..... .....*185
Pressing machine, improved..... *82
Pressure, effects of 234
Printers' rollers..... (14) 139
Printing telegraph, octo-plex.... 306
Prism, to fasten together.....(8) 27
Produce, Am., exported to Scot.. 52
Professional men, advice to..... 314
Prof. Archibald Giekie..... 145
Progress at Menlo Park *52
Progress, recent, in Soudan 266
Projectile, military, new..... 360
Projectile, new..... .....*395
Projectiles, penetration of.....(2) 11
Promptness and courage a boy's 96
Propeller.....(32) 60
Propeller screw, new..... *130
Propellers, arms of.....(8) 219
Propelling apparatus, new..... *38
Prosperous times, signs of. 52
Protagon..... 226
Pruning and grafting implement*398
Pulleys.....(22) 417
Pulleys, arms of.....(7) 219
Pump, boiler feed, improved.....*150
Pump, rotary, novel..... *6
Pumps, chain, improvement in..*379
Pumps, duty of .... (11) 107
Punch and shear, combined. *194
Punching and shearing press....*179
Purification of water..... 25
Puzzle for future geologists 308

Q

Queen, office of the..... 279
Questions, a string of..... 324

R

Railroad lock portable, imp..... *118
Railroad tie, new..... *88
Railroads, narrow gauge..... 184
Railroads of the United States.... 145
Railway bridge for Niagara river 121
Railway bridge, steel, new..... 32
Railway cars, cost of..... 209
Railway, electrical, an..... 71
Railway making, progress in..... 181
Railway, Mexican, new..... 232
Railway notes..... 36
Railway risks..... 55
Railway signals .....(15) 267
Railway sleepers, glass..... .. 201
Railway speeds..... 199
Railway speeds, European..... 115
Railway traveling, French..... 277
Railway wheel, a runaway.... 121
Railway, wooden, thousand do ll. 17
Railways, ballasting for..... 414
Railways, life of..... 411
Railways, Rocky Mountain..... 89
Rainfall and forests 312
Rapid transit in New York..... 16
Rat and mice exterminator..... 149
Rats and mice, poison for..... .. 40
Rattlesnake bite, alleged cure for 74
Razor strops.....(25) 108
Reading at 7½ miles..... 145
Reading, good, for our sons..... 409
Reading, profitable..... 326
Reading room, British Museum.. 361
Red Sea, where did Israel. cross .. 354
Relief printing, brilliant..... 282
Religious belief *vs.* epidemics.... 182
Resistances, measuring.....*385
Resuscitation, instrument of..... 20
Revenue stamps, poisoned by.... 167
Rheostat..... ..(10) 403
Rheostat, a cheap.....*(10) 187
Rheostat, improved.....*147
Rifle, photographic..... 25
Ring spinning.....(28) 108
River, hot water, a..... 393
River, Manchester and Liverp'l.. 354
Roadmasters' difficulties..... 321
Rock crystal lapidary in Japan... 298
Rocks, traveling 88, 292
Rollers, ink, to make..... .(26) 28
Roofs, leaky..... .....(31) 28
Roofs, leaky, to stop.....(6) 139
Ropes, strength of..... (7) 75
Rose tree, the ancient..... 136
Rosin, to bleach.....(32) 92
Rotary motion..... .....*216
Rotary pump, novel *6
Rules of the Nat. Board of Health 100
Rum drinkers, children of..... 105
Russian fairs..... 170

S

Saccharometer, Balling's..... 329
Sad iron and fluting roll. comb'd.*102
Safety valves, weight on .....(17) 188
Salicylic acid..... 298
Salt product of New York..... 384
Sandal wood..... 97
Sand box tree, the..... 168
Sandpaper, to make.....(17) 171
Sanitarium, Holloway..... *215
Sanitary appliances, exhibt'n of.. 18
Sanitary Capt. Eads wanted, a.... 97
Sanitary conventions in Michigan 339
Sanitas..... 290
Saw blades, to braze.....(22) 300
Sawdust, to utilize..... 377
Saw gumming, improvement in.. *86
Sawmills wanted in Brazil..... 150
Saws..... 344
Scaffolding screw..... *134
Scale in boilers.....(36) 60
Scarus Inacamaia..... *23
Science as applied to tanning..... 392
Scientific Amer. as an educator.. 376
Scientific American for 1880.... .. 409
Scientific American in Italy..... 97
Scientific American in Turkey.... 401
Scientific credulity..... 3
Scientific lecturer, oldest..... 145
Scovill Manufactur. Co.'s works.*375
Scow, drilling, United States.... *31
Screw driver, improved..... *358
Screws, to nick.....(2) 267
Sea cow, great, of Florida..... *279
Sea level changes..... 168
Sea lion, baby..... 57
Sea serpent, the great *415
Sea sickness, new theory of..... 202
Sea water in chronic catarrh..... 233
Sea weeds as food..... 384
Sealing wax.....(25) 267
Seeds..... 328
Seeds of camelia japonica..... 35
Shad and striped bass, Lake Ont. 384
Sharple boat.....(15) 387
Shearing and riveting machinery..*259
Shingles, machine for making... *22
Shipbuilding, progress of..... 164
Ship canal, Maryland..... 326
Ship of the future 225
Ship railway at Panama..... 68
Ship railways..... 144
Ship, swiftest, in the world..... 185
Ships, capacity of.....(37) 60
Ships, refrigerating, fallacy of... 129
Shoe patterns, glass..... 193
Should investigators be teachers? 297
Show bottles, brill. purple for.... 386
Signals, steam jet..... 332
Signaling instrument, electrical.* 395
Silicate of soda, to thin..... .(3) 403
Silk, allantus 232
Silk crop, threatened failure of... 34
Silk, incendiary..... 320
Silk mills, English in N. J 181
Silkworm, the best kind to rear.. 118
Silk, vegetable..... 295
Silks, assay of 402
Silks, stuffed, spon. comb. of..... 229
Silver deposits of Leadville, Col. 32
Silver mines of Arkansas..... 185
Silver-plated ware, manuf. of ...*296
Silver plating .....(4) 219
Silver, to separate, from lead..(8) 59
Silvering glass .....(7) 123
Silvering glass, improvement in.. 329
Silvering mirrors 234
Simplon tunnel..... 201
Siphon for mines.....(21) 171
Siphon, vacuum, in.....(17) 403
Skins, to soften .....(8) 315
Slag boiler covering..... 361
Sleeping-car berth, improved....*307
Smelting contract, a large..... 105
Smoke, consumption of..... 105
Smoke, the, of an electric lamp.. 20
Smokestack, paint for.....(29) 300
Snowballing in July..... .. 153
Snow storms in India, remark... 330
Soap, hard..... (36) 108
Soap manufactory views of.....*335
Soap mine, natural... 74
Soap, soft..... .....(4) 299
Social Science Association...193, 218
Sodium, spectrum of..... 23
Solar spectrum, new map of the. 136
Solano, largest ferryboat..... .. 414
Soluble glass .....(24) 252
Sorghum in the West..... 393
Sound, velocity of.....(36) 44
Sound waves..... 397
South America, extension of..... 208
South Pass, great shipenters..... 321
Spar torpedo vessel Acheron..... *69
Speaking, public, on..... 25
Specimen, singular..... 415
Spectacles, use of, delayed..... 244
Spectroscope, powerful..... 25
Spectroscopy, progress in..... 65
Spectrum of sodium..... 23
Speeds, fast..... 266
Speed of ice yachts..... 288
Spheroidal, cond. in boilers....(22) 43
Spiderson red roses..... .. 161
Spindle, an improved *327
Spines of the cactus, invisible.... 186
Splitting paper 6
Sponge gathering..... 383
Spontaneous combustion..... 6
Spontaneous ignition..... 178
Spot on disk of Jupiter.....*180
Springs.....(36) 172
Stable, improved, for horse railw. 99
Staining pine..... ... 170
Stains, nitrate of silver.....228, 260
Stains, to remove, from hands (2) 139
Stamp mill, powerful..... 298
Starch, explosion of..... 151
Stars, immensity of the..... 330
Statistics, immigration... 164
Statuettes, to metallize... .....(2) 43
Steam catamaran .....(30) 108
Steam engine, economical..... 25
Steam engine of the future..... 10
Steam fitters, a few words to..... 179
Steam fitter, young, hints to.... ..*355
Steam heating in Troy..... 164
Steam heating surface.....(1) 235
Steam heating, the Holly system.*114
Steam jet in smokestack.....(15) 11
Steam launch.....(5) 59, (19) 124
Steam on Penn. canals..... 412
Steam rammer for paving..... 166
Steam supply pipe .....(16) 59
Steam vessels, inspection of... .. 413
Steam whistle, improved.....*117
Steam whistling, Peculiar..... 33
Steamboat, small.....(31), 108, 324
Steamer, coastwise, largest..... 345
Steamer, Cunard, new..... 358
Steamer, small .....(28) 92
Steamer, small sidewheel.....(27) 108
Steamer, small stern-wheel....(27) 92
Steel..... 200
Steel armor plates, inefficiency of 169
Steel, Bessemer..... *127
Steel, compressed..... 378
Steel, Damascus, manufacture of 88
Steel, hardness of 26
Steel, magnesium..... 52
Steel, to anneal.....(21) 300
Steel, to blue.....(1), 155 (12), 171
Steel, use of, for bridges..... 337
Stereotype composition, new..... 314
Stereotyping, paper process....(9) 331
Still, small, to make.....(18) 91
Stinging tree, the 42
Stone, a large block of..... 3
Stone-dressing tool, new.....*414
Stone varnish, Browning's..... 102
Stoneware, to cut.....(24) 108
Stock car, reward for..... 304
Stock yards, Chicago..... 329
Storehouses, refrigerated..... 201
Stovepipes, improvement in.....*262
Stoves, American, in England.... 360
St. Paul as a milling center..... 260
St. Petersburg as a seaport..... 98
Straw cutter, improved.....*118
String telephone.....(3) 267
Stripping solution.....(4) 251
Subject for investigation, a 112
Success, American, reasons for.. 288
Suez Canal..... 209
Sugar from corn .....(15) 155
Sugar from sorghum..... 385
Sugar, how it is refined..... 386
Sugar, sweet potato..... 295
Suggestions for discussion..... 250
Sulphides as fuel in metallurgy.. 153
Sun dance of the Sioux..... 106
Sun, the, a source of power.....*67
Sun's, the, radiant energy.....*53
Supervision 97
Swamp, great, reclaimed..... 40
Sweeper, new..... *339
Swelled trunk palm, the.....*151
Swift's comet..... 17, 49
Swim, a difficult..... 136
Swiss Exhibition, a..... 18
Sydney Exhibition.....145, 224
Systeme Sebillot, the..... 97

T

Table salt an aperient..... 416
Tadpoles..... .....*343
Tags..... 402
Tamarind, the.....*215
Tannic acid in boilers.....(9) 59
Tanning materials, new..... 416
Tanning process, new..... 234
Tape worms in eggs..... 217
Taps, machine threads, on....(10) 75
Tarsier, the..... ..*247
Tar varnish.....(5) 139
Tea culture, prospects of..... 3
Tea roses, failure of..... 129
Technical science in New Zeal'd. 192
Telegraph cables, ocean..... 330
Telegraph, electro-chemical..(17) 139
Telegraph line, resistance of..(10) 139
Telegraph mine, old..... 130
Telegraph mine, the old..... 56
Telegraph, probable uses of the.. 326
Telegraph station, highest..... 225
Telegraphic igitation..... 66
Telegraphic system of the world. 262
Telegraphy in France..... 362
Telephone..... 337
Telphone call.....(23) 200
Telephone, Edison's latest.....*198
Telephone experiment.....(10) *91
Telephone, hearing lightn'g thro 80
Telephone, as lightn'g indicator 32
Telephone, new.....*410
Telephone, universal..... *4
Telephones, current in 20, 171
Telephoning, long range..... 409
Telescope and hearing.....(21) 27
Temperature of water supply.... 224
Temper *vs.* health..... 265
Texas, future of 85
Therapeutic agent, new..... 262
Thermometer, metallic *163
Thick-thighed walking stick..... *7
Thoughts, gloomy..... 401
Thrashing machine, new..... *70
Tides, underground..... 241
Tidewater pipe company..... 21
Tile factory, Chinese..... 86
Timber, building, diseases of.... 3
Timber in the English colonies .. 183
Timber, osage orange.... 413
Timbuctoo 401
Time-pieces, trade in..... 106
Toadstool poisoning..... 229
Tobacco..... 412
Tobacco, cotton, corn, and wheat 402
Tobacco pipes in Germany..... 164
Tobacco, substitute for.....(26) 43
Tomato plant, juice of..... 168
Tongs, hardening, improved.....*398
Tools, care of..... 326
Tornadoes, great..... 74
Tornado of Apr. 14, '79, Missouri. 151
Tornelia..... .....*71
Toronto Exhibition..... 97
Torpedo boats, fast..... 379
Torpedo catcher, the..... 310
Torpedo experiments, new.....*257
Torpedo, Lay, the..... 249
Torpedo vessel, French, new 34
Torpedoes, clearing harbors of 202
Tortoise shell. 244
Tortoise shell, to solder..... 382
Towboat, Western..... 352
Towing, steam, on the canals.... 276
Towing, steam, on Erie canal.... 360
Tracing apparatus, Pratt's.....*385
Traction engine, novel.....*382
Trade, balance of, in men..... 128
Trademark decision, a..... 352
Trademark law, new..... 413
Trademark, value of a..... 98
Trademarks..... 172, 413
Trademarks, registration of..... 376
Trademarks, stamps for..... . 409
Trade, revival of..... 402
Trade with England, our..... 218
Tramway, self-laying.....*163
Trance, a long..... 25
Transfer ornaments.....(9) 235
Transit instrument, new form of. 182
Transmitter, Blake..... *274
Transmitting motion, device for*166
Treadle motion, novel..... *394
Treasury, fortifying the..... 100
Tree, giant..... .....*135
Tribute, handsome, a..... 353
Tubular piles.....*147
Tug coupling, improved..... *34
Tuning fork, resonant..... *293
Tunnel, Hudson river..... 240
Tunneling, good..... 402
Turbine tests, Holyoke..... 336
Turbines, American, in Peru ... 394
Turbo shells and sea beans 148
Turtle, an aged. 7 3
Tying-in machine.....*398
Typhoid fever..... 58
Typhoid fever from diseas, meat. 200

U

Upholstery, to clean.....(6) 299
Uranium in California..... 413
Uralium, a new metal..... 154

V

Vacuum as an insulator.....(2) 219
Valve, travel of ....(16) 267
Valves, manufacture of..... *79
Varnish for violins.....(3) 251
Varnish, retouching..... 149
Vases, bronze, Japanese *217
Vegetable curiosity, a..... 149
Velocipede, new..... .....*338
Velocities, high wind..... 312
Vessel, torpedo, French, new.... 34
Vessels, small, for war..... 35
Village, moving, a 394
Vinegar, manufacture of.. ...(22) 171
Vines, American, in France..... 144
Violin varnish and stains.....(12) 331
Virginia's oyster trade..... 164
Volcanic products of the Pacific. 359
Volcanoes, active, in Java..... 5
Volcano of Agua, ascent of the.. 170
Voyage, a rapid..... 129

W

Wages and prices in Belgium.... 152
Wages and prices in France..... 152
Wages and prices in Germany.... 276
Wages and prices in Gt. Britain.. 298
Wagon hardware trade..... 358
Walking stick, thick-thighed. *7
Walnut, to stain.....(5) 267
Wapiti, the..... 383
Wash basin valves, improved..... *35
Wash for brick walks..... ...(3) 331
Washing crystal..... .....(13) 123
Washing powders..... 282
Waste 289
Waste lands, utilization of..... 90
Watch, a magnetized..... 18
Water, bad, in Baltimore..... 241
Water, compressibility of.....(6) 59
Water, compression of.....(7) 91
Water, drinking, contamin'n of.. 16
Water for industrial uses..... 224
Water, hard *vs.* soft..... ....69, 89
Water, impure..... 248
Water meter, new..... *34
Water, pressure of, in pipes...(6) 11
Water, purification of..... 25
Water supply of Philadelphia.... 304
Water supply of Phila., future.. 381
Water supply pipes .....(26) 188
Water, to purify.....(12) 43
Water, to test.....(21) 43
Water tower, the 24
Waterproof blacking..... ....(7) 331
Waterpoof coating paper ves..(11) 251
Waterproofing packages.....(13) 123
Waterwheel, improved..... *35
Wax, to toughen.....(3) 315
Wealth, the way to..... 35
Weather, gloomy..... 401
Weather theory, new..... 181
Welding..... 25
Well, deepest in the world..... 230
Western Union Telegraph..... 312
Whale and the grampus.....*167
Whale, finback, in N. Y. harbor.. 66
What to do next winter..... 80
What to teach 262
What we are doing..... 346
Wheat, cheap..... 228
Wheat crop of 1879..... 384
Wheat, how raised in Dakota.... 402
Wheat raising in the South..... 170
Wheat, reaping 20 sq. miles of 198
Wheels, vehicle, large *vs.* small.. 56
Whirlwind, Kansas *1
Whooping cough, cause of.....*397
Wicks, incombustible.....(35) 28
Will it pay? 17
Winding up a horse..... 165
Windmill, new.....*291
Window glass trade..... 313
Winds, cause of.....(18) 27
Wine.....(28) 188
Wire covering machine.....(21) *124
Wire, experiments with..... 250
Wise, Prof., death of, probable.. 276
Wire, resistance of.....(8) 267
Wire rope transportation..... 40
Wire, strength of .....(15) 139
Wire, to cover.....(10) 251
Wire, to insulate.....(39) 44
Women and girls in Eng. mines. 330
Wood finishing, suggestions on.. 42
Wood, incombustible..... 103
Wood manuf. names wanted..... 399
Wood polish.....(20) 403
Wood pulp making..... 243
Wood, rotten, as a pest breeder.. 99
Wood stains..... 147
Woodcock, singular habit of... ..*383
Wooden railway, thousand dol.. 17
Worcester free institute, the.... 128
Work and wages in Lowell..... 313
Workmen, more needed..... 293
Work table implement, novel... ..*118
World's fair, proposed..... 377
Woven fabrics, strength of, etc. 408
Wrench, a new.....*278
Writing telegraph, the..... 90

Y

Yarn, to soften .....(23) 252
Year, successful, a 244
Year's progress, a..... 408
Yellow fever.....154, 160
Yellow fever, disinfection of..... 184
Yellow fever, Stille on 112

Z

Zincography.....(12) 235
Zinc, to purify..... ....(4) 187
Zoological collection, Cen. Park.. 17
Zoological gardens for N. Y..... 256
Zymotic contagion 416

© 1879 SCIENTIFIC AMERICAN, INC

IMPORTANT BOOKS
FOR
SHEET METAL WORKERS.

The Sheet Metal Worker's Instructor for Zinc, Sheet Iron, Copper, and Tin Plate Workers, and others; Geometrical Problems; Practical and Simple Rules for describing the various Patterns. By REUBEN H. WARN. Tin Plate Worker. With Boiler Making, Mensuration of Surfaces and Solids, Rules for Calculating the Weights of Different Figures of Iron and Steel, etc. Elaborately Illustrated. 8vo.....$3 00

A Practical Workshop Companion for Tin, Sheet Iron, and Copper Plate Workers; containing Rules for Describing various kinds of Patterns used by Tin, Sheet Iron, and Copper Plate Workers; Practical Geometry; Mensuration of Surfaces and Solids; Tables of Areas and Circumferences of Circles; Japans, Varnishes, Lacqers, Cements, Compositions, etc. By LEROY J. BLINN, Master Mechanic. 100 illustrations. 12mo..... $2 50

Galvanized Iron Cornice Worker's Manual, containing instructions in laying out the different Miters, and making Patterns for all kinds of plain and circular work. Also, Tables of Weights, Areas, and Circumferences of Circles. By CHAS. A. VAILE..$5 00

☞ The above or any of our Books sent by mail, free of postage, at the publication prices.

Our new and enlarged CATALOGUE OF PRACTICAL AND SCIENTIFIC BOOKS, 96 pages, 8vo, and other catalogues sent free to any one who will furnish his address.

HENRY CAREY BAIRD & CO.,
Industrial Publishers, Booksellers, and Importers,
810 WALNUT STREET, PHILADELPHIA.

---

80 Samples Photo, Duplex, etc. Cards, **10c.** Autograph Album, **13c.** CONN. CARD CO., Northford, Ct.



RAPID ADDITION!
Wonderful Invention!

ART of Adding Figures from Left to Right; or from Middle either way; or six columns at one time! Done as Quick as Thought! Sent to any address on receipt of Price, 50 Cents in postage stamps.
W. F. MERRIMAN,
Batavia, N. Y.

SNOW'S DRY TRANSFER INK

DISSOLVES IN WATER. Anything written or drawn with it can be transferred in one minute to a **GELATINE PAD,** and 100 copies printed by pressure of the hand. Package to make one fluid ounce, postpaid, sealed, 25 cents, with enough of

TRANSFER "CLYCERJEL"

To make postal card size of transfer surface. Melt and cool it in a dish or on glass. Put up in cans, ¼ lb., for 25 cts. ½ lb., 50 cts. 1 lb., 75 cts., and 5 lb., $3 00, by express. ¼ lb. makes Pad of letter size. AGENTS WANTED. **SNOW & CO., Watertown, Mass.**

30,000 Manufacturers in the Western States, including Ohio, alphabetically arranged by States, towns, and individuals, including millers, sawmills, planing mills, machinists, implements and all other manufacturers. 83 pages, 12x17 in. in size, bound. Sent, postpaid, on receipt of $2. Fox, Cole & Co., pubs., Chicago. Agts. wanted.


"STEREOTYPES & ELECTROTYPES made from Drawings Prints or Photographs"
ORIGINAL DESIGNS AND SKETCHES furnished in the best artistic manner.
U.S. ENGRAVING WORKS
PHOTO PROCESS
RELIEF PLATES FOR NEWSPAPER AND BOOK ILLUSTRATIONS
ZINCOTYPE
CHEAP AND SUPERIOR SUBSTITUTES FOR WOODCUTS
SEND FOR ESTIMATES
NEW YORK
STATE WHEN YOU SAW THIS

Dr. Van Buren's World Famed Fat Reducing Pills. Superior and more reliable than any nostrum now in use. Will reduce fat persons from 2 to 6 pounds per week. Price, $1.00 per box. Address CHEMICAL MEDICINE CO., Post Office Box 17, Baltimore, Md.

STEP LADders are necessary; clothes frames valuable; ironing tables indispensable; but combined all in one and sold for $1.50 the combination is irresistible. Every family will have one. Send for it. Agents supplied. Rights for sale. Address J. H. MARTIN, Hartford, N. Y.

A 50 H. P. Stationary Steam Engine and Boiler, Planer and Matcher, Saw Mill and Box Machinery, all in good condit'n, for sale. Luke Burrell & Co., St. Johnsbury, Vt.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **59.** Price 10 cents. To be had at this office and of all newsdealers.

$10,000 INSURANCE FOR 35 Cts. ON LIFE & PROPERTY.

$10,000 will be paid to any person who can *EXPLODE A LAMP* fitted with our **SAFETY ATTACHMENT.** Mailed free for 35 cts. Four for $1. **Agents Wanted,** Male or Female.
S. S. NEWTON'S SAFETY LAMP CO.,
BINGHAMTON, N. Y.
SALESROOM, 13 WEST BROADWAY, N. Y.

BI-SULPHIDE OF CARBON.
Manufactured by **E. R. TAYLOR,** Cleveland, Oh o.

I found it was the idea and not style that people wanted.—*Ed. Everett.*

This idea is a small Vase of Tulips in natural colors, containing bottles of choice perfumery. Rimmel, perfumer to the royal families of Europe, ordered a large number last month for his establishments in London, Paris, etc.

A present for a person of taste.
With 6 best American assorted odors, $6 00
With 6 Lubin's, Paris, assorted odors, 8 00
With 6 Rimmel's assorted odors, 9 00
AM. FOUNTAIN WORKS,
Height 16 in. **68 Cortlandt St., N. Y.**

GELATINE PHOTO PROCESS.—A practical demonstration of the mode of working the gelatino-bromide process. By D. Van Monckhoven. Treating of the organization of the dark-room, the nature of the emulsion, the preparation of the gelatino-bromide emulsion, application of the emulsion to glass, the preservation of the prepared plates, exposure in the camera, development of the image, pyro development, fixing and intensifying the image, and retouching and varnishing. Illustrated with two cuts. Dr. Van Monckhoven, the author, is one of the most eminent chemists and photographers. The above paper is a most valuable contribution to the art of dry-plate photography. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **205.** Price 10 cents. To be had at this office and from all newsdealers.

TELEPHONE Works 1 mile. Price $4. Pat'd. Cir's free. HOLCOMB & CO., Mallet Creek, Ohio.

WATCHES Reduced Price List of Gold and Silver *American Watches* mailed free by N. H. White, Newark, N. J.

Baker Rotary Pressure Blower.



(FORCED BLAST)
Warranted superior to any other.
WILBRAHAM BROS.
2318 Frankford Ave.
PHILADELPHIA



RUBBER BACK SQUARE PACKING.
BEST IN THE WORLD.
For Packing the Piston Rods and Valve Stems of Steam Engines and Pumps.

B represents that part of the packing which, when in use, is in contact with the Piston Rod.
A the elastic back, which keeps the part B against the rod with sufficient pressure to be steam-tight, and yet creates but little friction.
This Packing is made in lengths of about 20 feet, and of all sizes from ¼ to 2 inches square.
JOHN H. CHEEVER, Treas. **NEW YORK BELTING & PACKING CO.,** 37 & 38 Park Row, New York.

---

20 H. P., $275. **"RELIABLE"**



Vertical and Horizontal Engines, with Waters' Governor, equal to any in simplicity, durability, and efficiency. Other sizes from 10 to 30 H. P. at prices equally low. For illustrated circular, address
HEALD, SISCO & CO.,
Baldwinsville, N. Y.

THE DRIVEN WELL.
Town and County privileges for making **Driven Wells** and selling Licenses under the established **American Driven Well Patent,** leased by the year to responsible parties, by
WM. D. ANDREWS & BRO.,
235 BROADWAY, NEW YORK.

Steel Stamps.
N.Y. STENCIL WORKS, 87 Nassau St. N.Y.

PRINCIPLES OF HORSE SHOEING.—By Geo. Fleming, V.S. A paper describing the proper method of shoeing horses so that the animal's feet may be kept always healthy and sound. How much the walls of the hoof should be reduced, and how the operation should be performed; the kind of shoes that should be selected; how they should be fitted; the number and size of nails that should be used, and how the face of the hoof should be treated. Followed by a description of a modified form of the "Charlier" method as successfully followed by the author for many years. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **205.** Price 10 cents. To be had at this office and from all newsdealers.

PHOTOGRAPH VISITING CARDS. Send **10c.** for circular and 80 samples. SEAVY BROS., Northford, Ct.

---

50 Brilliant, Chromo, and Tortoise Shell Cards, in case, with name, 10c. Outfit, 10c. HALL BROS., Northford, Ct.



Bookwalter Engine.
Compact, Substantial, Economical, and easily managed; guaranteed to work well and give full power claimed. Engine and Boiler complete, including Governor, Pump, etc., at the low price of
3 HORSE POWER..... $215 00
4½ " " 245 00
6½ " " 315 00
☞ Put on cars at Springfield, O.
JAMES LEFFEL & CO.,
Springfield, Ohio.
or 110 Liberty St., New York.

Grain Stocks How to make Money rapidly and at once, trading in Grain and Stocks. A perfected system of combinations, the result of years of experience, most valuable information for all, sent free. Old, reliable, established Exchange. A competent business man as agent wanted in every county. Good pay. Address The Chicago Public Produce Exchange, Chicago, Ill.

SALESMEN WANTED $125 A Month and Expenses selling to DEALERS SAMPLES FREE. Send 3c. STAMP to **CIGARS** insure answer. S. FOSTER & CO., Cincinnati, O.



An engine that works without Boiler. Always ready to be started and to give at once full power.
SAFETY, ECONOMY, CONVENIENCE.
Burns common Gas and Air. No steam, no coal, no ashes, no fires, no danger, no extra insurance. Almost no attendance.

THE NEW OTTO SILENT GAS ENGINE.
Useful for all work of small stationary steam engine. Built in sizes of **2, 4,** and **7** H. P. by **SCHLEICHER, SCHUMM & CO.,** 3045 Chestnut Street, Phila., Pa.
H. S. Manning & Co., 111 Liberty St., N. Y., Agents.


FULL SIZE
CLEAN CUT TEETH
A CENTS EACH
THE EMERSON PATENT INSERTED TOOTH SAW
DAMASCUS TEMPERED $100.00
GOLD PREMIUM SAWS ARE SUPERCEDING ALL OTHERS
EMERSON SMITH & CO
SEND YOUR FULL ADDRESS FOR SAWYERS OWN BOOK (FREE) TO
BEAVER FALLS PA.

Grain Speculation!
Write W. T. SOULE & CO., Commission Merchants, 130 La Salle St., Chicago, Ill., for Circulars.

To Electro-Platers.
BATTERIES, CHEMICALS, AND MATERIALS, in sets or single, with Books of Instruction for Gold, Silver, or Nickel Plating. THOMAS HALL, Manufacturing Electrician, 19 Bloomfield Street, Boston, Mass. Illustrated Catalogue sent free.

Roots' Positive Blast Blower.



P. H. & F. M. ROOTS, M'f'rs, Connersville, Ind.
S. S. TOWNSEND, Gen. Agt., 6 Cortlandt St., WM. COOKE, Selling Agent, NEW YORK.
☞ SEND FOR PRICED CATALOGUE.

THE SUTRO TUNNEL. BY ADOLPH Sutro. An interesting address, giving the history of this celebrated mining tunnel, from its inception up to the present time, and the reasons that led to the undertaking; describing the methods that have been used in construction, the difficulties that have been encountered, and the obstacles to progress that have been met with; and prefaced by a valuable account of the discovery of the Comstock lode, and of the geological formations of the gold and silver deposits of California. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **205.** Price 10 cents. To be had at this office and from all newsdealers.

MACHINERY FROM AN INSURANCE Point of View. By H. J. Waters. An able paper, pointing out the various factors which combine to cause a rapid depreciation in the value of all kinds of machinery. Depreciation and fire risks through friction, incompetent workmen, the tension of belting, and dust and dirt. Careful estimates of the amount of depreciation in planing mills; on shafting, hangers, pulleys, and belting; on flouring mills, middlings purifiers, smutters and separators, elevators, cups, and belts, stave and heading factories, and on the heavy machinery used by iron workers. General conclusions of the author as a result of the foregoing study. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **204** and **205.** Price 10 cents each. To be had at this office and from all newsdealers.

---

60 Queen Anne and Photo Cards, illuminated and perfumed, in case, **10c.** GLOBE PRINT CO., Northford, Ct.

Wood-Working Machinery,
Such as Woodworth Planing, Tonguing, and Grooving Machines, Daniel's Planers, Richardson's Patent Improved Tenon Machines, Mortising, Moulding, and Re-Saw Machines. Eastman's Pat. Miter Machines, and Wood-Working Machinery generally. Manufactured by
WITHERBY, RUGG & RICHARDSON,
26 Salisbury Street, Worcester, Mass.
(Shop formerly occupied by R. BALL & CO.)

SCRAP IRON and Old Rails supplied, for cash, in quantities and of qualities to suit the American markets, by A. NORRINGTON & CO., 34 Great St. Helens, London, England. First-class references given.

The George Place Machinery Agency
Machinery of Every Description.
121 Chambers and 103 Reade Streets, New York.

FOR AUTOMATIC CUT-OFF FIXED CUT-OFF & SLIDE VALVE STEAM ENGINES ROCHESTER N.Y. ALSO BOILERS ADDRESS WOODBURY BOOTH & PRYOR.

YOUR NAME and ADDRESS on **50** Gilt, Duplex, etc., Cards, in case, **15c.** DAVID BROS., Northford, Ct.

GEO. W. TIFFT, SONS & CO., BUFFALO, N. Y., Specialties 4 to 40 H. P. Engines and Boilers, Sugar Cooling Wagons, Machinery, Steam Kettles, etc.

Pond's Tools,
Engine Lathes, Planers, Drills, &c.
DAVID W. POND, Worcester, Mass.

WOOD WORKING MACHINERY.

J. A. FAY & CO.
CINCINNATI, O. U. S. A.

$2 WATCHES. Cheapest in the known world. Agents wanted. Address COULTER & CO., Chicago.

---

62 Gold, Crystal, Lace, Perfumed, and Chromo Cards, name in Gold & Jet 10c. Clinton Bros. Clintonville, Ct.

SPARE THE CROTON AND SAVE THE COST.
Driven or Tube Wells
furnished to large consumers of Croton and Ridgewood Water. WM. D. ANDREWS & BRO., 235 Broadway, N.Y., who control the patent for Green's American Driven Well.

JOHN R. WHITLEY & CO.
European Representatives of American Houses, with First-class Agents in the principal industrial and agricultural centers and cities in Europe. London, 7 Poultry, E. C. Paris, 8 Place Vendôme. Terms on application. J. R. W. & Co. purchase Paris goods on commission at shippers' discounts.



Furnace Hoist.

ELEVATORS.
All kinds of Hoisting Machinery a specialty. Steam, Hydraulic, and Belt Power for Passengers and Freight. Iron Furnace Lifts, Portable Hoists. STOKES & PARRISH, 30th and Chestnut St., Phila, Pa.

A GOOD PLAN. Combining and operating many orders in one vast sum has every advantage of greatest capital, with best skillful management. Large profits divided pro rata, on investments of $25 to $10,000. Circular, with full explanations how all can succeed in stock dealings, mailed free. LAWRENCE & CO., 55 Exchange Place, New York.

$777 A YEAR and expenses to agents. Outfit Free. Address P. O. VICKERY, Augusta, Maine.

Patent Steam Friction Crane



Will coal locomotive in three minutes. Two machines will load or unload 1,000 tons per day of coal or ore. The best and cheapest.
NOBLE & HALL,
ERIE, PA.

---

60 New Styles Chromo and Floral Cards, in case, **10c.** 80 agts.' samples, **10c.** Stevens Bros, Northford, Ct.

ICE AND ICE HOUSES—HOW TO MAKE ice ponds; amount of ice required, etc., and full directions for building ice-house, with illustrated plan. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **55.** Price 10 cents. To be had at this office and of all newsdealers.





PATENT SPARK-ARRESTER.
8 H. P. Mounted,
10 " "
12 " "
2-H. P. Eureka, $150.
4 " " 250.
6 " " 350.
Send for our Circulars.
B. W. Payne & Sons, Corning, N. Y.
State where you saw this.

WANTED—THE BEST APPARATUS FOR GRINDing and pulverizing tough clays in a semi-moist state. Address **A. D. T.,** Box 773, New York.

CARY & MOEN
STEEL WIRE OF EVERY DESCRIPTION & STEEL SPRINGS.
234 W. 29. ST. NEW YORK CITY

A FORTUNE QUICKLY MADE.

Money has been made more rapidly within the last few months in Wall Street than at any period since 1873. Immense profits have been realized from small investments. The following affidavit explains itself:

Personally appeared before me, George A. Payne, of 134 West 49th Street, New York city, to me known, and, on being duly sworn, says that on an investment of $25 placed with Thatcher, Belmont & Co., bankers, and by them operated for a period of two weeks, I had returned to me by the said firm $972.53.

(Signed) GEO. A. PAYNE.
State of New York, } ss.
City and County of New York, }
Sworn before me this 22d September, 1879.
J. B. NONES, Notary Public,
91 Duane Street, N. Y.

Thatcher, Belmont & Co., accept subscribers on their 1 per cent. margin or in their concentration of capital, whereby a number of small sums, from $10 upwards, are aggregated and stocks operated. Latest Wall Street information sent free upon application by Messrs. Thatcher, Belmont & Co., Bankers, P. O. Box 1307, or 48 Broad Street, New York.

A REVOLVER GIVEN AWAY.

The largest and costliest Catalogue of Revolvers, &c., in the world, containing exact pictures of *nearly every Revolver in existence;* a valuable book of reference in itself. **Sent free** to any address. ☞ $6. 32 calibre Revolvers reduced to $2.75. **Colt** Revolvers, $2.50. BIGGEST BARGAINS EVER KNOWN. A CHANCE FOR ONE MAN IN EVERY TOWN IN THE UNITED STATES TO GET A **$6** REVOLVER FREE. Address the **Essex Repeating Arms Company, 57 Washington St., Boston, Mass., U. S. A.**

ICE-BOAT WHIFF.—FULL WORKING drawings and description, with dimensions of the model ice-yacht Whiff, the fastest yacht in the world. Exhibited at the Centennial, by Irving Grinnell. With 14 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **63.** Price 10 cents. To be had at this office and at all news stores. Any intelligent person, with the aid of the drawings and directions given in the above numbers of the SUPPLEMENT, may readily construct a first-class ice-boat, of any desired size, at a small cost.

ICE-BOATS — THEIR CONSTRUCTION and management. With working drawings, details, and directions in full. Four engravings, showing mode of construction. Views of the two fastest ice-sailing boats used on the Hudson river in winter. By H. A. Horsfall, M.E. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **1.** The same number also contains the rules and regulations for the formation of ice-boat clubs, the sailing and management of ice-boats. Price 10 cents.

50,000 Agents wanted by 1,000 advertisers in the Agents' Herald, Box 5, Philadelphia, Pa.


MACHINE KNIVES
FOR PAPER MILLS, BOOK-BINDERS, WOOD WORKING AND AGRICULTURAL MACHY.
ALSO PARALLEL VISES FOR MACHINISTS, PIPE FITTERS, BLACKSMITHS, WHEELWRIGHTS, PATTERN MAKERS &C.
MANUFACTURED BY TAYLOR STILES & CO. RIEGELSVILLE WARREN CO. N.J.

Cigar Box Lumber,
MANUFACTURED by our NEW PATENT PROCESS.
The Best in the World.
SPANISH CEDAR, MAHOGANY, POPLAR.

Also thin lumber of all other kinds, 1/8 to ½ in., at corresponding prices. All qualities. Equal in all respects to any made, and at prices much under any to be obtained outside of our establishment. Send for price list.
GEO. W. READ & CO.,
186 to 200 Lewis Street, N. Y.

---

1 Gilt-Bound Autograph Album, **15c. 75** styles Chromo Cards, **10c.** CHROMO CARD CO., Northford, Ct.

RELIABLE

DYKES' BEARD ELIXIR
A Wonderful Discovery. Forces heavy Moustache or Beard even on smooth faces in from 20 to 30 days. These cuts are from the original, and show a positive result from its use. It works like magic and never fails. No possible injury to the skin, easily applied and certain in effect. Pkg. post-paid 25cts. 3 for 50cts. L. L. SMITH & CO. Sole Ag'ts, Palatine, Ill. All others counterfeit.

I WANT An experienced man, with capital, to join me in a **Variety Wood Working Factory.** The best opening in the South-west. Address **W. W. PEARCE, Cuero, De Witt Co., Texas.**

A New Spinning Band.
ROWBOTTOM'S PATENT DOUBLE LOOPED SPINNING BAND. Suitable for all kinds of Spinning and Doubling Frames for Woolen, Worsted, Cotton, Flax, or other fibrous substances. **IS FREE FROM KNOTS,** neat, speedily adjusted, runs steadily, and avoids the annoyance of Lint. Price, fifty cents per pound, delivered at the mill. Sample orders solicited. State kind of machinery, diameter of Driving Cylinder and actual length required when in operation.
STODDARD, LOVERING & CO., Sole Agents, No. 10 Milk Street, Boston, Mass.

THE SKINNER PORTABLE & STATIONARY ENGINES BOILERS & GOVERNORS
FIRST CLASS & ECONOMICAL SKINNER & WOOD, ERIE, PA.
SEE ILLUSTRATED ADVERTISEMENT

WATCHES From $2 up; other goods in proportion. Mammoth Illustrated CATALOGUE **FREE**
E. NASON & CO., 111 Nassau Street, New York.

WANTED—Salesmen to take general State Agencies. Salary and expenses paid. References required. TRIUMPH M'F'G CO., 116 Monroe St., Chicago, Ill.

$10 to $1000! Invested in Wall St. Stocks makes fortunes every month. Book sent free explaining everything. Address BAXTER & CO., Bankers, 7 Wall St., New York.

© 1879 SCIENTIFIC AMERICAN, INC

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.
(About eight words to a line.)

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

☞ The publishers of this paper guarantee to advertisers a circulation of not less than 50,000 copies every weekly issue.

WOOD SOLE SHOES.

The cheapest, most durable, best looking, and thoroughly waterproof shoe. Send for circular to

CHAS. W. COPELAND,
122 Summer St., Boston, Mass.

COTTON SEED PRESSES.
Eight Hydraulic Box Presses, with Pumps and Heaters complete. Also Double Steam Engine, with cylinders of 26 in. bore and 42 inches stroke.
Address P. O. Box 1181, N. Y. City.

Pyrometers, For showing heat of Ovens, Hot Blast Pipes, Boiler Flues, Superheated Steam, Oil Stills, etc.
HENRY W. BULKLEY, Sole Manufacturer,
149 Broadway, N. Y.

GRAND HOLIDAY OFFER!

1,000 Grand, Square and Upright Pianos.
3,000 Church, Cabinet and Parlor Organs.
My own manufacture, in every variety of style, now offered at Prices lower than ever before. **PIANOS, $145, $150, $165, $225, $250** and upwards, including Cover, Stool and Book.
ORGANS, $45, $62, $75, $80, $85, $90, $100, $120, and upwards, including Stool and Book.
All instruments fully warranted for **SIX YEARS** and shipped on **15 DAYS' TEST TRIAL.** Send for illustrated Catalogue containing full information. Address the Manufacturer
JAMES T. PATTERSON,
P.O. Drawer 12. Bridgeport, Conn., U.S.A.

PROSPECTING MINERAL LANDS A SPECIALITY.
CYLINDRICAL SECTIONS OR CORES OBTAINED THE WHOLE DISTANCE BORED. ARTESIAN WELLS BORED ROUND AND STRAIGHT ADMITTING A LARGER PUMP AND CASING IN PROPORTION TO SIZE OF HOLE THAN BY ANY OTHER PROCESS. ESTIMATES GIVEN AND CONTRACTS MADE BY THE PENNSYLVANIA DIAMOND DRILL CO. BOX 423 POTTSVILLE PA. MANFTRS. OF DIAMOND DRILLS FOR ALL KINDS OF ROCK BORING.



Gear Molding without Patterns

Scott's Gear Moulding Machines,

AIR COMPRESSORS & ROCK DRILLS.

DELAMATER IRON WORKS,

Boiler Makers, Engine Builders, and Founders,

FOOT OF W. 13th ST., North River, NEW YORK.

ESTABLISHED 1841.

Mill Stones and Corn Mills.

We make Burr Millstones, Portable Mills, Smut Machines, Packers, Mill Picks, Water Wheels, Pulleys, and Gearing specially adapted to Flour Mills. Send for catalogue.
J. T. NOYE & SON, Buffalo, N. Y.

GOULD'S HAND AND POWER PUMPS should be used by every household, factory, railroad, steamboat, or mine, and will give satisfaction. They make them for all purposes and uses. Illustrated catalogues furnished upon application. Kept by all dealers throughout the country. THE GOULDS M'F'G CO., Factory, Seneca Falls, N. Y. Warehouse, 15 Park Pl., N.Y. ☞ *Inquire for Goulds' Pumps.*

To Business Men.

The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is ten times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. If it is worth 25 cents per line to advertise in a paper of three thousand circulation, it is worth $4 per line to advertise in one of forty-eight thousand.

The circulation of the SCIENTIFIC AMERICAN is guaranteed to exceed FIFTY THOUSAND *every week.*

For advertising rates see top of first column of this page, or address

MUNN & CO., Publishers,
37 Park Row, New York.

CARNEGIE BROS & CO
UNION IRON MILLS
PITTSBURGH PA.
WROUGHT IRON BEAMS
CHANNELS TEES & ANGLES

The attention of Architects, Engineers, and Builders is called to the great decline in prices of wrought
STRUCTURAL IRON.
It is believed that, were owners fully aware of the small difference in cost which now exists between iron and wood, the former, in many cases, would be adopted, thereby saving *insurance* and avoiding all risk of *interruption* to *business* in consequence of fire. Book of detailed information furnished on application.

H.W. JOHNS' ASBESTOS

Liquid Paints, Roofing, Boiler Coverings,
Steam Packing, Sheathings, Fire Proof Coatings, Cements, &c. SEND FOR DESCRIPTIVE PRICE LIST.
H.W. JOHNS M'F'G CO. 87 MAIDEN LANE, N.Y.

BOILER COVERINGS.

WITH THE "AIR SPACE" IMPROVEMENTS.
THE CHALMERS-SPENCE CO., Foot E. 9th St., New York. Sole owners of the Air Space Patents.

ST. NICHOLAS.

"There is nothing in the whole world to compare with it in point of literary merit, attractiveness, or richness and abundance of illustration."—Chicago Tribune, Nov. 22d, 1879.

THE WONDERFUL
CHRISTMAS HOLIDAY NUMBER.

This December number, with its bright, new Christmas cover, contains

TWELVE SHORT STORIES

by J. T. TROWBRIDGE, WASHINGTON GLADDEN, J. W. DE FOREST, MAURICE THOMPSON, SARAH WINTER KELLOGG, and others; also the first chapters of a

SERIAL STORY BY LOUISA M. ALCOTT,

"Jack and Jill," written in the author's best vein; the second installment of a

CAPITAL SERIAL FOR THE BOYS,

by WILLIAM O. STODDARD, to run some months. (A long story, also for boys, by NOAH BROOKS, author of "The Boy Emigrants," will begin soon.)

JOHN GREENLEAF WHITTIER

contributes a long poem, while LUCY LARCOM and MARY MAPES DODGE are also represented in verse.

GUSTAVE DORE, KNAUS, MARY HALLOCK FOOTE, KELLY, DIELMAN, BENSELL, SHEPPARD, EYTINGE, JESSIE CURTIS, and ADDIE LEDYARD are among the artists whose labor has helped to make beautiful this number of

"THE WORLD'S CHILD-MAGAZINE,"

as ST. NICHOLAS may now properly be called. Its circulation here has steadily increased until the present edition is 75,000. It is growing in popularity in England, where it is published by SAMPSON LOW, MARSTON & Co., of London, and an edition in the French language is to be issued in Paris by M. CHARLES DELAGRAVE.

A PERMANENT ENLARGEMENT

has been made in the size of the magazine, by which the present volume will contain some 200 additional pages. Besides the serial stories above mentioned, each number will contain short stories, descriptive articles, tales of travel and adventure, poems, jingles, large type for the very little folks, and a riddle-box for the family circle.

SUBSCRIBE NOW

for the year. Price $3.00; single number 25 cents. Your news-dealer and post-master will supply it, or the publishers will send it, postage paid, to any address on receipt of the price. Send check or P. O. money order, or register your letter.

SCRIBNER & CO.,
743 Broadway, New York.



STEAM PUMPS.

HENRY R. WORTHINGTON,
239 Broadway, N. Y. 83 Water St., Boston.

THE WORTHINGTON DUPLEX PUMPING ENGINES FOR WATER WORKS—Compound, Condensing or Non-Condensing. Used in over 100 Water-Works Stations.
STEAM PUMPS—Duplex and Single Cylinder.

Price list issued Jan. 1, 1879, with a reduction exceeding 30 per cent.

WATER METERS. OIL METERS.



THE FORSTER-FIRMIN GOLD AND SILVER AMALGAMATING COMP'Y of Norristown, Pa., will grant state rights or licenses on easy terms. This system works up to assay, and recovers the mercury rapidly. Apply as above.

60 Pin-a-4, Photo, Gilt-Edge, etc., Cards, and **1** Hudson Valley Chromo, **10c.** DAVIDS & Co., Northford, Ct.

ICE-HOUSE AND REFRIGERATOR.—Directions and Dimensions for construction, with one illustration of cold house for preserving fruit from season to season. The air is kept dry and pure throughout the year at a temperature of 34° to 36°. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **116.** Price 10 cents. To be had at this office and of all newsdealers.

WANTED—AN UPHOLSTERER AND DRAPER. Address "B," care Box 387, Cincinnati, O.

NEW AND 2D-HAND ENGINES AND BOILERS CHEAP for cash. O. B. GOODWIN, Oil City, Pa.

THE PICTET ARTIFICIAL ICE COMPANY, Limited,
Ice Machines to make from 20 pounds per hour to 50 tons per day, at 36 Cortlandt St., New York. P. O. Box 3083.

THE HEKTOGRAPH.

In use everywhere. Office, 22 Church St., New York.

J. LLOYD HAIGH,
Manufacturer of

WIRE ROPE

of every description, for Railroad and Mining Use, Elevators, Derricks, Rope Tramways, Transmission of Power, etc. No. 81 John St., N. Y. Send for price list. Plans and Estimates furnished for Suspension Bridges.

COLUMBIA BICYCLE.
A practical road machine. Indorsed by the medical profession as the most healthful of outdoor sports. It augments three-fold the locomotive power of any ordinary man. Send 3c. stamp for 24 page catalogue, with price list and full information.
THE POPE M'F'G CO.,
89 Summer Street, Boston, Mass.

MACHINISTS' TOOLS.

NEW AND IMPROVED PATTERNS.
Send for new illustrated catalogue.
Lathes, Planers, Drills, &c.
NEW HAVEN MANUFACTURING CO.,
New Haven, Conn.

SHAFTING, PULLEYS, HANGERS, ETC.,

of superior quality, a specialty. P. PRYIBIL,
461-467 West 40th Street, New York.

WIRE ROPE

Address JOHN A. ROEBLING'S SONS, Manufacturers, Trenton, N. J., or 117 Liberty Street, New York.
Wheels and Rope for conveying power long distances. Send for circular.

ORGAN BEATTY PIANO
NEW ORGANS **13** Stops, **3** set Golden Tongue Reeds, **5** Oct's, **2** Knee Swells, Walnut Case, warr't **6** years, Stool & Book **$98.** New Pianos, **$143** to **$255.** ☞ Newspapers sent **Free.**
Address **Daniel F. Beatty, Washington,** New Jersey.

For Blasting. Safe, Reliable, Economical.
MINERS' SUPPLY CO.,
St. Clair, Schuylkill Co., Pa.

ROOFING.

For steep or flat roofs. Applied by ordinary workmen at one-third the cost of tin. Circulars and samples free.
T. NEW, 32 John Street, New York.



The J. L. Mott Iron Works,
88 and 90 BEEKMAN ST.,
Manufacturers of
DEMAREST'S PATENT
WATER CLOSETS.
Simple in construction, perfect in operation, thoroughly excluding all sewer gas, and cleanly in every way.

HARTFORD STEAM BOILER Inspection & Insurance COMPANY.

W. B. FRANKLIN, V. Pres't. J. M. ALLEN, Pres't.
J. B. PIERCE, Sec'y.



Wheeler's Patent Wood Filler

fills the pores of wood perfectly, so that a smooth finish is obtained with one coat of varnish. Send for circular. Mention this paper.
BRIDGEPORT WOOD FINISHING CO.,
40 Bleecker Street, New York.

WATSONS NON CHANGEABLE GAP LATHE HAS GREAT FACILITIES FOR LARGE OR MEDIUM SIZE WORK JAMES WATSON MANF'R 1608 S. FRONT ST. PHILA. PA.

PETROLEUM AND ITS EXAMINATION.—By A. Bourgougnan. A description, read before the American Chemical Society, of the methods adopted by the author in his examinations of crude petroleum, refined pretroleum, naphtha, and residuum; preceded by an interesting account of the geographical distribution of oil-bearing strata, and the processes of obtaining the crude product; with valuable tables showing the hydrocarbons that have been eliminated from petroleum, and comparisons of the oils obtained from various parts of the world, as regards their volatile products, specific gravities, etc. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **204.** Price 10 cents. To be had at this office and from all newsdealers.

BOILER PRESSES,
STILES & PARKER PRESS CO., Middletown, Ct.



SHEPARD'S CELEBRATED
$50 Screw Cutting Foot Lathe.
Foot and Power Lathes, Drill Presses, Scrolls, Circular and Band Saws, Saw Attachments, Chucks Mandrels, Twist Drills, Dogs, Calipers, etc. Send for catalogue of outfits for amateurs or artisans.
H. L. SHEPARD & CO.,
331, 333, 335, & 337 West Front Street,
Cincinnati, Ohio.

Working Models

And Experimental Machinery, Metal or Wood, made to order by J. F. WERNER, 62 Centre St., N. Y.

THE TANITE CO.,

STROUDSBURG, PA.
EMERY WHEELS AND GRINDERS.
LONDON—9 St. Andrews St., Holborn Viaduct, E. C.
LIVERPOOL—42 The Temple, Dale St.

ROCK DRILLING MACHINES AND AIR COMPRESSORS,
MANUFACTURED BY BURLEIGH ROCK DRILL CO.
SEND FOR PAMPHLET. FITCHBURG, MASS.

FRIEDMANN'S PATENT
EJECTORS

Are the cheapest and most effective machines in the market for

Elevating Water and Conveying Liquids

from Mines, Quarries, Ponds, Rivers, Wells, Wheel Pits; for use in R. R. Water Stations, Factories, etc. They are splendidly adapted for conveying liquids in Breweries, Distilleries, Sugar Refineries, Paper Mills, Tanneries, Chemical Works, etc. Send for illus. catalogue to

NATHAN & DREYFUS,
Sole Manufacturers, *NEW YORK.*

$3 Printing Press
Prints cards labels &c. (Self-inker $5) **13** larger sizes For business or pleasure, young or old. Do your own advertising and printing. Catalogue of presses, type, cards, &c., for 2 stamps. **Kelsey & Co. Meriden, Conn**

Lathes, Planers, Shapers

Drills, Bolt and Gear Cutters, Milling Machines. Special Machinery. E. GOULD & EBERHARDT, Newark, N. J.

WM. A. HARRIS,
PROVIDENCE, R. I. (PARK STREET),
Six minutes walk West from station.
Original and Only builder of the
HARRIS-CORLISS ENGINE
With Harris' Patented Improvements, from 10 to 1,000 H. P.

BROWN'S PAT. SPLIT Shafts, Hangers, PULLEYS
At low prices. Largest assortment. A. & F. BROWN, 57, 59, & 61 Lewis St., New York.

1880. 1880. 1880.

The Scientific American

FOR 1880.

THIRTY-FIFTH YEAR.

VOLUME XLII. NEW SERIES.

The publishers of the SCIENTIFIC AMERICAN beg to announce that on the Third day of January, 1880, a new volume will be commenced. It will continue to be the aim of the publishers to render the contents of the new volume as attractive and useful as any of its predecessors.

Only $3.20 a Year including Postage. Weekly. 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information, and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc.

All Classes of Readers find in THE SCIENTIFIC AMERICAN a popular *resume* of the best scientific information of the day; and it is the aim of the publishers to present it in an attractive form, avoiding as much as possible abstruse terms. To every intelligent mind, this journal affords a constant supply of instructive reading. It is promotive of knowledge and progress in every community where it circulates.

Terms of Subscription.—One copy of THE SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States or Canada, on receipt of **three dollars and twenty cents** by the publishers; six months, $1.60; three months, $1.00.

Clubs.—One extra copy of THE SCIENTIFIC AMERICAN will be supplied gratis *for every club of five subscribers* at $3.20 each; additional copies at same proportionate rate. Postage prepaid.

One copy of THE SCIENTIFIC AMERICAN and one copy of THE SCIENTIFIC AMERICAN SUPPLEMENT will be sent for one year, postage prepaid, to any subscriber in the United States or Canada, on receipt of *seven dollars* by the publishers.

The safest way to remit is by Postal Order, Draft, or Express. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

MUNN & CO.,
37 Park Row, New York.

To Foreign Subscribers.—Under the facilities of the Postal Union, the SCIENTIFIC AMERICAN is now sent by post direct from New York, with regularity, to subscribers in Great Britain, India, Australia, and all other British colonies; to France, Austria, Belgium, Germany, Russia, and all other European States; Japan, Brazil, Mexico, and all States of Central and South America. Terms, when sent to foreign countries, Canada excepted, $4, gold, for SCIENTIFIC AMERICAN, 1 year; $9, gold, for both SCIENTIFIC AMERICAN and SUPPLEMENT for 1 year. This includes postage, which we pay. Remit by postal order or draft to order of Munn & Co., 37 Park Row, New York.

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Philadelphia, and 50 Gold St., New York

© 1879 SCIENTIFIC AMERICAN, INC